

Supplemental Guidelines on Mainstreaming
Climate Change and Disaster Risks
in the Comprehensive Land Use Plan



HOUSING AND LAND USE REGULATORY BOARD



Supplemental Guidelines on Mainstreaming Climate and Disaster Risks in the Comprehensive Land Use Plan



Copyright 2015 Housing and Land Use Regulatory Board Climate Change Commission United Nations Development Programme Department of Foreign Affairs and Trade – Australian Aid

All rights reserved. Any part of this book may be used or reproduced provided proper acknowledgement is made.

Published by the Housing and Land Use Regulatory Board Climate Change Commission United Nations Development Programme Department of Foreign Affairs and Trade – Australian Aid

For Inquiries, please contact:
Policy Development Group, Housing and Land Use Regulatory Board
HLURB Bldg., Kalayaan Avenue, cor. Mayaman St., Diliman, Quezon City 1101, Philippines
Telephone Numbers: (+63-2) 929-7798
Email:pdg@hlurb.gov.ph

Supplemental
Guidelines

Mainstreaming Climate and
Disaster Risks in the
Comprehensive Land Use Plan



FOREWORD

The Philippines ranks third among most countries at risk in the world because of vulnerability and susceptibility to natural hazards of its exposed population. This situation is further aggravated by threats like climate change. Meteorological and meteorologically-induced hazards have intensified within the last decade, resulting in increased deaths and economic devastation, especially in areas that are unprepared for such phenomena.

A more focused intervention prioritizing climate change adaptation and disaster risk reduction in the country's cities and municipalities needs to be put in place, noting that our LGU's vulnerabilities are becoming more pronounced.

This Supplemental Guideline was developed in compliance with two (2) landmark national laws, the *Climate Change Act of 2009* and the *Disaster Risk Reduction and Management Act of 2010*. This is also HLURB's response to address and support for our local government units to mainstream Climate Change Adaptation (CCA) and Disaster Risk Reduction (DRR) into the Comprehensive Land Use Plans and Zoning Ordinances.

The Supplemental Guidelines on Mainstreaming Climate Change and Disaster Risks in the Comprehensive Land Use Plan is a complementary tool to the three volume enhanced HLURB CLUP Guidebooks (2013-2014) to assist our city and municipal planners in the assessment of risks and vulnerability in their respective cities and municipalities.

We highly appreciate the successful partnership of the HLURB, the Climate Change Commission (CCC), the United Nations Development Program (UNDP) and the Australian Aid (AusAid) in the preparation of this supplemental guideline.

Everyone is enjoined to utilize this guideline to mainstream climate and disaster risks in the CLUP to ensure that appropriate policies, strategies and interventions are put in place to increase adaptive capacities and resilience of our communities from a rapidly changing environment.

ANTONIO M. BERNARDO

Chief Executive Officer and Commissioner Housing and Land Use Regulatory Board

BOARD OF COMMISSIONERS

RESOLUTION NO. 915

Series of 2014

APPROVING THE SUPPLEMENTAL GUIDELINES FOR MAINSTREAMING CLIMATE CHANGE ADAPTATION AND DISASTER RISK REDUCTION IN THE COMPREHENSIVE LAND USE PLAN

WHEREAS, Executive Order 648 provided that it is the policy of the state to implement an integrated program of land use control that aims to foster growth and development of our urban and rural communities in an integrated manner that promotes optimum land use, adequate and safe settlements' development and environmental protection towards the promotion of general welfare;

WHEREAS, the Housing and Land Use Regulatory Board is empowered under Section 4 (a) of Executive Order 648 to "promulgate zoning and other land use control standards and guidelines that shall govern land use plans and zoning ordinances of local governments;

WHEREAS, the enhanced Comprehensive Land Use Plan guidebooks mainstreamed climate change adaptation and disaster risk reduction in land use planning to increase preparedness and adaptation measures by local communities:

WHEREAS, it is likewise imperative that local government units formulate climate and disaster risk-sensitive CLUPs/ZOs that regulate allocation of land use so that exposure and vulnerability of population, infrastructure, economic activities and the environment to natural hazards and climate change can be minimized or even prevented;

WHEREAS, there is a need for a supplemental guidelines that will provide a process of understanding risks and making them part of land use allocation and zoning decisions;

WHEREFORE, be it RESOLVED as it is hereby RESOLVED that the "SUPPLEMENTAL GUIDELINES ON MAINSTREAMING CLIMATE AND DISASTER RISKS IN THE COMPREHENSIVE LAND USE PLAN", an integral

HLURB Board Resolution No. 915, S. of 2014

Approving the Supplemental Guidelines for Mainstreaming Climate Change Adaptation and Disaster Risk Reduction in the Comprehensive Land Use Plan

component of the land use planning processes as outlined in the CLUP Guidebooks, Volumes 1 to 5 be **APPROVED** as the same is hereby **APPROVED**.

APPROVED, 24 February 2014, Coconut Palace, Pasay City.

HON. JEJOMAR C. BINAY

Vice-President of the Philippines and HLURB Chairman

AUSTERE A. PANADERO

Undersecretary, DILG Ex-Officio Commissioner ANTONIO M. BERNARDO

Chief Executive Officer and Commissioner

JAIME A. PACANAN

Undersecretary, DPWH Ex-Officio Commissioner

EMMANUEL F. ESGUERRA

Deputy Director-General, NEDA Ex-Officio Commissioner

JOSE F. JUSTINIANO

Undersecretary, DOJ & Ex-Officio Commissioner RIA CORAZON GOLEZ CABRERA

Commissioner

LUIS ALVAREZ PAREDES

Commissioner

LINDA LAMALENAB HORNILLA

Commissioner

ATTY. CHARITO B. LANSANG

Attested:

Board Secretary

Table of Contents

List of Tables	ii		
List of Figures	V		
Acronyms	vii		
Executive Summary	ix		
Introduction	1		
Policy Context	1		
Rationale	2		
Benefits of mainstreaming	2		
Features of the Guidelines	3		
Structure of the Guidelines	6		
Mainstreaming Framework	7		
Climate and Disaster Risk Assessment (CDRA) Process	8		
Integrating Climate and Disaster Risks in the Comprehensive Land Use Plan	36		
Climate and Disaster Risk Assessment	40		
Step 1. Collect and analyze climate and hazard information	40		
Step 2. Scoping the potential impacts of disasters and climate change	54		
Step 3. Exposure Database Development	59		
Step 4. Conduct a Climate Change Vulnerability assessment (CCVA)	72		
Step 5. Disaster Risk Assessment (DRA)	114		
Step 6. Summarize Findings	162		
Formulating a Risk Sensitive Land Use Plan	165		
Situational Analysis	168		
Set the Goals and Objectives	190		
Selection of the preferred spatial strategy	197		
Climate and Disaster Risk Sensitive Land Use Planning	201		
Climate Risk Sensitive Zoning Ordinance	213		
Implementation of the CLUP and ZO	220		
Monitoring and evaluation	221		
Glossary of Terms	223		
Annex: Fundamental Concepts			
References	240		

List of Tables

Table 2.1 Climate Change Projections for Misamis Oriental, Region 10	10
Table 2.2 Summary of Climate change variables	12
Table 2.3 Summary of Climate change effects and impacts	13
Table 2.4 Recommended Population Exposure, Sensitivity/Vulnerability and Adaptive Capacity Indicators	15
Table 2.5 Recommended Urban Use Area Exposure, Sensitivity/Vulnerability and Adaptive Capacity Indicators	16
Table 2.6 Natural Resource based Production Areas Exposure, Sensitivity/Vulnerability and Adaptive Capacity Parameters	17
Table 2.7 Critical point facilities Exposure, Sensitivity/Vulnerability and Adaptive Capacity Parameters	18
Table 2.8 Lifeline Utilities Exposure, Sensitivity/Vulnerability and Adaptive Capacity Parameters	19
Table 2.9 Degree of Impact Score	22
Table 2.10 Adaptive capacity score and description	23
Table 2.11 Vulnerability Index Scores	23
Table 2.12 Indicative Likelihood of Occurrence Scores	26
Table 2.13 Severity of Consequence Score Matrix	29
Table 2.14 Risk Score Matrix for Prioritization	30
Table 2.15 Sample Issues Matrix Urban Use Areas	34
Table 3.1.1 Seasonal Temperature increases (in oC) in 2020 and 2050 under the medium-range emission scenario in provinces in Region 10	41
Table 3.1.2 Medium emission range projected seasonal temperature scenarios for 2020 and 2050, Province of Misamis Oriental	41
Table 3.1.3 Seasonal rainfall change (in %) in 2020 and 2050 under the medium-range emission scenario in provinces in Region 10	42
Table 3.1.4. Medium emission range projected seasonal rainfall scenarios for 2020 and 2050, Province of Misamis Oriental	42
Table 3.1.5 Frequency of extreme events in 2020 and 2050 under medium-range emission scenario, Province of Misamis Oriental	43
Table 3.1.6. Summary of Projected Changes in Climate Variables, Municipality of Opol, Misamis Oriental	44
Table 3.1.7 Hazard maps and data sources	46
Table 3.1.8 Sample Inventory of Hazards and their description	51
Table 3.1.9. Records of Previous Disasters, Municipality of Bacuag (1993-2011)	52
Table 3.1.10 . Sample Hazard Susceptibility Inventory Matrix	53
Table 3.2.1. Summary of Projected Changes in Climate Variables and potential affected exposure unit/s, Municipality of Opol	55
Table 3.2.2 Summary of Climate change Impacts, Municipality of Opol	58
Table 3.3.1 Sample Population Exposure Database	61
Table 3.3.2 Sample Urban Use Area Exposure Attribute Table	63
Table 3.3.3 Sample Natural Resource Production Area Exposure Attributes	65
Table 3.3.4 Sample Critical Point Facilities Exposure Attribute Table	68
Table 3.3.5 Sample Lifeline Utilities Exposure Attribute Table	71
Table 3.4.1 Sample Impact Area and Climate Stimuli	72
Table 3.4.2a Population Exposure Estimation	75
Table 3.4.2b Sample Natural Resource Production Area Exposure Table	77
Table 3.4.2c Sample Urban Use Area Exposure Table, Municipality of Opol	79
Table 3.4.2d Critical Point Facilities Exposure to flood per Barangay, Municipality of Opol.	81

Table 3.4.2e Lifeline Utilities Exposure to Sea Level Rise, Municipality of Opol.	83
Table 3.4.3 Degree of Impact Score	84
Table 3.4.4a Population Degree of Impact Rating	85
Table 3.4.4b Natural Resource based Production Areas, Degree of Impact Rating, Coastal Impact Areas	86
Table 3.4.4c Urban Use Area, Degree of Impact Rating, Coastal Impact Areas	87
Table 3.4.4d Critical Point Facilities, Degree of Impact Rating, Coastal Impact Areas	88
Table 3.4.4e Lifeline Utilities, Degree of Impact Rating, Coastal Impact Areas	89
Table 3.4.5 Adaptive capacity score and description	90
Table 3.4.5a Population, Adaptive Capacity Score, Coastal Impact Areas	91
Table 3.4.5b Natural Resource based Production Areas, Adaptive Capacity Score, Coastal Impact Areas	92
Table 3.4.5c Urban Use Areas, Adaptive Capacity Score, Coastal Impact Areas	93
Table 3.4.5d Critical Point Facilities, Adaptive Capacity Score, Coastal Impact Areas	94
Table 3.4.5e Lifeline Utilities, Adaptive Capacity Score, Coastal Impact Areas	95
Table 3.4.6a Population Vulnerability Coastal Impact Areas	98
Table Table 3.4.6b Natural Resource based Production Areas Vulnerability Coastal Impact Areas	100
Table 3.4.6c Urban Use Areas Vulnerability Coastal Impact Areas	102
Table 3.4.6d Critical Points Facilities Vulnerability Coastal Impact Areas	105
Table 3.4.6e Lifeline Utilities Vulnerability Coastal Impact Areas	106
Table 3.4.7 Sample Climate Change Vulnerability Assessment Summary Matrix	107
Table 3.4.8 Disaster Thresholds and acceptability rating per exposure type	108
Table 3.4.9a Sample Climate Change Vulnerability Assessment Summary Matrix for Population, Sea Level Rise	109
Table 3.4.9b Sample Climate Change Vulnerability Assessment Summary Matrix for Natural Resource Production Areas, Sea Level Rise	110
Table 3.4.9c Sample Climate Change Vulnerability Assessment Summary Matrix for Urban Use Areas, Sea Level Rise	111
Table 3.4.9d Sample Climate Change Vulnerability Assessment Summary Matrix for Critical Point Facilities, Sea Level Rise	112
Table 3.4.9e Sample Climate Change Vulnerability Assessment Summary Matrix for Lifeline Utilities, Sea Level Rise	113
Table 3.5.1a Indicative Likelihood of Occurrence Scores	115
Table 3.5.1b Sample Flood Hazard Inventory, Municipality of Opol	115
Table 3.5.2a Population Exposure Estimation	118
Table 3.5.2b Sample Natural Resource Production Area Exposure Table	121
Table 3.5.2c Sample Urban Use Area Exposure Table, Barangay Barra, Municipality of Opol	124
Table 3.5.2d Critical Point Facilities Exposure to flood per Barangay, Municipality of Opol.	126
Table 3.5.2e Lifeline Utilities Exposure to flood, Municipality of Opol.	128
Table 3.5.3 Severity of Consequence Score Matrix	130
Table 3.5.3a Population Severity of Consequence Estimation, for Floods	132
Table 3.5.3b Natural Resource Production Area Severity of Consequence Estimation	133
Table 3.5.3c Sample Urban Use Area Severity of Consequence Estimation, Barangay Barra, Municipality of Opol	135
Table 3.5.3d Critical Point Facilities Severity of Consequence Estimation	136
Table 3.5.3e Lifeline Utilities Severity of Consequence Estimation	138
Table 3.5.4 Risk Score Matrix	140
Table 3.5.4a Population risk to flood, Municipality of Opol.	142
Table 3.5.4b Natural resource production area risk to flood, Municipality of Opol.	144

Table 3.5.4c Urban Use Area Risk to flood, Municipality of Opol.	146
Table 3.5.4d Critical Point Facilities Risk to flood, Municipality of Opol.	148
Table 3.5.4e Lifeline Utilities Risk to flood, Municipality of Opol.	150
Table 3.5.5a Sample Risk Disaster Risk Assessment Summary Matrix for Population, Flood	152
Table 3.5.5b Sample Disaster Risk Assessment Summary Matrix Natural Resource Production Areas, Floods	153
Table 3.5.5c Sample Disaster Risk Assessment Summary Matrix Urban Use Area, Floods	153
Table 3.5.5d Sample Disaster Risk Assessment Summary Matrix Critical Point Facilities, Floods	154
Table 3.5.5e Sample Disaster Risk Assessment Summary Matrix Lifeline Utilities	154
Table 3.5.6a Sample Issues Matrix for Population	157
Table 3.5.6b Sample Issues Matrix Natural Resource Production Areas	158
Table 3.5.6c Sample Issues Matrix Urban Use Areas	159
Table 3.5.6d Sample Issues Matrix Critical Point Facilities	160
Table 3.5.6e Sample Issues Matrix Lifeline Utilities, Flood Hazard	161
Table 3.6.1 Sample Issues Matrix Urban Use Areas	164
Table 4.1 Sample vision element descriptors and success indicators for disaster risk reduction and climate change adaptation	166
Table 4.2 Steps and expected outputs of the Climate and Disaster Risk Assessment	169
Table 4.3 Adjustments in housing requirements for 2022	171
Table 4.4. Area requirements for educational facilities for 2020	172
Table 4.5 Area requirements for Day Care Centers, 2022	173
Table 4.6 Adjustments in area requirements for Health related facilities	174
Table 4.7 Adjustments in area requirements for Urban Use Areas	175
Table 4.8 Sample summary of Risk Management Options for Natural Resource Production Areas	176
Table 4.9 Sample Risk Management Options for Priority Bridges	177
Table 4.10 Summary Risk Management Options for Road Network	178
Table 4.11 Suitability score and description	182
Table 4.12 Recommended suitability score and description1	183
Table 4.13 Risk and Vulnerability Information in the sectoral and cross sectoral analysis	186
Table 4.14 Risk and Vulnerability considerations in the sectoral and cross sectoral analysis, Social sector Housing Sub-sector	187
Table 4.15 Risk and Vulnerability considerations in the sectoral and cross sectoral analysis, Social Sector-Health Sub-sector	188
Table 4.16 Sample goals and objectives	190
Table 4.17 Sample Development Thrust evaluation	194
Table 4.18 Sample Spatial Strategy evaluation	197
Table 4.19 Sample Land Use Planning Options for Flood hazard areas	206
Table 4.20 Sample Priority Programs-Projects-Legislation	209
Table 4.21 Sample Zone Boundary Description, Flood Hazard Overlay Zone Map	214
Table 4.22 Sample Monitoring and Evaluation Indicators	220
Table A1. The four SRES scenarios developed by the Intergovernmental Panel on Climate Change (IPCC)	229
Table A2. Comparative Matrix of Application of Concept of Risk	232
Table A3. Thresholds for declaring a state of calamity	233

List of Figures

Figure 1.1. Identified Decision Areas, CDRA, Municipality of Opol, Misamis Oriental	4
Figure 1.2. Existing and Proposed Land Use Plan, Municipality of Opol, Misamis Oriental	5
Figure 2.1 Framework for Mainstreaming Climate and Disaster Risks in the Comprehensive Land Use Plan	7
Figure 2.2 Climate adjusted flood hazard maps of the Cagayan de Oro River System.	10
Figure 2.2a Land cover (2009) and projected temperature increase (2020) of Silago, Southern, Leyte	21
Figure 2.3 Sample Urban use area flood exposure mapping	27
Figure 2.4 Detailing of decision areas.	33
Figure 3.1.1 Sample Flood and Rain-Induced Landslide Hazard Map, MGB-Region 10, 2011	49
Figure 3.1.2 Flood susceptibility map of the Municipality of Opol, Misamis Oriental	50
Figure 3.2.1 Sample Climate Change Impact Chain Multiple Sectors	56
Figure 3.2.2 Sample Agriculture Sector Impact Chain	57
Figure 3.3.1 Sample Existing population exposure map, Municipality of Opol	60
Figure 3.3.2 Sample existing urban use areas exposure map, Municipality of Opol	62
Figure 3.3.3 Sample existing natural resource-based exposure map, Municipality of Opol	64
Figure 3.3.4 Sample existing Critical Point Facilities exposure map, Municipality of Opol	67
Figure 3.3.5 Sample existing lifeline utilities exposure map, Municipality of Opol	70
Figure 3.4.1 Sample Impact Area Map for Sea Level Rise, Municipality of Opol	73
Figure 3.4.2a Sample Population Exposure to Sea Level Rise, Municipality of Opol	74
Figure 3.4.2b Sample Natural resource based production area exposure map to Sea Level Rise, Municipality of Opol	76
Figure 3.4.2c Sample urban use area exposure map to Sea Level Rise, Municipality of Opol	78
Figure 3.4.2d Sample critical point facilities exposure map to Sea Level Rise, Municipality of Opol	80
Figure 3.4.2e Sample lifeline utilities exposure map to Sea Level Rise, Municipality of Opol	82
Figure 3.4.3a Sample Population vulnerability map to Sea Level Rise, Municipality of Opol	97
Figure 3.4.3b Sample Natural resource based production areas vulnerability map to Sea Level Rise, Municipality of Opol	99
Figure 3.4.3c Sample Urban Use Area vulnerability map to Sea Level Rise, Municipality of Opol	101
Figure 3.4.3d Sample Critical Point Facilities vulnerability map to Sea Level Rise, Municipality of Opol	103
Figure 3.4.3e Sample Lifeline Utilities vulnerability map to Sea Level Rise, Municipality of Opol	105
Figure 3.5.1a Sample population flood exposure mapping	117
Figure 3.5.1b Sample Natural resource based production area flood exposure mapping	120
Figure 3.5.1c Sample Urban use area flood exposure mapping	123
Figure 3.5.1d Sample Critical point facilities flood exposure mapping	125
Figure 3.5.1e Sample Lifeline Utilities flood exposure mapping	127
Figure 3.5.2a Risk to Population, Floods, Municipality of Opol	141
Figure 3.5.2b Risk to Natural resource based production areas, Floods, Municipality of Opol	143
Figure 3.5.2c Risk to Urban use areas, Floods, Municipality of Opol	145
Figure 3.5.2d Risk to Critical Point Facilities, Floods, Municipality of Opol	147
Figure 3.5.2e Risk to Lifeline Utilities. Floods, Municipality of Opol	149

Figure 3.6.1. Detailing of decision areas.	163
Figure 4.1. Mainstreaming Climate and Disaster Risks in the CLUP (Steps 3-5)	168
Figure 4.2 Land Demand and Supply Analysis, incorporating results of the Climate and Disaster Risk Assessment	181
Figure 4.2a. Sample Sieve Mapping and Suitability Analysis	184
Figure 4.3 Mainstreaming Climate and Disaster Risks in the CLUP (Steps 3-5)	189
Figure 4.4 Sample Spatial Strategy Option	199
Figure 4.5 Sample Flood Hazard Overlay Map, Barangay Barra, Municipality of Opol, Misamis Oriental	213
Figure A1. Scenarios for GHG emissions from 2000 to 2100 and projections of surface temperatures	230
Figure A2. Correspondence of the IPCC Vulnerability and UN Risk Frameworks	235

Acronyms

AIP Annual Investment Plan
APAs Areas for Priority Action

AusAid Australian Aid

BAS Bureau of Agricultural Statistics

C/MPDC City/Municipal Planning and Development Council
C/MPDO City/Municipal Planning and Development Office

CCA Climate Change Adaptation
CCC Climate Change Commission

CCVA Climate Change Vulnerability Assessment

CDP Comprehensive Development Plan
CDRA Climate and Disaster Risk Assessment

CLUP Comprehensive Land Use Plan

DA Department of Agriculture

DEM Digital Elevation Model

DENR Department of Environmental and Natural Resource

DFAT Department of Foreign Affairs and Trade

DILG Department of Interior and Local Government
DPWH Department of Public Works and Highways

DRA Disaster Risk Assessment
DRR Disaster Risk Reduction

DRRM Disaster Risk Reduction and Management ECC Environmental Compliance Certificate

ECHO European Commission Humanitarian Office

EIS Environmental Impact Statement

EWS Early Warning System FAR Floor Area Ratio

GHG Greenhouse Gases

GIS Geographic Information System

GPS Global Positioning System

HLURB Housing and Land Use Regulatory Board

IPCC Intergovernmental Panel on Climate Change

LCCAP Local Climate Change Action Plan

LDIP Local Development Investment Program

LDRRMP Local Disaster Risk Reduction and Management Plan

LGU Local Government Unit

MAPSO Maximum Allowable Percentage of Site Occupancy

MGB Mines and Geosciences Bureau

NBCP National Building Code of the Philippines

NDCC National Disaster Coordinating Council

NDRRMC National Disaster Risk Reduction and Management Council

NEDA National Economic Development Authority

NSCP National Structural Code of the Philippines

OCD Office of Civil Defense

PAGASA Philippine Atmospheric, Geophysical and Astronomical Services Administration

PDPFP Provincial Development and Physical Framework Plan

PHIVOLCS Philippine Institute of Volcanology and Seismology

PRECIS Providing Regional Climates for Impact Studies

RAP Risk Analysis Project

RCPs Representative Concentration Pathways

READY Hazards Mapping and Assessment for Effective Community-Based Disaster Risk Management Project

REDAS Rapid Earthquake Damage Assessment System

RIDF Rainfall Intensity Duration Frequency
RPFP Regional Physical Framework Plan

TWG Technical Working Group

UNDP United Nations Development Programme

UNISDR United Nations International Strategy for Disaster Reduction

UTM Universal Transverse Mercator
WGS84 World Geodetic System of 1984

ZO Zoning Ordinance

Executive Summary


The Supplemental Guidelines on Mainstreaming Climate and Disaster Risks in the Comprehensive land use plan will help local governments formulate climate and disaster risk-sensitive comprehensive land use plans and zoning ordinances that would guide the allocation and regulation of land use so that exposure and vulnerability of population, infrastructure, economic activities and the environment to natural hazards and climate change can be minimized or even prevented. The resulting improvements in land use planning and zoning processes will strengthen the ability of local governments to achieve their sustainable development objectives given the challenges posed by climate change and natural hazards.

The Housing and Land Use Regulatory Board (HLURB) partnered with the Climate Change Commission (CCC), United Nations Development Program (UNDP) and the Australian Aid Program (AusAid), under Project Climate Twin Phoenix in the formulation of the Supplemental Guidelines on Mainstreaming Climate and Disaster Risks in the Comprehensive Land Use Plan. The supplemental guidelines is a product of consultations with HLURB and other National Government Agencies (NGAs); and the piloting in the Municipality of Opol, Misamis Oriental.

The Comprehensive Land Use Plan is an effective disaster risk reduction instrument which may at the same time result in climate change adaptation. It seeks to rationalize the allocation of land uses to reduce exposure of people, assets and economic activities; address vulnerabilities by providing safer places to live, sustain livelihood and ensure optimum productivity of natural resources through ecosystem-based management. Also, land use planning is a cost-effective and proactive approach in managing current and future risks considering the high costs of structural measures to address unplanned spatial development. Land use planning can also reduce hazard magnitudes by including ecosystem management approaches, such as rehabilitation of watersheds to minimize lowland flooding. Lastly, it serves as a framework to guide in the preparation of local level plans (CDP, LDIP, AIP, LDRRMP) to implement its DRR-CCA development agenda.

The Climate and Disaster Risk Assessment (CDRA) is the process of studying risks and vulnerabilities of exposed elements namely, the people, urban areas, agriculture, forestry and fishery production areas, critical point facilities, and lifeline infrastructure associated with natural hazards and climate change. It seeks to establish risk and vulnerable areas by analyzing the hazard, exposure, vulnerability/sensitivity and adaptive capacities of the various exposed elements. The CDRA identifies the priority decision areas that needs to be addressed given the acceptable or tolerable levels of risks and allow the identification of various disaster risk and climate change adaptation and mitigation measures and spatial policy interventions.

The CDRA generates planning information to provide a better understanding of the existing situation on risks and vulnerabilities to natural hazards and climate change to enable planners and decision makers to come up with informed decisions during the CLUP formulation process as shown in the mainstreaming framework.

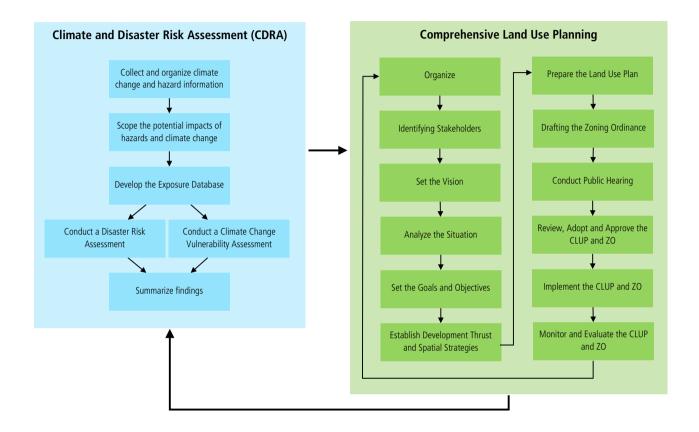

Introduction

1

The Climate Change Commission (CCC) and the Housing and Land Use Regulatory Board (HLURB) formulated these Supplemental Guidelines as an annex to to the 2014 Comprehensive Land Use Plan Guidebooks of HLURB. Local governments shall refer to the Supplemental Guidelines in the preparation of their risk-sensitive land use plans.

The Supplemental Guidelines provide a step-by-step process to assess climate and disaster risks of a locality. Risk information coming from this analysis will form part of the basis for the optimum allocation of land to various uses, taking into account the locational and sectoral constraints posed by natural hazards and the potential impacts of climate change.

This introductory chapter provides the rationale for mainstreaming climate and disaster risks in comprehensive land use planning. It discusses the enabling environment for mainstreaming DRR-CCA in local level planning and provides the benefits of a risk- sensitive CLUP as an instrument in promoting sustainable development. !

Policy Context

The 2009 Climate Change Act and the 2010 National Disaster Risk Reduction and Management Law provide the fundamental frameworks for key actions toward improving governance and participation, financing, capacity development and addressing critical hazard challenges, specifically those which are becoming more frequent and intense due to climate change.

The National Climate Change Action Plan and the National Disaster Risk Reduction and Management Plan have been adopted to define priority areas for interventions toward achieving reduction in climate and disaster risks and adaptation to climate change. At the subnational level, Local Disaster Risk Reduction and Management Plans are prepared to define local agenda for preparedness, prevention and mitigation, response, and recovery and rehabilitation. Local climate change action plans, on the other hand, are subsumed in climate and disaster risk sensitive comprehensive development and land use plans.

These plans recognize the need for a more balanced and systematic approach that puts forward the importance and value of properly assessing and managing climate and disaster risk before disasters happen. Thus, a lot of effort is now being pursued in understanding hazards, risks, and vulnerabilities of population, assets and the environment; and in factoring in climate and disaster risk assessment information into national planning. Investment and development decisions.

The convergence of disaster risk reduction and climate change adaptation are likewise being pursued given their similar goal of sustainable development. These Supplemental Guidelines are meant to mainstream both disaster risk reduction and climate change adaptation into the comprehensive land use plan to ensure policy coherence and effective use of resources.

Rationale

The Philippines is one among the most hazard prone countries in the world. Millions of individuals are affected annually by disasters caused by natural hazards. Economic losses are high eroding growth prospects of the country.

Climate change will increase the vulnerability of communities due to potential impacts on agricultural productivity, food supply, water availability, health and coastal and forest ecosystem degradation. These environmental impacts lead to loss of income and livelihood, increased poverty and reduced a quality of life. These impacts will significantly delay development processes.

Comprehensive land use planning puts into practice the essence of local autonomy among Local Government Units ¹ (LGUs) and enable them to formulate development goals, objectives, spatial design alternatives and arrive at sound and socially acceptable spatial based policies, strategies, programs and projects. The process rationalizes the location, allocation and use of land based on social, economic, physical, and political/institutional requirements and physical/environmental constraints and opportunities. It provides the basis for the effective regulation of land and its resources and rationalized allocation of public and private investments

The CLUP is therefore an integral instrument for local government units to effectively address existing risks, and avoid the creation of new risks to people, assets and economic activities by rationalizing distribution and development of settlements, and the utilization and management of natural resources. In the context of disaster risk reduction and management, land use planning is a proactive approach, which emphasizes on predisaster prevention and mitigation. Through anticipatory interventions, it is expected that population are safer, the economy more resilient, and basic services and infrastructure are robust. In the process, substantially reducing resources for disaster response and post disaster recovery and rehabilitation.

Through the CLUP, risks and vulnerabilities can be assessed in detail at the city/municipal and barangay levels; national and sub-national DRR-CCA strategic priorities can be localized and integrated in the land use plan; development and use of properties, structures and resources at the parcel level can be regulated through zoning; local governments can identify and implement local legislations to support land use policies related to the reduction of risks and vulnerabilities; and local stakeholders can be engaged to identify socially acceptable policy and program interventions in addressing DRR-CCA related concerns and issues.

Benefits of mainstreaming

Climate and disaster risk assessment provides LGUs the necessary planning information to supplement the CLUP planning process. The climate and disaster risk assessment, seeks to establish a deeper understanding of natural hazards (frequency of occurrence and magnitude) and climate change impacts that may affect the local territory, the vulnerabilities of the various exposed elements, the magnitude of risks involved in order to identify the pressing development challenges, problems, issues and concerns so the proper interventions for mitigation and adaption can be translated into the various aspects of the CLUP. Understanding the potential risks and the vulnerabilities allow decision- makers and stakeholders make informed and meaningful decisions in goal formulation, strategy generation and land use policy formulation and development. The integration of climate and disaster risks in the CLUP and ZO formulation will allow local government units to:

• Better understand natural hazards and climate change and how these would likely alter the development path of the locality;

¹ HLURB, CLUP Guidebook, Volume 1, p.2, 2006 HLURB-CCC-UNDP-AusAid | PROJECT CLIMATE TWIN PHOENIX

- Understand risks posed by natural hazards and climate change on exposed areas, sectors and communities by analyzing exposure, vulnerabilities, and adaptive capacities;
- Identify priority decision areas and development challenges posed by climate change and natural hazards;
- Determine realistic projections on demand and supply of land for settlements, production, protection, and infrastructure development given the impacts of climate change and natural hazards, and existing risks and vulnerabilities;
- Incorporate spatial development goals, objectives and targets to reduce risks and vulnerabilities;
- Make informed decisions to effectively address risks and vulnerabilities by weighing alternative spatial strategies, land use allocation, and zoning regulations;
- Identify appropriate risk reduction and climate change adaptation and mitigation measures as inputs to the comprehensive development planning and investment programming.

Interventions without considering the potential threats of natural hazards and climate change may lead to creation of new risks and maladaptation. Increasing population and demand for land coupled with the improper location and development of settlement zones and the unsustainable utilization and management of natural resources may generate new risks by exposing vulnerable elements in hazard prone areas. Interventions that address historical frequencies and intensities of hazards may inadequately address current risks and provide a false sense of security to its inhabitants.

Features of the Guidelines

- 1. Supports the updated CLUP Guidebook The HLURB, in collaboration with the Deutsche Gesellschaft für Internationale Zusammenarbeit (GIZ) GmbH, updated and approved the three volume CLUP guidebooks in 2014 to provide support to local government units in formulating their comprehensive land use plans to address new planning challenges. The said guidebooks integrated additional thematic planning concerns such as biodiversity, heritage, ancestral domain, green growth, and disaster risk reduction and climate change adaptation in the land use planning process. The supplemental guidelines, serves as companion resource book to the three volume guidebooks and provides added concepts and tools on climate and disaster risk assessment to generate additional planning information and recommendations on how to integrate the results in the 12 step CLUP formulation process which covers situational analysis, goal and objective setting, development thrust and spatial strategy generation, and use policy development and zoning. Risk information from the Supplemental! Guidelines shall be useful for deepening the thematic analysis of the Guidebooks.
- 2. Introduces a conceptual Climate and Disaster Risk Assessment (CDRA) process The Supplemental Guidelines introduce a six-step CDRA process to analyze risks and vulnerabilities of exposed elements namely, people, urban areas, agriculture, forestry and fishery production areas, critical point facilities, lifelines and other infrastructure that are associated with natural hazards and climate change. It seeks to establish risk and vulnerable areas by analyzing the underlying factors on hazard, exposure, vulnerability/ sensitivity, and adaptive capacities. The CDRA facilitates the identification of priority decision areas and allow the identification of various disaster risk reduction and climate change adaptation measures in the form of land use policy interventions (i.e. land use policies, zoning provisions, support legislation, programs and projects) to address current and prevent future risks and vulnerabilities.
- **3. Operationalizes the CDRA process and integration of the results in the CLUP** The preparation of the Supplemental Guidelines benefited from the pilot-testing in the Municipality of Opol, Misamis Oriental where the CDRA and the integration of the results were demonstrated. This will provide Local Government Units (LGUs) a guide on how to conduct a CDRA and how the results can be integrated in

CLUP formulation. The combined assessments on disaster risks and climate change vulnerability done in the said municipality revealed priority decision areas which shall be the focus of land use and sectoral planning and analysis. Figure 1.1 below shows the five decision areas in Opol which have been sieved from the analysis of the geographic extent of flood and the exposed population, structures, and economic activities; as well as from the assessment of vulnerability to sea level rise and other climate change stimulus (i.e. changes in rainfall patterns, temperature and extreme weather events).

Major highlights include the identification of coastal and riverine settlements considered highly at risk to flooding due to the poor quality of structures, while the fishpond areas are moderately at risk given their location, fish cage design and current production practices. Also, transport or circulation systems are also considered at risk and may cause a significant disruption on the flow of people and goods in the event of floods. Some portions of the coastal areas of Brgys. Bonbon, Poblacion and Igpit areas are projected to be permanently inundated due to changes in sea levels and most of the structures in the area are not designed to withstand coastal flooding and storm surges. A significant portion of the low-income population relies on tourism for their means of livelihood, which is expected to be disrupted by coastal flooding. If left unaddressed, damage to structures and possible deaths and injuries may be expected during floods and storm surges.

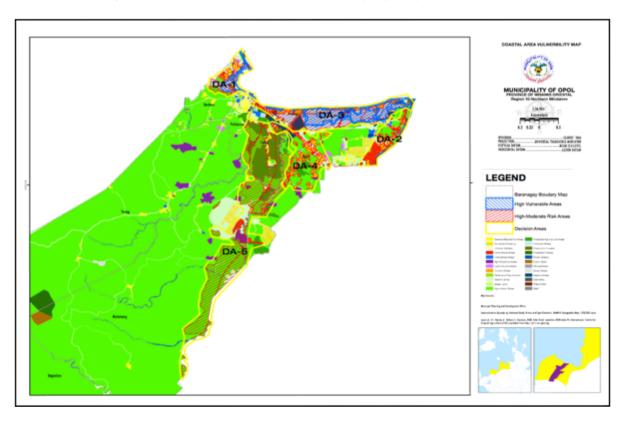


Figure 1.1. Identified Decision Areas, CDRA, Municipality of Opol, Misamis Oriental

Considering the five priority decision areas identified in the climate and disaster risk assessment, the Municipality of Opol identified the following general land use policy policy directions (refer to Figure 1.2):

- Redirecting residential type uses to higher grounds to manage property and population exposure to sea-level rise, coastal, and riverine flooding;
- Limiting land uses in the coastal areas into non-residential uses mainly tourism, commercial and industrial type uses where regulations on hazard resistant design shall be imposed to property developers;

- Establishing two commercial growth nodes (Brgy. Barra and Brgy. Poblacion) to ensure redundancies in the provision of commercial based services;
- Establishing easements areas, green belts and open space uses along the coast, and rivers;
- Establishingcropproductionareassupportinfrastructuresuchasirrigationandwater impoundment and changing crop production practices to adapt to projected changes in rainfall patterns;
- Rehabilitation and protection of upland forests and watersheds to manage local surface and potable water supplies, and control surface water run-off that would contribute to low-land flooding along the Iponan and Bungcalalan Rivers; and
- Establishing redundant transportation systems further upland that would run parallel to the existing coastal national roads to ensure continued access to major growth nodes;

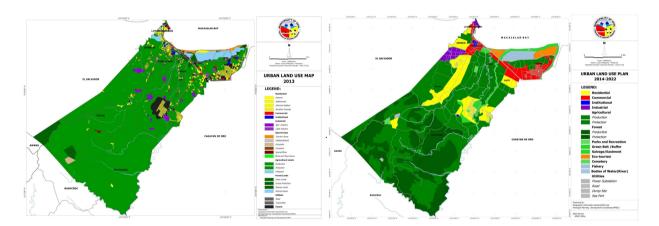


Figure 1.2. Existing and Proposed Land Use Plan, Municipality of Opol, Misamis Oriental

- **4. Covers the formulation of zoning parameters to operationalize the land use plan -** he Supplemental Guidelines illustrate how LGUs can translate land use policies on disaster risk reduction and climate change adaptation into zoning parameters to effectively address risks through managing exposure and encouraging resilient structures to ensure the safety of the population and limit structural damages caused by hazards. These include:
 - Hazard resistant building design provisions hazard specific building design regulations to minimize structural damage, damage to building contents and minimize potential casualties using important referral codes such as the National Building Code of the Philippines (NBCP) and National Structural Code of the Philippines (NSCP);
 - Bulk and Density Control density control measures/regulations as an exposure management approach to control the number of elements exposed to the hazard by controlling the Gross floor area, building height, and minimum lot sizes.
 - Permitted Uses list of uses allowed within the hazard overlay zone and identifying critical facilities (i.e. schools, hospitals, government buildings, power/ water distribution support facilities) which will be allowed depending on intensity of the hazard to ensure that minimal disruption on vital facilities during and after a hazard occurrence;

• Added regulations — covering incentives/disincentives (i.e. real property tax discounts, required property insurance or period given to property owners to employ structural retrofitting) to encourage property owners to implement risk mitigation measures.

Structure of the Guidelines

After this introductory chapter, Chapter 2 discusses the two major components of the mainstreaming framework- the climate and disaster risk assessment (CDRA) and integration of results into the CLUP. The theoretical aspects are discussed to gain a better understanding on the how to's of the six-step climate and disaster risk assessment process and to identify the entry points for integrating the results of the assessment in the 12-step CLUP formulation process.

Chapter 3 operationalizes the CDRA approach by demonstrating how each step is done using the pilot testing results in the Municipality of Opol. It outlines the procedures for: gathering climate and hazard information; scoping of impacts of climate change and hazards on areas, sectors or human and natural systems; enumerating various indicators for establishing exposure, sensitivity/vulnerability, and adaptive capacity for population, urban use areas, natural-resource-based production areas, and critical point and lifeline facilities; assessing and mapping vulnerability and risks; establishing priority decision areas; identifying sectoral development issues and concerns in terms of climate change and natural hazards; and enumerating policy options/interventions with emphasis on the identification of risk management options.

Chapter 4 illustrates how the results of the CDRA are integrated in the various steps of the CLUP formulation. Analytical results of the CDRA are used in risk-sensitive development thrust and spatial strategy evaluation and selection, land use policy formulation, zoning regulations, program and project identification, and monitoring and evaluation. The annex presents the fundamental concepts of climate change in the context of the Philippines and the concept of risk and vulnerability in the context of Disaster Risk Reduction and Climate Change Adaptation.

Mainstreaming Framework

2

Mainstreaming climate and disaster risks in the Comprehensive Land Use Plan

The framework for mainstreaming climate and disaster risks illustrates how the CDRA is undertaken and how the results of the assessment are integrated to enhance the various aspects of the CLUP formulation process such as visioning, goal and strategy generation, land use policy development/zoning, and identification of the appropriate programs, projects and activities (PPAs) to support climate change adaptation and disaster risk reduction.

The mainstreaming framework involves two processes: first, the conduct of climate and disaster risk assessment; and second, the mainstreaming of results of the CDRA in the various steps of the CLUP formulation process. The outputs derived from the climate and disaster risk assessment facilitates the identification of major decision areas which are characterized as areas at risk to natural hazards which can be exacerbated by vulnerabilities to climate change impacts, including the necessary interventions to address them in the form of disaster risk reduction (DRR) and climate change adaptation (CCA) options.

The integration of the results of the CDRA intends to guide the formulation of a risk-sensitive comprehensive land use plan towards a safer and resilient human settlements through rationalized location of people, assets, economic activities, and sustainable management of resources to effectively reduce and manage climate and disaster risks.

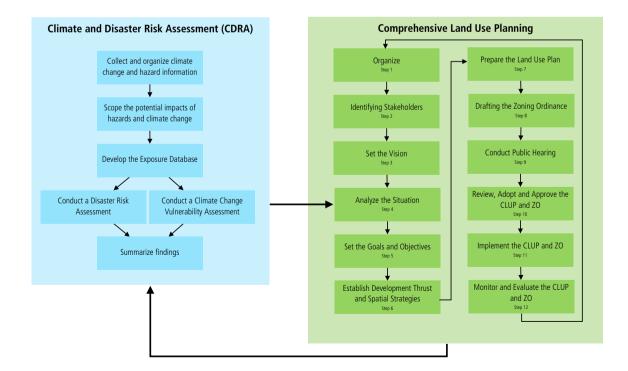


Figure 2.1 Framework for Mainstreaming Climate and Disaster Risks in the Comprehensive Land Use Plan

Climate and Disaster Risk Assessment (CDRA) Process

The climate and disaster risk assessment (CDRA) intends to determine the level of risks and vulnerabilities of areas and sectors in the municipality/city to climate related hazards and potential impacts of climate change and facilitate the identification of priority decision areas where the various interventions can be implemented. The CDRA involves 6 steps namely:

- 1. **Collect and organize climate change and hazard information** involves the gathering of climate change information and characterizing hazards that may affect the locality.
- 2. Scope the potential impacts of hazards and climate change identifying key areas or sectors that may be affected by climate change and natural hazards and determining likely impacts (direct and indirect);
- 3. **Develop the exposure database** gathering baseline map and attribute data on exposure, vulnerability/ sensitivity and adaptive capacity as basis for the Climate Change Vulnerability Assessment (CCVA) and Disaster Risk Assessment (DRA).
- 4. **Conduct a CCVA** identification of vulnerable areas and sectors by analysing exposure, sensitivity and adaptive capacity to the various climate stimuli.
- 5. **Conduct a DRA** identification of risk areas by analyzing hazard, exposure and vulnerability.
- 6. **Summarize findings** identification of priority decision areas/sectors based on the combined level of risks and vulnerabilities, identification of risk management options, climate change adaptation and mitigation options.

Step 1. Collect and organize climate change and hazard information

The Climate Change in the Philippines published by PAGASA in February 2011 is the basic source of the climate change information for local government units. The said report contains the projections for 2020 and 2050 under the high, medium, and low emission scenarios. Boxes 1 and 2 show the methodology and trends of these projections, respectively.

Box 1. Climate Change Projections in the Philippines: Methodology

PAGASA used three climate scenarios (high, medium and low range scenarios). The medium-range emission scenario which indicates "a future world of very rapid economic growth, with the global population peaking in mid-century and declining thereafter and there is rapid introduction of new and more efficient technologies with energy generation balanced across all sources" (PAGASA: 2011) is proposed to be used for the climate and disaster risk assessment since it considers past emissions.

The projected changes are relative to the baseline (1971-2000) climate, the years where actual observed data has been established for the Philippines. Two time slices centered on 2020 (2006-2035) and 2050 (2036-2065) were used in the climate simulations.

The main outputs of the simulations are: (a) projected changes in seasonal and annual mean temperatures; (b) projected changes in minimum and maximum temperatures; (c) projected changes in seasonal rainfall; and (d) projected frequency of extreme events.

The seasonal variations are as follows (a) the DJF (December, January, February or northeast monsoon locally known as "amihan") season; (b) the MAM (March, April, May or summer) season; (c) JJA (June, July, August or southwest monsoon locally known as "habagat") season; and (d) SON (September, October, November or transition from southwest to northeast monsoon) season.

On the other hand, the extreme events are defined as follows:

- Extreme temperature (assessed as number of days with maximum temperature greater than 350C, following the threshold values used in other countries in the Asia-Pacific region);
- Dry days (assessed as number of dry days or days with rainfall equal or less than 2.5 mm/day), following the World Meteorological Organization standard definition of dry days used in a a number of countries); and
- Extreme rainfall (assessed as number of days with daily rainfall greater than 300 mm, which for wet tropical areas, like the Philippines, is considerably intense that could trigger disastrous events).

Source: PAGASA. 2011. In partnership with UN-GOP-MDGF Project. Climate Change in the Philippines. Quezon City, Philippines

LGUs can derive provincial level climate change projections from the Climate Change in the Philippines published by PAGASA. It contains climate variables on the baseline period from 1971-2000 and the projected changes from the baseline values for two time frames, 2020 and 2050 covering seasonal rainfall change, seasonal temperature change, frequency of extreme rainfall events, frequency of days with temperatures exceeding 35°C, and frequency of dry days or days with rainfall less than 2.5mm (refer to Table 2.1)

Table 2.1 Climate Change Projections for Misamis Oriental, Region 10

Climate Variables	Observe	ed Basel	ine (197	1-2000)	Chang	je in 202	0 (2006	-2035)	Chang	je in 205	0 (2036	-2065)
Seasons	DJF	MAM	JJA	SON	DJF	MAM	JJA	SON	DJF	MAM	JJA	SON
Seasonal temperature increases (°C)	25.4	26.8	26.9	26.5	1.0	1.2	1.2	1.0	1.9	2.3	3.4	2.0
Seasonal rainfall change (%)	442.5	296.0	615.7	581.1	4.6	-10.4	-3.7	2.9	1.8	-17.8	-5.2	-0.1
No of days with Temp >35°C	382				4,539				6,180			
No. of dry days (rainfall < 2.5mm)	8,251			6413			7,060					
No of days with Extreme Rainfall > 150mm	10			13			9					

Seasons DJF - December, January and February, MAM- March, April, and May, JJA - June, July, and August, SON - September, October and November Projections are based under medium-range emission scenario (A1B)

Source: DOST-PAGASA. Climate Change in the Philippines. 2011 (Under the UN-Philippine MDG F Project in partnership with Adaptayo).

This step will result in a summary of climate change information available to the local government units. This is not limited to climate type but more importantly information on projected changes in climate variables such as temperature, precipitation, and extreme events for specific future time horizon (e.g., 2020 or 2050). These will help establish if the LGU will be potentially affected by climate change, or if there are already indications that climate change is already happening.

Hazard information covers the characterization of the potential hazards affecting the locality and historical data on past disaster damage data to indicate what sectors/elements that are adversely affected by hazards. Information on hazards can be gathered from the various national and local level agencies. Hazards can be described in terms of frequency, spatial extent, magnitude/intensity, duration, predictability, and speed of onset.

Another important concept which this guideline would like to emphasize is that a changing climate may impact the frequency and severity of hazards such as floods, landslides (due to changes in one day extreme rainfall patterns), and storm surges (due to sea level rise and potential changes in the frequency, severity and path of tropical cyclones). A demonstration of integrating climate change in flood hazard mapping was conducted in the cities of Iligan and Cagayan de Oro, incorporating the potential changes in the frequency of extreme one day rainfall events in flood modeling, and the resulting effect on flood depths and spatial extent (refer to Figure 2.2). Using climate adjusted hazard maps as inputs to risk assessment may result in higher estimated damages due to the potential changes in the intensity of hazard and higher estimated risks due to potential changes in the projected frequency.

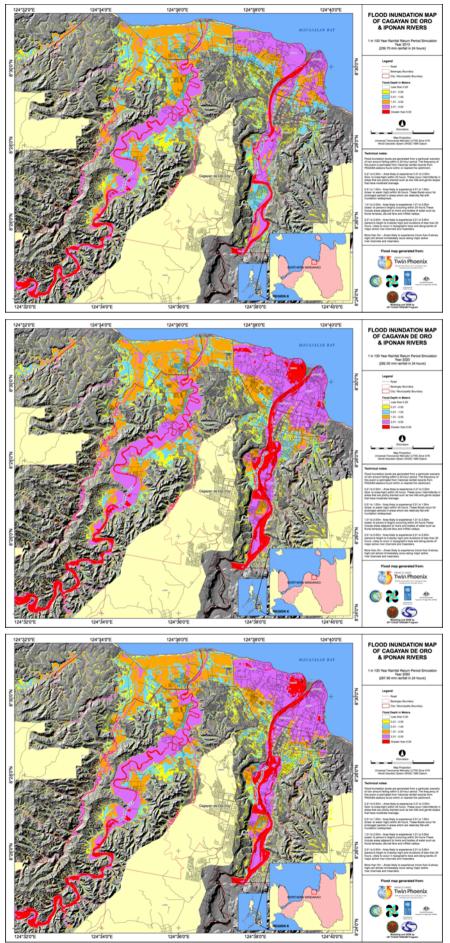


Figure 2.2 Climate adjusted flood hazard maps of the Cagayan de Oro River System.

A comparison of the estimated flood heights using a 1 in 100 year rainfall return period for 2013 (239.70mm) and climate change scenarios 2020 (282.00mm) and 2050 (267.00mm) for the Cagayan de Oro River System. It illustrates potential increase in flood heights and extent for projection years 2020 and 2050 compared to observed/historical 100 year rainfall.

Step 2. Scope the potential impacts of climate hazards and climate change on the LGU

This step summarizes the initial scoping of potential hazards, including the associated impacts of climate change, affecting the locality. These are based from the significant findings from the your initial scoping of climate trends, climate change, and compilation of hazard maps. This involves the identification of the various climate stimuli, derived from climate trends, climate change projections and hazards that will likely affect the municipality and the generation of impact chains to identify the possible direct and indirect that may likely affect the various development sectors.

Table 2.2 Summary of Climate change variables

	Table 2.2	Summary of Chinate Change varia	ubies
Climate change variables	Changes in variables	Climate Change Effects	Climate Change Impacts
Temperature	Increase	Longer period of droughts	Decline in crop production
remperature	Decrease	More warm days and nights	Heat-related stresses on health
Seasonal Rainfall	Increase	Frequent flooding	Damage to agricultural crops
	Decrease	Drought	Decline in water supply, decline in crop production
Climate extremes	More days with extreme rainfall amount	Potential changes in frequency and severity of flooding events; Potential changes in frequency in rain induced landslide events;	Property damage, deaths
Sea level	Increase	Permanent sea water inundation of inland areas Stronger storm surge resulting in coastal flooding	Loss of low lying/coastal land areas, Damaged property to low-lying coastal settlements

Table 2.3 Summary of Climate change effects and impacts

		anmade)											
Climate Change Impacts	(5)	Increased erosion or damage to coastal infrastructure, beaches, and other natural features Loss of coastal wetlands and other coastal habitats such as mangroves Coral bleaching Pollution Increased costs for maintenance and expansion of coastal erosion/flooding control (natural or manmade) Saltwater intrusion into coastal aquifers Submergence of low-lying lands Loss of cultural and historical sites on coastline to sea level rise	More heat-related stress, particularly among the elderly, the poor, and vulnerable population Increase in vector-borne diseases	Crops submerged in water Wilting in planted crops Changes in crop yields Diminishing harvest; reduction in farmers' income Increase risk of pest outbreaks and weeds Damaged road transportation network	Increased demand for irrigation due to longer and warmer growing season Unable to plant especially in times when rains are too little Poorer quality agricultural products (e.g., less grain filling in rice, smaller coconut fruits)	Intrusion of salt water into ricelands Reduced areas for rice production Reduction in farmers' income Reduced food supply	Less fish catch; less fish variety in fish catch Reduction in fishermen's income	Overflowing of fish cages resulting to less fish catch Reduction in fishermen's income	Increased competition for water (irrigation and hydropower) Changes in water quality	Changes in water quality	More travel disruptions associated with landslides and flooding Damage to flood control facilities	Impacts on business infrastructure located in floodplains or coastal areas Increased insurance premiums due to more extreme weather events	
		• • • • • • •	• •	• • • • •	• • •	• • • •	• •	• •	• •	•	• •	• •	
Climate Change Effects	(4)	Flooding Storm surge	Hotter days Flooding	Drought Flooding Rain-induced landslides	Drought	Flooding		Storm surge Sea level rise	Drought	Flooding	Flooding Rain-induced Iandslide	Flooding	
		• •	• •	• • •	•	•		• •	•	•	• •	•	
General Changes in the Climate Variable	(3)	Increase	Increase	Erratic rain patterns Too little rainfall Too much rains Early onset of rainy season Late onset of rainy season Too little rainfall	Increase	Increase	Increase (sea surface)	Increase (sea level)	decrease	More events	More events	More events	Increase
Climate Variable	(2)	Sea level rise	Temperature Rainfall	Rainfall	Temperature	Sea level	Temperature	Sea level	Rainfall	Extreme rainfall	Extreme rainfall	Extreme rainfall	Rainfall
Systems	(E)	Coastal zone	Human Health	Agriculture: crop production			Fishery production		Water Resources		Infrastructure: roads and bridges; flood control networks	Business	

Step 3. Exposure Database Development

The Exposure Database provides the baseline information pertaining to the elements at risk. It shall provide the location, vulnerability/sensitivity and adaptive capacity attributes of the exposed elements which are necessary information when conducting a climate change vulnerability assessment (CCVA) and disaster risk assessment (CDRA). Ideally, the exposure database should be mapped, indicating the approximate field location of the various elements which will be the basis in estimating the exposed elements expressed in terms of area, number and/or unit cost. Other area-/element-based information should also be gathered to establish the sensitivity/vulnerability and adaptive capacity of the exposed elements which will be the basis for estimating the level of risks and vulnerabilities.

Sample indicators can be gathered through primary field surveys or available secondary data (i.e CBMS, NSO, Barangay Profiles, Building Inventory, etc). The various information can be used to describe the extent of exposure (i.e. number of people, area, and unique structures), while the vulnerability/sensitivity and adaptive capacity indicators will be used in determining the severity of impacts. In this guideline, exposure units will be limited to:

- 1. **Population Exposure** shall indicate the spatial location and number of potentially affected persons. Spatial location can be derived from the existing residential area map. It shall also contain the demographic characteristics of local inhabitants which would be used to indicate whether they will be severely affected by hazards or impacts of climate change by analyzing information on the sensitivity/vulnerability and adaptive capacity. Suggested indicators for population exposure presented in Table 2.4.
- 2. **Urban use area Exposure** pertain to the built environment currently utilized for residential, commercial, industrial, tourism, sanitary waste management facilities, cemeteries, and other land uses unique to the locality. These are often represented as area/zone in the existing/proposed general or urban land use maps. The exposure information can be expressed in terms of area (in hectares or sq. meters), type of use, and replacement/construction cost (estimated replacement cost per sq meter).

Sensitivity/vulnerability attributes can be expressed as proportion and will be limited to the general structural/design attributes of the various structures located in the area such as type of wall construction materials, structural condition, building age, property insurance coverage to indicate its resiliency to the potential impacts of hazards and climate change. Suggested indicators for Urban Use Area exposure presented in Table 2.5.

Note that critical point facilities (i.e. hospitals, schools, day care centers, churches, power, water and communication related point facilities) which are located in institutional and infrastructure related land uses will be considered as separate exposure units.

3. **Natural resource based production areas** - pertain to areas utilized for crop, fisheries, and forest related production. Exposure can be expressed in terms of type of resource (i.e. rice, corn, fish, timber or non-timber forest resource), area in terms of hectares and replacement cost (cost of replanting for crops or restocking for fisheries).

Sensitivity/vulnerability and adaptive indicators pertain to current production practices (with emphasis on use of hazard resistant varieties and/or climate adapted production techniques), access to infrastructure (i.e. irrigation, water impoundment, flood control) and climate/hazard information, presence or use of risk transfer instruments and access to extension services. Suggested natural resource based production area exposure presented in Table 2.6.

Table 2.4 Recommended Population Exposure, Sensitivity/Vulnerability and Adaptive Capacity Indicators

Indicator	Description
Exposure	
Residential area	Residential area allocation per baranagay in hectares
Barangay population	Barangay population
Barangay Population Density	Population density of the barangay derived by dividing the total barangay population with the estimated residential land area.
Sensitivity/Vulnerability	
Wall construction materials	Proportion of households living in dwelling units with walls made from predominantly light, salvaged and makeshift type materials.
Dependent population	Proportion of young (<5 years Old) and old (Above 65)
Persons with Disabilities	Number/Proportion of population with disabilities
Early Waring System	Absence of early warning systems
Informal settler households	Proportion of informal settler households
Local awareness	Proportion of households/property owners not aware of natural hazards and impacts of climate change.
Access to infrastructure related mitigation measures	% of areas with no access to infrastructure related mitigation measures (i.e. sea walls, flood control measures)
Employment	Proportion of the labor force who are unemployed
Income below poverty threshold	Households with income below the poverty threshold
Education/literacy rate	Proportion of population with primary level educational attainment and below / Proportion of the population who are illiterate
Adaptive Capacity	
Access to financial assistance	Proportion of individuals with access to financial assistance (i.e. Pag-lbig, SSS, PhilHealth, Credit Cooperatives, Micro-financing institutions, Property and life insurance)
Access to information	Proportion of households with access to climate, climate change and hazards related information affecting the area
Capacity and willingness to retrofit or relocate	Proportion of households willing and have existing capacities to retrofit or relocate
Government investments	Local government capacity to invest in risk management and CC adaptation/mitigation

Table 2.5 Recommended Urban Use Area Exposure, Sensitivity/Vulnerability and Adaptive Capacity Indicators

Indicator	Description	
Exposure		
Category	The general classification or use of the area aggregated at the barangay level (residential, commercial, industrial)	
Total Barangay Area Allocation per land use category	Total area allocation in hectares per land use category at the barangay level	
Construction/replacement cost	Average construction/replacement cost per sq. meter per classification	
Assessed value	Estimated assessed value of the property (if available)	
Sensitivity/Vulnerability		
Building condition	Proportion of structures classified as dilapidated or condemned	
Wall construction materials	Structure with walls made from predominantly light, salvaged and makeshift type materials.	
Date of construction	Proportion of structures constructed before 1992	
Area coverage to infrastructure related mitigation measures	% of areas not covered by infrastructure related mitigation measures (i.e. sea walls, flood control measures)	
Structure employing hazard mitigation design	Proportion of structures employing site preparation, hazard resistant and/or climate proofed design standards	
Local awareness	Proportion of households/property owners aware of natural hazards associated with climate change.	
Adaptive Capacity		
Government regulations	Presence and adherence to government regulations on hazard mitigation zoning and structural design standards	
Capacity and willingness to retrofit or relocate	Proportion of property owners with capacities and willingness to retrofit or relocate	
Insurance Coverage	Proportion of structures covered by property insurance	
Available alternative sites	Available land supply/alternative sites	
Government investments	Local government capacity to invest in risk management and CC adaptation/mitigation	

Table 2.6 Natural Resource based Production Areas Exposure, Sensitivity/Vulnerability and Adaptive Capacity Parameters

Indicator	Description
Exposure	
Classification	The general classification or use of the area (Fisheries, Agriculture, livestock, Production Forest etc.)
Varieties produced	Existing crop and fish varieties and forest products being produced
Annual production output	Annual production output per hectare
Replacement cost	Replacement cost expressed as Philippine Pesos per hectare
Number of farming dependent households	Number of households dependent on agriculture, fisheries and forest based production
Sensitivity/Vulnerability	
Access to early warning system	Proportion of production areas without access to production support early warning systems
Farmers/areas employing sustainable production techniques	Farmers not employing sustainable production techniques (i.e. Climate Proofing, use of hazard resistant crops varieties)
Local awareness/Access to information	Proportion of the population engaged in production aware of natural hazards associated with climate change.
Access to hazard mitigation measures/ structures	Proportion of production areas covered by hazard control measures (i.e. flood control, slope stabilization, sea walls, etc.
Irrigation Coverage	Proportion of production areas without access to irrigation
Water impoundment	Proportion of production areas without access to water impoundment infrastructures
Adaptive Capacity	
Access to financing	Proportion of production areas not covered by post disaster economic protection (insurance, microfinance)
Alternative Livelihood	Proportion of population with access to alternative livelihood
Government Extension Programs	Institutional financial and technical capacity to provide local agriculture and forestry based extension programs (Technology and knowledge transfer related to CC proofed production)
Government Infrastructure Programs	Institutional financial and technical capacity to implement hazard mitigation infrastructure projects

4. **Critical Point Facilities -** Special emphasis must be given in describing critical point facilities. These facilities provide key socio-economic support services such as schools, hospitals/rural health units, local government buildings, roads, bridges, air/sea ports, communication towers, power related facilities, water related facilities). Exposure information can be supplemented by building/structure specific information generated during sectoral/structural inventories such as construction cost, floor area, number of storeys, number of rooms (class rooms), bed capacity for hospitals/health facilities and services offered. Suggested indicators presented in Table 2.7

Table 2.7 Critical point facilities Exposure, Sensitivity/Vulnerability and Adaptive Capacity Parameters

Indicator	Description	
Exposure		
Classification	The general classification or use of the structure (School, Hospital, Rural Health Unit evacuation center, Water related facility, airport, seaport, barangay hall, municipal/city hall)	
Location	Location of the structure (i.e. Baranagay, Street Address)	
Floor Area	Estimated floor area in sq. meters	
Construction cost	Estimated construction cost	
Sensitivity/Vulnerability		
Wall construction materials	Structure with walls made from predominantly light, salvaged and makeshift type materials	
Building condition	Structures classified as dilapidated or condemned	
Structure employing hazard mitigation design	Proportion of structures employing site preparation, hazard resistant and/or climate proofed design standards	
Date of construction	Proportion of structures constructed before 1992	
Government regulations	Presence of government regulations on hazard mitigation zoning and structural design standards	
Access to infrastructure related mitigation measures	% of areas with no access to infrastructure related mitigation measures (i.e. sea walls, flood control measures)	
Adaptive Capacity		
Capacity and willingness to retrofit or relocate	Proportion of property owners with capacities and willingness to retrofit or relocate	
Insurance Coverage	Proportion of structures covered by property insurance	
Available alternative sites	Available land supply/alternative sites	
Available alternative structures	Existing alternative structures to accommodate current demand	
Government investments	Local government capacity to invest in social support infrastructure/facilities	

5. Lifeline utilities - cover the transportation, water distribution, drainage and power distribution networks. These are also important municipal/city assets which should be assessed to ensure the delivery of lifeline related services. Exposure can be expressed in the linear kilometers exposed, the construction cost or replacement values. At the minimum, LGUs limit the scope of establishing exposure for major access/ distribution networks. Suggested indicators presented in Table 2.8.


Table 2.8 Lifeline Utilities Exposure, Sensitivity/Vulnerability and Adaptive Capacity Parameters

Indicator	Description
	Exposure
Classification	The general classification or use of the lifeline (Road, Water distribution network, power)
Length/Distance	Estimated linear meters/kilometers
Construction/replacement cost	Estimated construction cost per linear kilometers
	Sensitivity/Vulnerability
Construction materials used	Construction materials used (i.e. Concrete, Asphalt, Gravel, Dirt)
Condition	Qualitative assessment of the existing condition of the distribution/access network
Structure employing hazard mitigation design	Proportion of structures employing site preparation, hazard resistant and/or climate proofed design standards
	Adaptive Capacity
Insurance Coverage	Proportion of structures covered by insurance
Government infrastructure related investment	Local government capacity to invest in infrastructure related projects (mitigation and construction of redundant systems)
Available redundant systems	Existing alternative routes/distribution networks

Step 4. Conduct a Climate Change Vulnerability Assessment (CCVA)

The Climate Change Vulnerability Assessment (CCVA) is a tool which assesses the vulnerabilities of the locality to the various climate related stimuli. The tool is qualitative in approach and hopes to determine the level of vulnerability of identified areas or sectors of interest. Vulnerability shall be based on the extent of exposure, and an analysis of the sensitivities and adaptive capacities. This will inform the identification of decision areas and be the subject of further detailing for the identification of area specific planning implications and policy interventions.

In this guideline, vulnerability of the system to the expected climate stimulus is the interplay of exposure, sensitivity and adaptive capacity. Vulnerability shall be operationalized using the following function:

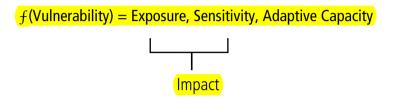

Where:

Vulnerability is the degree to which a system is susceptible to, or unable to cope with, adverse effects of climate change, including climate variability and extremes.

Exposure is expressed as the area and/or monetary unit, for social, economic and environmental related property. In terms of population exposure, it shall be expressed as the number of affected individuals or households exposed to the climate stimulus.

Sensitivity represents the intrinsic characteristics of the exposed elements to withstand the damaging effects of the expected climate stimulus.

Impact is the interplay between the extent of exposure and their sensitivities to the climate stimulus. It is the estimated direct and indirect impacts expressed in terms of damages, loss in productivity and quality of resources, and mortality, morbidity and impacts to the well-being of individuals.

Adaptive capacity is the ability of a system to adjust to climate change (including climate variability and extremes) to moderate potential damages, to take advantage of opportunities, or to cope with the consequences.

4.1 Determine Exposure

In this guideline, the climate stimuli shall be represented as an impact area (similar to hazard maps) to represent an indicative location and extent of the potentially affected area for a particular climate stimulus. Climate stimuli may range from changes in seasonal temperature and rainfall, number of dry days, and number of days with extreme temperatures and sea level rise. However, LGUs can conduct special climate change mapping studies by down-scaling provincial level data at the municipal/city level to establish site level variations of climate change variables. Establishing extent of exposure will be derived from the overlying of the impact area map and the exposure database for the various exposure units. Exposure shall be expressed in terms of area extent, number of affected persons and replacement cost depending on the exposure unit being analysed.

The Climate Change in the Philippines (PAGASA, 2013) provides indicative provincial level estimates of climate change parameters. LGUs can pursue city/municipal level downscaling to provide site level disaggregation of climate change parameters (refer to Figure 3.2a) to support site level sectoral climate change vulnerability assessments for a better identification of priority areas/sites within the locality where interventions can be implemented.

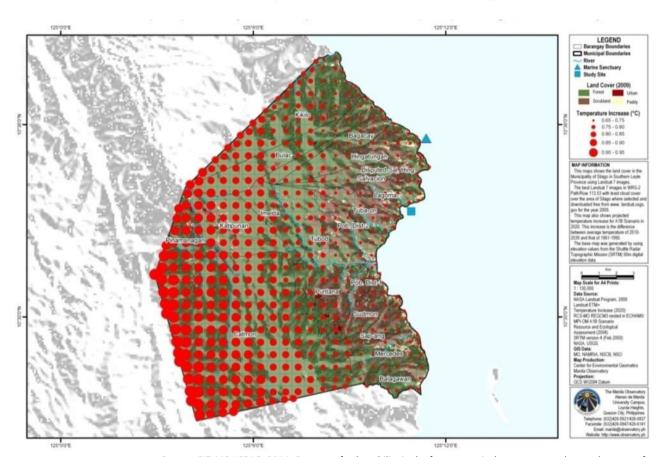


Figure 2.2a Land cover (2009) and projected temperature increase (2020) of Silago, Southern, Leyte

Source: GIZ-MO-ICRAF, 2011: Patterns of vulnerability in the forestry, agriculture, water, and coastal sectors of Silago, Southern Leyte, Philippines, ISBN: 978-971-94565-1-3

4.2 Conduct a sensitivity analysis and determine the degree of impact

Sensitivity is the degree to which a built, natural or human system is directly or indirectly affected by a particular climate stimuli (e.g., changes in seasonal temperature and precipitation, sea level rise). An analysis of the various sensitivity indicators of the exposed elements will give an indication of the potential degree of impact (the higher the sensitivity of the system, the higher the expected impacts). In the absence of quantitative information to measure direct or indirect damages, degree of impact may be assessed qualitatively as high, moderate or low (refer to table 2.9)

Table 2.9 Degree of Impact Score

Degree of Impact	Degree of Impact Score	Description
High	3	Estimated direct impacts in terms of number of fatalities, injuries and value of property damage will be disastrous given the extent of exposure and current sensitivity of the system. Medium to long term indirect impacts will also be experienced which may affect development processes. Significant costs needed to return to pre-impact levels.
Moderate	2	Moderate direct impacts in terms of terms of number of fatalities, injuries and value of property damage are expected given the extent of exposure and current sensitivities of the system. Short to medium term indirect impacts will also be experienced which may affect development processes. Medium to low cost needed to return to pre-impact levels within a short to medium time period.
Low	1	Estimated direct and indirect impacts are low to negligible which can be felt within a short term period. Minimal impacts to development processes and no significant cost needed to return to pre-impact levels.

4.3 Evaluate adaptive capacity

Information on the adaptive capacity of a system to accommodate the impacts of climate change are evaluated in this step. Information needed would be related to establishing the flexibility of a system measured by its current absorptive capacity, production practices, design standards, remaining economic life, among others. It is also important to know if there are barriers to the system's ability to accommodate changes. Covered here are the legal and regulatory framework under which the system operates, or the capability of government to finance necessary expansion works. Another dimension is the current situation of a system, whether it is already experiencing non-climatic stresses such as population growth, infrastructure decay, economic downturns, and damage from previous natural disasters.

An inventory of ongoing initiatives designed to address the impacts and capacities of private and public entities to finance future adaptation/mitigation related interventions will further indicate the readiness of the system to absorb future impacts. A qualitative assessment (high, moderate or low) may have to be undertaken in the absence of quantitative studies (refer to Table 2.10).

Table 2.10 Adaptive capacity score and description

Degree of Adaptive Capacity	Adaptive Capacity Rating ¹	Description
Low	3	The system is not flexible to accommodate changes in the climate. Addressing the impacts will be costly. The LGU and property owners will require external assistance to address the impacts.
Moderate	2	Addressing the impacts will require significant cost but it is still within the capacity of system to adapt to potential impacts. It can accommodate within its resources the cost for adapting and mitigating impacts.
High	1	The system is able to accommodate changes in climate. There are adaptation measures in place to address impacts.

¹Higher adaptive capacity is given a low rating/score while lower adaptive capacities are given higher rating/score are will have an Inverse relationship on vulnerability

4.4. Determine level of vulnerability

Vulnerability is the degree to which a system is susceptible to, or unable to cope with, adverse effects of climate change, including climate variability and extremes. In this guideline, the expected degree of impact will be compared to the level adaptive capacity to derive the level of vulnerability. A system that will potentially experience a high degree of impact (due to high exposure and sensitivity) and a low adaptive capacity can be considered highly vulnerable to the expected climate stimulus. The vulnerability assessment will be qualitative (high, medium, low) in approach.

Table 2.11 Vulnerability Index Scores

Degree of	Adar	otive Capacity S	Vola ovak ilito	Vulnerability		
Impact Score	High (1)	Moderate (2)	Low (3)	Vulnerability	Index Range	
High (3)	3	6	9	High	>6-9	
Moderate (2)	2	4	6	Moderate	>3-6	
Low (1)	1	2	3	Low	≤3	

4.5. Determine decision areas and interventions (adaptation and mitigation measures)

Priority decision areas and/or sectoral planning concerns can be identified based on the level of the vulnerability. Measures for climate change adaptation and mitigation can be identified to address underlying factors contributing to vulnerability such as reducing exposure, addressing sensitivities and enhancing adaptive capacities. There are eight broad categories of adaptation approaches/options (Burton et al., 1993)²:

- **Bear losses.** Implements the "do-nothing" approach and acceptance of possible impacts associated with expected impacts of climate stimuli.
- **Share losses.** Involves the sharing of potential losses through relief, rehabilitation, and reconstruction paid for from public or private funds. This can also pertain to losses shared through risk transfer mechanisms (e.g. insurance).
- Modify the threat. For certain hazards, establishing structural and non-structural measures can modify the severity of extreme hydro meteorological hazards (i.e. flood control, slope stabilization, sea walls, water impoundments, dams, levees). In the context of climate change, on a long-term scale, this can be achieved through the reduction of greenhouse gas atmospheric concentrations to minimize the effects of climate change and its impacts (i.e. rehabilitation of forests as carbon sinks, shifting to renewable sources of energy).
- **Prevent effects.** Refers to measures intended to increase the resistance or resiliency of a particular system or element to the expected effects/impacts. This may range from improving irrigation and water impoundment facilities to support crop production, improved building/construction regulations to address floods or storm surges.
- **Change use**. Where the threat of climate change makes the continuation of an economic activity impossible or extremely risky, consideration can be given to changing the use. For example, a farmer may choose to substitute a more drought- tolerant crop or switch to varieties with lower water requirements, changing built-up urban use areas into open spaces, parks, or greenbelt easements, crop or inland fishery areas may be reverted back to forest type land uses such as watersheds, mangroves, and/or national parks.
- **Change location.** A more extreme response is to change the location of economic activities. There is considerable speculation, for example, relocating major crops and farming regions away from areas of increased aridity and heat to areas that are currently cooler and which may become more attractive for some crops in the future. Relocation of exposed, highly vulnerable communities/settlements to safer areas.
- **Research.** The process of adaptation can also be advanced by research into new technologies and new methods of adaptation.
- Encourage behavioral change through education, information and regulation. Another type of adaptation is the dissemination of knowledge through education and public information campaigns, leading to behavioural change. Such activities have been slightly recognized and have received low priority in the past, but are likely to assume increased importance as the need to involve more communities, sectors and regions in adaptation becomes apparent.

24

² United Nations Environmental Programme-Institute for Environmental Studies, Handbook on Methods for Climate Change Impact Assessment and Adaptation Strategies, Chapter 5, pp. 4-5, October 1998

Step 5. Conduct a Disaster Risk Assessment (DRA)

Disaster Risk Assessment (DRA) is a methodology to determine the nature and extent of risk by analyzing potential hazards and evaluating existing conditions of vulnerability that together could potentially harm exposed people, property, services, livelihood and the environment on which they depend. Risk assessments with associated risk mapping include: a review of the technical characteristics of hazards such as their location, intensity, frequency and probability; the analysis of exposure and vulnerability including the physical, social, health, economic and environmental dimensions; and the evaluation of the effectiveness of prevailing and alternative coping capacities in respect to likely risk scenarios³.

In the context of this guideline, risk shall be a function of likelihood of occurrence and the severity of consequence.

f(Risk) = Likelihood of Occurrence, Severity of Consequence

Where:

Risk is the combination of the probability (represented as the likelihood of occurrence) of an event and its potential negative consequences (severity of consequence) for a given area and reference period.

Likelihood of occurrence of hazards as the estimated period of time expressed in years, a hazard event is likely to repeat itself. It also incorporates the projected changes in frequency and intensity of the hazard as a result of climate change.

Severity of Consequence is the function of exposure and vulnerability and measures the potential direct and indirect damages/impacts and the interplay of exposure and the vulnerability relative to the expected intensity of the hazard.

5.1 Assign the likelihood of occurrence

The use of probability to indicate recurrence requires a record of occurrences of a hazard in a specified location (e.g. instrumental records). Often times, records are lacking or are not readily available and require modeling and processing by the scientific community. In this guideline, the Likelihood of the hazard is an estimate of the period of time a hazard event is likely to repeat itself expressed in years. For simplification purposes, and when certainty is less determined from records, this may be estimated by the likely occurrence of the natural event. This broadly defines a return period of a hazard (ex. flood). Knowing the time interval for a hazard event to occur again, is important because it gives an idea of how often a threat from a hazard may be expected.

Table 3.13 below provides the range of likelihood, their corresponding return period, and scores used in this guideline. The ranges describe an ordered but descriptive scale which can be assigned to real or assumed hydro-meteorological or geophysical events. The likelihood score ranges from 1-6. A score of 1 is given to very rare events (every 200-300 or more years and for example, volcanic eruptions, very strong ground shaking) while a score of 6 is given to frequently recurring or very likely recurring hazards (every 1 to 3 years and for example, recurring floods).

³ Republic Act 10121, Philippine Disaster Risk Reduction and Management Act of 2010. HLURB-CCC-UNDP-AusAID | PROJECT CLIMATE TWIN PHOENIX

Table 2.12 Indicative Likelihood of Occurrence Scores

Measure of Likelihood	Return Period in Years	Likelihood Score
Frequent	Every 1-3 years	6
Moderate	Every >3-10 years	5
Occasional	Every >10-30 years	4
Improbable	Every >30-100 years	3
Rare event	Every >100-200 years	2
Very rare event	Every >200 years	1

Source: Reference Manual on Mainstreaming Disaster Risk Reduction and Climate Change Adaptation in the Comprehensive Land Use Plans Report, NEDA-HLURB-UNDP,2012

LGUs should seek the assistance of mandated agencies and the scientific community to help explain the hazard likelihood for the event considered. Also, consultation with local communities can be pursued to establish the likelihood of occurrence based on past experiences.

5.2 Determine Exposure

Determining exposure involves the estimation of the number of affected individuals, structures and extent of areas located within hazard susceptible areas. These can be done by overlaying hazard and the exposure map (i.e. population, property, critical point facilities and lifeline utilities). Based on the map overlying, the estimated exposed elements can be computed and summarized, including the vulnerability attributes of the elements exposed. These vulnerability attributes will be the basis for estimating the severity of consequence in succeeding tasks.


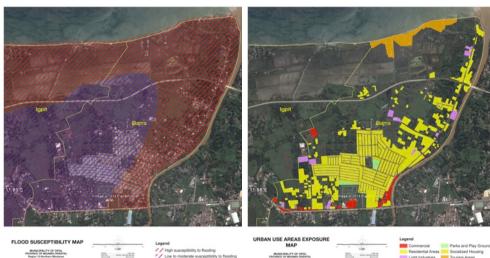


Figure 2.3 Sample Urban use area flood exposure mapping

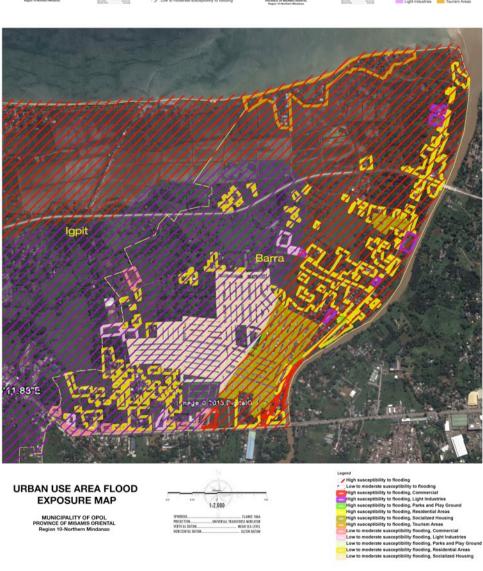

5.3 Estimate the Severity of Consequence

Consequence is a component of risk (Risk = Probability x Consequence) from a recurring hazard event. Assigning the severity of consequence score shall be based on the expected magnitude of the hazard (hazard characterization), the extent of exposure (determined through hazard exposure mapping) and the vulnerabilities of the exposed elements (compiled in the exposure database), the combination of which will be the basis for determining the severity of consequence rating. Although the indicators selected for the vulnerability analysis are likely to be interrelated, it has been assumed (for the purpose of this guideline) that each indicator can contribute dependently or independently to the vulnerability of an individual, community, structures and natural resource-based production areas.

Severity of consequence shall be determined qualitatively using the suggested severity of consequence score matrix. The maximum damage ratios were based on the maximum thresholds/criteria set by the NDCC Memorandum Order No 4. series of 1998 for declaring a state of calamity (refer to table 2.14).

Table 2.13 Severity of Consequence Score Matrix

	ı				ı	I
Category	Severity of Consequence Score	Population	Urban Use Areas	Description Natural Resource based Production Areas	Critical Point	Severity of Consequence Score
Very High	4	>40% of Non-Residential structures are severely damaged OR >20% of Residential Structures are severely damaged	>40% of Non-Residential structures are severely damaged OR >20% of Residential Structures are severely damaged	> 40% of exposed production areas/means of livelihood such as fishponds, crops, poultry and livestock and other agricultural/forest products are severely damaged;	Damages may lead to the disruption of services which may last one week or more	Disruption of service by lasting one week or more (for Municipalities) and one day for Highly Urbanized Areas
High	m	>20 to <40% Non-Residential based structures are severely damaged OR >10-20% Residential Structures are severely damaged	>20 to <40% Non-Residential based structures are severely damaged OR >10-20% Residential Structures are severely damaged	20 to <40% of exposed production areas/means of livelihood such as fishponds, crops, poultry and livestock and other agricultural/forest products are severely damaged;	Damages lead may to the disruption of services which may last three days to less than a week	Disruption of service by approximately five days for municipalities and less than 18 hour disruption for highly urbanized areas
Moderate	2	>10 to 20% Non-Residential structures are severely damaged OR >5 to 10% of dwelling units are severely damaged	>10 to 20% Non- Residential structures are severely damaged OR >5 to 10% of dwelling units are severely damaged	10 to <20% of exposed production areas/means of livelihood such as fishponds, crops, poultry and livestock and other agricultural/forest products are severely damaged;	Damages may lead to the disruption of service lasting for one day to less than three days	Disruption of service by approximately three days for municipalities and less than six hour disruption for highly urbanized areas
Low	-	\$10% of production based structures are severely damaged OR \$55% of dwelling units are severely damaged	<10% of production based structures are severely damaged OR<5% of dwelling units are severely damaged	<10% and below of of exposed production areas/ means of livelihood such as fishponds, crops, poultry and livestock and other agricultural/ forest products are severely damaged;	Damages may lead to the disruption of service lasting less than one day	Disruption of service by approximately one day for municipalities and less than six hour disruption for highly urbanized areas

5.4 Estimate Risk

Risk is defined as the combination of the probability of an event and its negative consequences. This step deals with the estimation of the level of risk on the various exposed and vulnerable elements. Risk Estimation involves finding the intensity of risks formed by the product of the scores from the likelihood of the hazard and the severity of the consequence:

Risk = Likelihood of Occurrence x Severity of Consequence

The associated risk mapping should be able to depict/indicate high risk areas as the basis for identifying decision areas and prioritization.

Table 2.14 Risk Score Matrix for Prioritization

1 1: .:	Likelihood		Severity of Con	sequence Score	
Indicative Likelihood of	of	Very High	High	Moderate	Low
Occurrence	Occurrence Score	4	3	2	1
Frequent (1-3 Years)	6	24	18	12	6
Moderate (4-10 Years)	5	20	15	10	5
Occasional Slight Chance (11-30 Years)	4	16	12	8	4
Improbable (31-100 Years)	3	12	9	6	3
Rare (101-200 Years)	2	8	6	4	2
Very rare (>200 years)	1	4	3	2	1

Source: Mainstreaming Disaster Risk Reduction and Climate Change Adaptation in the Comprehensive Land Use Plans Report, NEDA-UNDP-HLURB,2012

The resulting risk score/categories, and risk maps, will provide a qualitative index of the various location of priority risk areas in the locality. Based on the computed risk score/s, reclassify into risk categories using the Risk Score Matrix (refer to table 2.16). Risk scores reflect three possible scenarios:

- **High Risk Areas** areas, zones or sectors may be considered High Risk if hazard events have Very High to moderate severity of consequence given the scale of exposure, vulnerability to the potential impacts of the hazards and the level adaptive capacity to endure the direct and indirect impacts of the hazard and likelihood of occurrence ranging from frequent to improbable events. The range of risk score for this scenario is 12-24.
- **Moderate Risk** areas, zones or sectors may be considered at Moderate Risk if the Likelihood of occurrence of a hazard event is either Improbable to Rare event with a very high to moderate severity of consequence. These may also pertain to areas where the severity of consequence is Moderate to Minor but with a likelihood of occurrence that is frequent. The range of risk score for this scenario is 5-<12.
- **Low Risk** areas, zones or sectors may be considered low risk due to the frequency of the hazard (very rare or >200 years) with very high to high severity of consequences. It may also pertain to moderate to low severity of consequence from an occasional to a very rare event. Risk scores for this scenario is < 5.

The suggested risk score matrix adopts the probabilistic risk estimation approach where the combination of the frequency (likelihood of occurrence) of the hazard and its resulting damage (severity of consequence) are used as basis for identifying and prioritizing risk areas for immediate implementation of risk management options under the notion that resources are often limited. Available resources can be initially allocated for addressing priority areas (or high risk areas) in need of immediate interventions characterized by areas where the estimated damage will be very high to high and the likelihood of occurrence of the hazard is within 10-100 years. However, in a land use planning perspective, areas considered as low risk areas where the expected damage is very high but are triggered by rare to extremely rare events (>100 years) can and should also be addressed within the short term to medium term when available resources permit.

5.5. Identify Decision Areas and Interventions (Risk Management Options)

The concept and practice of reducing disaster risks through systematic efforts to analyze and manage the causal factors of disasters, including through reduced exposure to hazards, lessened vulnerability of people and property, wise management of land and the environment, and improved preparedness for adverse events⁴. Disaster risk reduction measures may be classified into four major categories and their subcategories as follows⁵:

a. **Risk Avoidance/elimination** - removing a risk trigger by not locating in the area of potential hazard impact, not purchasing vulnerable land or building; or denying a risk by creating an activity or simply refusing to engage in functions that could potentially be affected by risks;

⁴ United Nations International Strategy for Disaster Reduction , UNISDR Terminology on Disaster Risk Reduction, 2009.

⁵ NEDA-UNDP-EU. 2009. Mainstreaming Disaster Risk Reduction in Subnational Development and Land Use/Physical Planning. HLURB-CCC-UNDP-AusAid | PROJECT CLIMATE TWIN PHOENIX

- b. **Risk mitigation** reducing the frequency of occurrence or the severity of the consequence by changing physical characteristics or operations of a system or the element at risk. It can take on the following subcategories:
 - Risk prevention instituting measures to reduce the frequency of occurrence and magnitude of hazard's adverse impact through the establishment of structures such as levees, flood walls, dams, and sea walls;
 - Risk or loss reduction through mitigation modifying the characteristics of elements exposed to lessen the adverse impacts of hazards either through structural or non-structural measures. This can be in the form hazard resistant building/construction design, and increasing socio-economic well being of communities to improve coping capacities and resiliency;
 - Risk or loss reduction through preparedness mechanisms to anticipate the onset of hazards, increase awareness, and improve capacities to respond and recover from the impact of hazards. This can be in form of establishing early warning systems, formulating contingency plans, increase awareness through information, education and communication campaigns;
 - Segregation of exposure by duplication or redundancy increasing system sustainability by providing back-up support for elements that may become non-functional or disrupted during and after the hazard impact. This may be in the form of alternative linkage/transportation systems, redundant water and power distribution systems, and construction of additional critical facilities (i.e. hospitals, schools, power plants, etc.);
 - Segregation of exposure by separation increasing system capacity and robustness through geographic, physical and operational separation of facilities and functions.
- c. **Risk sharing or risk transfer** shifting the risk-bearing responsibility to another party, often involving financial and economic measures particularly the use of the insurance system to cover and pay for future damages. In some literature, the segregation of exposure by separation is considered as a risk- spreading or risk-transfer option; and
- d. **Risk retention or acceptance** this is the "do-nothing" scenario where risks are fully accepted and arrangements are made to pay for financial losses related to the hazard impact or to fund potential losses with own resources;

Step 6. Summarize Findings

Once the planning areas are prioritized, LGUs will be tasked to analyze the spatial development issues and concerns, and enumerate the possible policy interventions to address it to reduce the risks at tolerable levels.

32

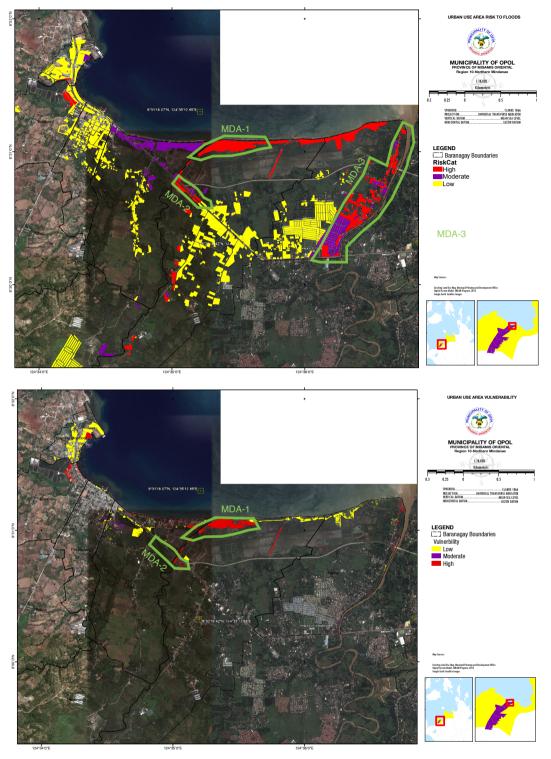


Figure 2.4 Detailing of decision areas.

Identification of major decision areas (urban use areas) using the Identified flood risk decision areas (above) and Sea Level Rise vulnerability decision areas (below). Indicative boundary of two major decision areas in Barangay Igpit highlighted in green. These areas will be the subject of risk management options such possible incremental relocation of settlement areas, expansion of coastal easements, and rehabilitation of the watershed.

Table 2.15 Sample Issues Matrix Urban Use Areas

Α	В	С	D	E
Decision Area/s	Description	Problems/Hazards	Impacts/Implications	Policy Interventions
Igpit - Informal settler areas (MDA-1)	Area located at the mouth of the Bungcalalan River adjacent to the Macalajar Bay	Areas prone to riverine and coastal flooding, potential area submersion to due to sea level rise in the long term. Changes in tidal patterns may impact storm surge patterns specifically wave heights and inland inundation. Note: Risks to other hazards can be incorporated to describe the area for a more comprehensive and multihazard approach in identifying policy interventions/ recommendations	 Severe potential damages to residential structures due to floods. Potential submersion of settlements due to sea level rise in the long term. Potential isolation of communities, injuries and casualties during floods and, storm surges; Establishment of sea walls and mitigation measures to retain current land uses will be costly, costs can not be shouldered by affected families and the LGU; Future uncontrolled growth of settlements may increase exposure and risks; 	 Relocation of informal settler families, employ managed retreat or incremental relocation; Establishment of early warning systems and formulation of flood contingency plans to minimize potential injuries and casualties during the implementation of relocation; Identification of additional 9.29 hectares of residential to accommodate potentially affected families and provision of comprehensive housing program for affected families especially the informal settlers; Designating areas for wetland and mangrove restoration and serve as part of the ecotourism network; New transportation systems will not be pursued in the area to discourage future settlement growth;

Α	В	С	D	E
Decision Area/s	Description	Problems/Hazards	Impacts/Implications	Policy Interventions
Barra Riverside Settlement areas (MDA-3)	Major growth area with mixed land uses located along the Iponan River	Mainly riverine flooding along the Iponan River with sea level rise near the river mouth	 Potential severe damage to settlement areas and possible deaths and injuries along the riverside areas due to floods; Potential submersion of settlements due to sea level rise in the long term especially along the river mouth; Riverbank erosion and possible failure of riverbank slopes affecting structures; Future growth in the area may increase exposure and risks if no interventions are implemented; 	 Establishment of expanded easements along the river side and changing these areas for open space development; Mandatory relocation of structures within the expanded easements and sea-level rise impact area; Low density development shall be employed within highly susceptible prone areas to minimize the level exposure; Change the land use mix from residential to commercial or any land use mix where cost for effective mitigation can be shouldered by proponents/developers; Development of settlement areas shall be subject to development restrictions with emphasis on the imposition of hazard resistant design regulations; Mandatory retrofitting of structures within a period of 10 years; All costs related to the establishment of mitigation measures such as riverbank protection structures shall be shouldered by the property owners through the imposition of special levy taxes; Establishment of early warning systems and formulation of flood contingency plans to minimize potential injuries and casualties Conduct of site specific flood modeling studies to inform development regulations;

Integrating Climate and Disaster Risks in the Comprehensive Land Use Plan

The second phase of the mainstreaming framework is the integration of the key findings in the climate and disaster risk assessment in the various steps of the CLUP formulation process. This will allow a better analysis of the situation to allow decision makers make informed decisions during visioning, goal formulation, strategy generation, land use policy formulation and zoning.

Set the Vision (Step 3)

Mainstreaming climate and disaster risks in the CLUP starts with the enhancement of the vision statement by integrating climate change adaptation and and disaster risk reduction and management principles in describing the ideal state of locality in terms of the people as individuals and society, local economy, built and natural environment, and local governance. Descriptors should put emphasis on the principles of adaptation and risk reduction such as safe, risk-resilient, and enhancing adaptive and coping capacities. The vision shall provide the overall guide to the succeeding steps of the CLUP planning process.

Situational Analysis (Step 4)

The climate and disaster risk assessment provides the climate and disaster risk perspectives for a deeper analysis of the planning environment. The emphasis is on the implications of climate change and hazards, to the various development sectors/sub-sectors (i.e. demography/social, economic, infrastructure and utilities) and the land use framework.

It allows climate and disaster risk concerns to be incorporated in the identification of issues, concerns and problems and ensure that identified policy interventions address both the potential impacts of climate change, hazards and risks.

The results of the CDRA along with other sectoral studies shall provide the opportunity for a more integrated approach in the practice of land use planning.

Set the Goals and Objectives (Step 5)

Recognizing risk reduction and management as prerequisite to sustainable development and informed of the development implications, issues, concerns, and problems brought about by climate and disaster risks, the municipality/city should be able to enhance its goals and objectives to guide physical growth of the locality, and support and compliment sectoral/sub-sectoral development.


Establish Development Thrust and Spatial Strategies (Step 6)

Climate and disaster risk information allows decision makers and stakeholders to revisit the current development thrust, identify possible alternatives, evaluate and select the preferred development thrust that accounts for the current and potential implications of climate and disaster risks.

The extent of natural hazards, severity of consequence, degree of risks and the amount of required risk reduction and management measures are considerations for determining the best spatial development that promotes a safe built-environment, risk resilient production environment, balanced ecology, and efficient and functional linkages among the various development areas.

HLURB-CCC-UNDP-Ausaid | Project Climate Twin Phoenix 36

Figure 2.4 Entry-points for Mainstreaming Climate and Disaster Risks in the Comprehensive Land Use Plan

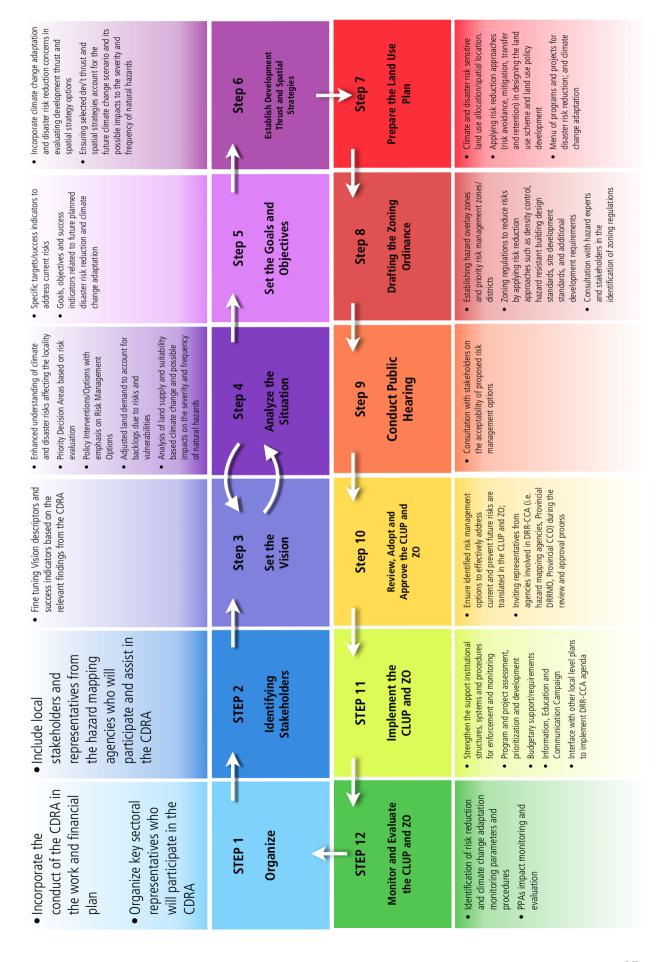

Prepare the land use plan (Step 7)

The land use design/scheme deals with the allocation and location of the various land use categories generally based on the projected service requirements, location standards, land suitability studies, costs, aesthetics, accessibility and other considerations. Land use policies refers to specific guidelines, methods, procedures, rules and forms that will guide the use of lands. In this guideline, emphasis will be given to design approaches/options to address current risks, prevention of future risks, and anticipating climate change impacts through proper siting and construction of the built environment and sustainable management of natural resources.

Urban use areas land use policies, in general, may include policies intended to ensure the safety and welfare of the population, minimize potential damages to buildings, and ensure adequate provision and access to important socio-economic support services. These can be achieved through proper location (i.e. prioritizing residential and critical point facilities in relatively safe areas or areas where mitigation is feasible), imposition of hazard resistant building design regulations for areas prone to hazards, density control measures (i.e minimizing density in hazard prone areas and increasing density in relatively safe areas), construction of risk mitigation structures to protect important urban use areas (i.e. flood control, sea wall, slope stabilization mitigation structures), establishing redundancies or back-up systems for important socio-economic support facilities (i.e. hospitals, schools, commercial areas, government facilities).

For production land uses, recommended policies emphasizes on the resiliency and sustainable utilization of natural resources given the challenges of climate and disaster risks. This may include economic protection or safety nets (i.e. crop insurance, building insurance), establishing resource production support infrastructure (i.e. irrigation and water impoundments), and promoting sustainable and/or climate resilient resource production techniques (i.e. use of hazard resistant varieties, climate sensitive production)

Protection land use policies emphasizes on the conservation, preservation, and rehabilitation of significant natural resource areas because of their long-term strategic benefit and contributions to climate change adaption and mitigation. These may cover protection policies for critical watershed areas to manage potable and surface water resources; rehabilitation of upland forests as a strategy for managing low land flooding, enhance the quality of the natural environment, contribute to the mitigation of GHG; and preservation of coastal wetlands and mangrove areas. Furthermore, these recommended policies will also cover areas where the mitigation of risks are unfeasible and impractical to pursue due to the frequency and magnitude of geologic and volcanic hazards, as well as, the projected impacts of climate change on the frequency, magnitude and spatial extent of hydro-meteorological hazards. Policies may include expanded easements, declaring areas as no settlement areas, and designating certain areas for open spaces.

For infrastructure and utilities, policies may include protection of critical point facilities through site selection (locating in relatively safe areas), applying the concept of service redundancy to ensure continued area access and provision of social and economic support services, strict imposition of hazard resistant building and structural design standards for critical emergency management services and government facilities.

Drafting the Zoning Ordinance (Step 8)

Zoning is concerned primarily with the use of land and the regulation of development through imposition of building heights, bulk, open space, and density provisions in a given area⁶. In the context of DRR-CCA, zoning provisions may range from hazard resistant structural design regulations, prescribing allowed uses, and density control (i.e. building height, FAR, MAPSO, etc.) within identified hazard prone areas, intended to reduce property damage to acceptable levels and ensure the preservation of life and general welfare of

⁶ HLURB, CLUP Guidebook, Volume 3: Model Zoning Ordinance, 2014 HLURB-CCC-UNDP-AusAid | PROJECT CLIMATE TWIN PHOENIX

property owners. It also include cross cutting provisions in support of CCA such as those related to water and energy efficiency, and green building design.

Implement the CLUP and ZO (Step 11)

Mainstreaming of climate and disaster risks in local development is further promoted in the implementation of the CLUP and enforcement of the ZO. This phase provides the opportunity for LGUs to review and enhance current institutional capacities, structures, systems and procedures for continuous/sustained risk reduction and management related planning; policy, program, and project development and management; resource generation/fiscal management; investment programming, and regulation (enforcement of ZO). It also deals with the importance of interfacing the CLUP with other local level plans to implement priority DRR-CCA PPAs through the CDP and LDIP/AIP.

Monitoring and evaluate the CLUP and ZO (Step 12)

Monitoring and evaluation serves as the feed back mechanism to ensure that DRR-CCA related interventions and its intended/desired results and benefits are achieved during the planning period. It will also serve as a basis for revising DRR-CCA related policy interventions so that alternative risk reduction and management measures and options can be identified and included in the CLUP and ZO revision.

Climate and Disaster Risk Assessment

3

Assessing risks and vulnerabilities, determining priority decision areas and risk management and adaptation options

Step 1. Collect and analyze climate and hazard information

Objectives:

- Understand the various future climate scenario/s by analyzing climate change scenarios;
- Characterize the natural hazards that may potentially affect the locality/barangay;
 - Understand previous disasters and severely affected elements;

Outputs:

- Local Climate Change Projections;
- Inventory of natural hazards and their characteristics;
- Tabular compilation of historical disaster damage/loss data;
- Summary barangay level hazard inventory matrix;

Process:

Task 1.1 Collect and analyze climate change information

Task 1.2 Collect and organize hazard information

Sub-task 1.2.1 Gather hazard maps and characterize hazards

Sub-task 1.2.2 Analyze previous disasters

Sub-task 1.2.3 Prepare a barangay level summary hazard inventory

Task 1.1. Collect and organize climate change information. This step involves collecting and reviewing important climate change information relevant to the local government unit. Key climate variables to collect are temperature, precipitation and extreme events (i.e. number of dry days, number of days with temperature exceeding 35°C, and number of extreme rainfall events). The basic source for climate information is the Climate Change in the Philippines publication of PAGASA. It includes the baseline climate trends from 1971-2000 where the projected changes in 2020 (2006-2035) and 2050 (2036-2065) can be compared. The climate projections are available for each region and province of the country. The municipality or city, at first pass, may consider the provincial data, and consult PAGASA on the applicability.

Seasonal Temperature. In the case of the Municipality of Opol, the Provincial level projections were used. In computing for the 2020 and 2050 projected seasonal temperature, the projected changes per season were added to the observed baseline (refer to table 3.1.1).

Table 3.1.1 Seasonal Temperature increases (in $^{\circ}$ C) in 2020 and 2050 under the medium-range emission scenario in provinces in Region 10

	OBSERVED BASELINE (1971-2000)				CHANGE in 2020 (2006-2035)				CHANGE in 2050 (2036-2065)			
	DJF	MAM	JJA	SON	DJF	MAM	JJA	SON	DJF	MAM	JJA	SON
Region 10												
BUKIDNON	25.1	26.5	25.8	25.7	1.0	1.2	1.2	1.0	1.9	2.3	2.4	2.1
LANAO DEL NORTE	24.4	25.5	25.4	25.2	1.0	1.1	1.0	1.0	1.9	2.2	2.1	1.9
MISAMIS OCCIDENTAL	25.6	26.7	26.6	26.4	1.0	1.1	1.1	1.0	1.9	2.2	2.2	1.9
MISAMIS ORIENTAL	25.4	26.8	26.9	26.5	1.0	1.2	1.2	1.0	1.9	2.3	2.4	2.0

Source: Climate change in the Philippines, PAGASA 2011, page 41.

Projected seasonal temperature for 2020 and 2050 for the Province of Misamis Oriental (Medium Range Emission Scenario) can be computed as follows:

```
2020 Projected Seasonal Temperature DJF = Baseline DJF + 2020DJF
2020 Projected Seasonal Temperature DJF = 25.4 + 1.0
2020 Projected Seasonal Temperature DJF = 26.4
2020 Projected Seasonal Temperature MAM = BaselineMAM + 2020MAM
2020 Projected Seasonal Temperature MAM = 26.8 + 1.2
2020 Projected Seasonal Temperature MAM = 28.0
```

The computations can be organized as follows:

Table 3.1.2 Medium emission range projected seasonal temperature scenarios for 2020 and 2050, Province of Misamis Oriental

		Seaso	on	
Period	DJF	MAM	JJA	SON
Observed 1971-2000	25.40	26.80	26.90	26.50
Change in 2020 (2006-2035)	26.40	28.00	28.10	27.50
Change in 2050 (2036-2065)	27.30	29.10	29.30	28.50

In this example, the data suggests that the area will experience relatively warmer conditions by 2020 and 2050 compared to the observed seasonal temperatures. There will be 1.2°C warming during the MAM and JJA while a 1.0°C warming during the DJF and SON seasons in 2020. In 2050, temperature may increase by as much as 2.3-2.4°C during the MAM and JJA seasons respectively, while the projected increase during the DJF and SON season will be 1.9°C and 2.0°C respectively.

Seasonal Rainfall. For seasonal rainfall, projected data are expressed as percentage change from the baseline values. The percentage change are multiplied to the baseline values to get the rate of change in mm and added to the baseline values to derive the projected seasonal rainfall values (Table 3.1.3).

Table 3.1.3 Seasonal rainfall change (in %) in 2020 and 2050 under the medium-range emission scenario in provinces in Region 10

	OBSERVED BASELINE (1971-2000) mm				CHANGE in 2020 (2006-2035)				CHANGE in 2050 (2036-2065)			
	DJF	MAM	JJA	SON	DJF	MAM	JJA	SON	DJF	MAM	JJA	SON
Region 10												
BUKIDNON	329.7	335.6	653.8	559.5	2.9	-10.3	-4.4	-0.3	-5.1	-13.0	-9.7	-5.8
LANAO DEL NORTE	337.5	350.3	662.5	621.1	9.6	-0.6	-2.2	6.9	2.5	-1.9	1.4	7.1
MISAMIS OCCIDENTAL	392.1	323.4	633.1	728.3	9.1	1.4	-6.1	6.1	5.2	0.3	-5.1	4.6
MISAMIS ORIENTAL	442.5	296.0	615.7	581.1	4.6	-10.4	-3.7	2.9	1.8	-17.8	-5.2	-0.1

Source: Climate change in the Philippines, PAGASA 2011, page 41.

Projected seasonal rainfall for 2020 and 2050 for Misamis Oriental (Medium Range Emission Scenario) can be computed as follows:

```
2020 Seasonal Rainfall (DJF) = Baseline DJF + ((Baseline DJF)*(2020DJF))
2020 Seasonal Rainfall (DJF) = 442.5 + (442.5*4.6%)
2020 Seasonal Rainfall (DJF) = 442.5 + 20.355
2020 Seasonal Rainfall (DJF) = 462.85

2020 Seasonal Rainfall (MAM) = Baseline MAM + ((Baseline MAM)*(2020MAM))
2020 Seasonal Rainfall (MAM) = 296.0 + ((296.0*(-10.4%)))
2020 Seasonal Rainfall (MAM) = 296.0 + (-30.78)
2020 Seasonal Rainfall (MAM) = 265.22
```

Computed data can be organized as follows:

Table 3.1.4. Medium emission range projected seasonal rainfall scenarios for 2020 and 2050, Province of Misamis Oriental

au	Observed 1971-2000					
Climate Variable	DJF	MAM	JJA	SON		
Observed 1971-2000	442.50	296.00	615.70	581.10		
Change in 2020 (2006-2035)	462.86	265.22	592.92	597.95		
Change in 2050 (2036-2065)	450.47	243.31	583.68	522.99		

In this example, the data suggests that there will be a reduction in rainfall during the summer and habagat seasons in 2020 and 2050. Also, there will be a slight increase in rainfall during amihan season, but amount of rain expected to be lesser than the habagat and transition seasons. Summer months are expected to be drier and amihan months will be slightly wetter compared to observed trends.

Extreme events. Provincial level projections provide three climate variables to cover extreme events namely number of days with temperature exceeding 35°C, number of days (defined as days with rainfall less than 2.5mm), and the number of extreme daily rainfall. Projected data are expressed in frequency and can be compared to observed trends to establish the projected changes in 2020 and 2050.

Table 3.1.5 Frequency of extreme events in 2020 and 2050 under medium-range emission scenario, Province of Misamis
Oriental

Climate Variable	Observed 1971-2000	2020 (2006-2035)	2050 (2036-2065)
No of days with Temp >35°C	382	4,539	6,180
No. of dry days (rainfall < 2.5mm)	8,251	6,413	7,060
No of days with Extreme Rainfall > 150mm	10	13	9

Source: Climate change in the Philippines, PAGASA 2011, page 41.

Based on the data, there will be a significant increase in the number of days exceeding 35°C in 2020 and 2050 based on observed trends. In terms of extreme rainfall, the number of dry days will decrease in 2020 and 2050 but the number of extreme daily rainfall event will increase in 2020 and a slight decrease in 2050 compared to observed trends

Sea Level Rise. Representative Concentration Pathways (RCPs) are scenarios that include time series of emissions and concentrations of the full suite of greenhouse gases and aerosols and chemically active gases, as well as land use/land cover (Moss et al., 2008). Four RCPs produced from Integrated Assessment Models were selected from the published literature and are used in the present IPCC Assessment as a basis for the climate predictions and projections⁷. The Global mean sea level rise for 2081–2100 relative to 1986–2005 will likely be in the ranges of 0.26 to 0.55 m for RCP2.6, 0.32 to 0.63 m for RCP4.5, 0.33 to 0.63 m for RCP6.0, and 0.45 to 0.82 m for RCP8.5 (medium confidence)⁸. It is important to note that regional rates of sea level rise can vary. This is the result of regionally differing rates of thermal expansion of the oceans as well as regional differences in atmospheric circulation, which can affect relative sea levels. In addition, many coastal areas are either subsiding or being uplifted.

The LGU may also consider international or local published studies which provide climate and climate change information applicable for their locality. Local or indigenous knowledge are also important sources of information. Indigenous peoples, particularly have a way of interpreting meteorological phenomena which have guided their responses to climate variation particularly in their livelihood practices. Downscaling of climate projections⁹ at the municipal level, as demonstrated in Siligao, Southern Leyte, can also be pursued by LGUs to provide site specific climate change parameters.

Summary of the projected changes in climate variable

Prepare a summary of projected changes in the climate variables. Computed values can be further summarized and organized using the recommended summary table. This table shall facilitate the identification the expected changes in climate variables and the the comparison between the observed and projected changes. This output shall be used for the initial scoping of impacts in step 2.

⁷IPCC, 2013: Climate Change 2013: The Physical Science Basis. Contribution of Working Group I to the Fifth Assessment Report of the Intergovern- mental Panel on Climate Change [Stocker, T.F., D. Qin, G.-K. Plattner, M. Tignor, S.K. Allen, J. Boschung, A. Nauels, Y. Xia, V. Bex and P.M. Midgley (eds.)]. Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA, p. 1461.

⁸ Ibid, p. 11.

⁹ CLUP Resource Book: Integrating Climate Change and Adaptation and Disaster Risk Reduction and Management, CCC-GIZ, October 2013, p.87 HLURB-CCC-UNDP-AusAid | PROJECT CLIMATE TWIN PHOENIX

Table 3.1.6. Summary of Projected Changes in Climate Variables, Municipality of Opol, Misamis Oriental

Climate Variable	Observed Baseline (1971-2000)	Specific Change Expected and Reference Period	General Changes Expected in Climate Variables	Information about patterns of change
(1)	(2)	(3)	(4)	(5)
Temperature	 25.4°C during the DJF 26.8°C during MAM 26.9°C during JJA 26.5°C during SON 	 26.4°C by 2020 and 27.3°C by 2050 during DJF 28.0°C by 2020 and 29.1°C by 2050 during MAM 28.1°C by 2020 and 29.3°C by 2050 during JJA 27.5°C by 2020 and 28.5°C by 2050 during SON 	• Increasing in temperature for all seasons expected in 2020 and 2050	• Slightly more warming in MAM, and in the JJA season
Rainfall	 442.5 during the DJF 296.0 during MAM 615.7 during JJA 581.1 during SON 	 462.86 by 2020 and 450.47°C by 2050 during DJF 265.22 by 2020 and 243.31 by 2050 during MAM 592.92 by 2020 and 597.9 by 2050 during JJA 597.95 by 2020 and 522.9 by 2050 during SON 	 Increasing in rainfall during DJF for 2020 and 2050 Decreasing in rainfall during MAM for 2020 and 2050 Decreasing during JJA for 2020 and 2050 Increasing in rainfall during SON for 2020 but decreasing in 2050 	 Reduction in rainfall during the summer and Habagat seasons in 2020 and 2050 Increase during Amihan season, but amount of rain expected to be lesser than the Habagat and transition seasons Reduction in rainfall during the MAM and JJA months Wetter Amihan months DJF and SON
Number of Hot days	• 383 days	 4,539 days exceeding 35°C in 2020 6,180 days exceeding 35°C in 2050 	 Increasing number of hot days (exceeding 35°C) 	• Significant increase in the number of hot days expected in 2020 and 2050
Number of dry days	• 8,251 days	 6,413 days with <2.5 mm of rain in 2020 7,060 days with <2.5 mm of rain in 2050 	 Decreasing number of dry days (<2.5 mm of rain) 	There will be more days with rainfall (less days without rainfall compared to baseline)
Extreme daily rainfall events	• 10 extreme rainfall events exceeding 150mm	 13 days with rainfall > 150 mm in 2020 9 days with rainfall > 150 mm in 2050 	• Heavy daily rainfall >150 mm increasing in 2020 and decreasing by 2050	 More extreme daily rainfall expected (>150mm) in 2020 but more or less the same in 2050 compared to baseline.
Sea level ¹		Projected change by 2100 relative to 1986-2005 Global mean sea level. • 0.26 to 0.55 m for RCP2.6, • 0.32 to 0.63 m for RCP4.5, • 0.33 to 0.63 m for RCP6.0, • 0.45 to 0.82 m for RCP8.5	• Potential increase in the current sea level by 2100	• A potential increase in globale sea level by a range of 0.26 ro 0.82m by 2100. Note that municipal projected sea level rise may vary from global estimates.

¹ IPCC, 2013: Climate Change 2013: The Physical Science Basis. Contribution of Working Group I to the Fifth Assessment Report of the Intergovern- mental Panel on Climate Change [Stocker, T.F., D. Qin, G.-K. Plattner, M. Tignor, S.K. Allen, J. Boschung, A. Nauels, Y. Xia, V. Bex and P.M. Midgley (eds.)]. Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA, p. 11.

Task 1.2. Collect and organize hazard information

This task involves gathering and analyzing hazard information to better understand the various natural hazards affecting the locality. It also involves an inventory of historical disasters to establish patterns of hazards in terms of its intensity and magnitude, including the scale of damages to property (i.e. agriculture, houses, socio-economic support infrastructure and utilities) and how it affected local communities (fatalities, injuries and number of severely affected families). At the end of this task, LGUs should be able to compile the necessary hazard maps, describe the hazard susceptibilities of barangays or specific areas within the city/municipality.

Sub-task 1.2.1 Gather hazard maps and characterize hazards

Gather available hazard maps from mandated agencies (refer to data sources of hazard maps). Hazard maps depict the spatial extent of hazards at different susceptibility levels and can also provide other technical information such as the magnitude/intensity, and in some cases, include information on the frequency or probability of the hazard occurrence. When analyzing hazards, the following descriptors should be discussed:

- a. **Spatial Extent** What areas/barangays within the municipality/city are likely to be inundated or affected by a particular hazard?
- b. **Magnitude/Intensity** What is the estimated strength of the hazard that will impact an area (i.e. Flood can be expressed in water depth, water flow velocity, and/or duration, storm surge expressed in wave heights, earthquake ground shaking expressed as intensity scale)?
- c. **Frequency** What is the estimated likelihood or the average recurrence interval (expressed in years) that a hazard event may happen?
- d. **Duration** How long will the hazard occur (expressed in seconds, minutes, days, weeks etc.)?
- e. **Predictability** Can human systems/technologies accurately determine when and where a hazard might occur including the estimated intensities?
- f. **Speed of Onset** Is the hazard slow/creeping (i.e. SLR, Drought) or rapid/fast (flashfloods, earthquakes, landslides)?

45

Table 3.1.7 Hazard maps and data sources

Hazard Maps	Source/s	Scale	Remarks
Flood Susceptibility	Mines and Geosciences Bureau	1:50,000	Depicts areas susceptible to floods, classified as high, moderate and low with supplemental information on flood heights. Available for selected regions, provinces and municipalities/cities. Map availability can be viewed through http://gdis.denr.gov.ph/mgbviewer/
	Philippine Atmospheric, Geophysical and Astronomical Services Administration (PAGASA), Office of Civil Defense (READY Project)	1:50,000, 1:10,000	Identifies areas prone to floods representing a worse case scenario. Selected provinces and municipalities/cities generated through the READY Project. Map availability can be viewed through http://www.ndrrmc.gov.ph/
	Department of Science and Technology- Nationwide Operational Assessment of Hazards Project (DOST-NOAH)	Various Map Scales	Flood hazard maps of selected areas within 18 major river basins. Provides flood inundation zones are based from 5, 10, 25, 50, and 100 year rainfall recurrence interval, with indicative flood heights. Map availability for selected areas can be verified through http://noah.dost.gov.ph/
Rain-Induced Landslide	Mines and Geosciences Bureau	1:50,000	Depicts areas susceptible to rain-induced landslide, classified as high, moderate and low. Available for selected regions, provinces and municipalities/cities. Availability can be viewed through http://gdis.denr.gov.ph/mgbviewer/
	Mines and Geosciences Bureau, Office of Civil Defense (READY Project)	1:50,000	Depicts areas susceptible to rain-induced landslide, classified as high, moderate and low. Available for selected provinces and municipalities/cities generated through the READY Project. Map availability can be viewed through http://www.ndrrmc.gov.ph/
Storm Surge	Philippine Atmospheric, Geophysical and Astronomical Services Administration (PAGASA), Office of Civil Defense (READY Project)	1:50,000	Depicts areas prone to storm surge. Available for selected provinces and municipalities/cities generated through the READY Project. Map availability can be viewed through http://www.ndrrmc.gov.ph/

Table 3.1.7 Hazard maps and data sources

Hazard Maps	Source/s	Scale	Remarks
Ground Rupture	Philippine Institute of Volcanology and Seismology (PHIVOLCS), Office of Civil Defense (READY	1:50,000	Depicts areas with known and inferred faults. Selected provinces and municipalities/cities generated through the READY Project. Map availability can be viewed through http:// www.ndrrmc.gov.ph/
	Project)	1:250,000	Regional Active Faults and Trenches Map. Depicts areas with known and inferred active faults and trenches. Map availability can be viewed at http://www.phivolcs.dost.gov.ph/
Ground Shaking	Philippine Institute of Volcanology and Seismology (PHIVOLCS), Office of Civil Defense (READY Project)	1:50,000	Composite ground shaking levels based on hypothetical maximum credible earthquake scenarios. Selected provinces and municipalities/cities generated through the READY Project. Map availability can be viewed at http://www.ndrrmc.gov.ph/ and http://www.phivolcs.dost.gov.ph/
		National Scale	Thenhaus Ground Shaking Maps of the Philippines. Estimated ground acceleration (g) for rock, hard, medium, and soft soils. Values expressed in g with a 90% probability of not being exceeded in 50 years. http://www.phivolcs.dost.gov.ph/
Liquefaction	Philippine Institute of Volcanology and Seismology (PHIVOLCS), Office of Civil Defense (READY Project)	1:50,000	Composite liquefaction susceptibility map based on hypothetical maximum credible earthquake scenarios. Selected provinces and municipalities/cities generated through the READY Project. Map availability can be viewed at http://www.ndrrmc.gov.ph/ and http://www.phivolcs.dost.gov.ph/
	Philippine Institute of Volcanology and Seismology (PHIVOLCS)	1:250,000	Indicative regional scale susceptibility map depicting areas prone to liquefaction. Map available can be viewed at http://www.phivolcs.dost.gov.ph/
Earthquake Induced Landslide	Philippine Institute of Volcanology and Seismology (PHIVOLCS), Office of Civil Defense (READY Project)	1:50,000	Composite earthquake induced landslide map based on hypothetical maximum credible earthquake scenarios. Selected provinces and municipalities/cities generated through the READY Project. Map availability can be viewed at http://www.ndrrmc.gov.ph/ and http://www.ndrrmc.gov.ph/

Table 3.1.7 Hazard maps and data sources

Hazard Maps	Source/s	Scale	Remarks
	Philippine Institute of Volcanology and Seismology (PHIVOLCS)	1:250,000	Indicative regional scale susceptibility map depicting areas prone to earthquake induced landslide. Levels of susceptibility expressed as the minimum critical acceleration to trigger landslide. Map availability can be viewed at http://www.phivolcs.dost.gov.ph/
Tsunami	Philippine Institute of Volcanology and Seismology	1:50,000	Areas depicting tsunami inundation zones with supplemental information on flood heights based modeling parameters (i.e. maximum credible earthquake magnitude and earthquake source). Available for selected Provinces. Map availability can be viewed at http://www.phivolcs.dost.gov.ph/
Volcanic Hazard Maps	Philippine Institute of Volcanology and Seismology (PHIVOLCS), Office of Civil Defense (READY Project)	1:50,000	Areas depicting volcanic associated hazards (i.e. lahar and pyroclastic flow). Available for selected active volcanoes, Map availability can be viewed at http://www.ndrrmc.gov.ph/ and http://www.phivolcs.dost.gov.ph/
	Philippine Institute of Volcanology and Seismology	Various Scales	Areas depicting volcanic associated hazards such as ash falls, pyroclastic flows, lava flows, lahar, tephra. Only available for selected active volcanoes. http://www.phivolcs.dost.gov.ph/

When gathering hazard maps refer to following:

- Gather maps from the mandated agencies. The LGUs should seek assistance from the mandated agencies and establish communication and procedures (protocol) for the request of available hazard maps or generation of municipal level hazard maps and national agencies to respond to such requests;
- In all cases, conduct ground truthing / validation should be conducted;
- Conduct community based hazard mapping, Document findings based on data, information and evidences gathered through consultations with local stakeholders and experts and reviewed by the mandated hazard mapping agencies;
- Obtain current local studies and materials (e.g. technical reports, maps) initially from the mandated
 agencies to build the information that identifies and characterize the hazards. Gain more
 understanding on the hazard information provided through opinions, interpretations and advice from
 experts of these agencies and seek their recommendations on the possible hazard mitigation
 strategies that can be implemented applicable in the area/locality;
- Participate in trainings and workshops by sending representatives from the planning group who will later relay the findings and learnings, and provide inputs into the risk assessment.

- Seek assistance from the climate change community of experts to provide an indication, and if
 possible, a localized formal assessment of future impact scenarios and if impacts can be more or less
 severe relative to current climate situation.
- Pursue special studies such as hazard analysis, delineation of flood outlines, and distribution of flood depth to reduce uncertainty in information and improve map accuracies.

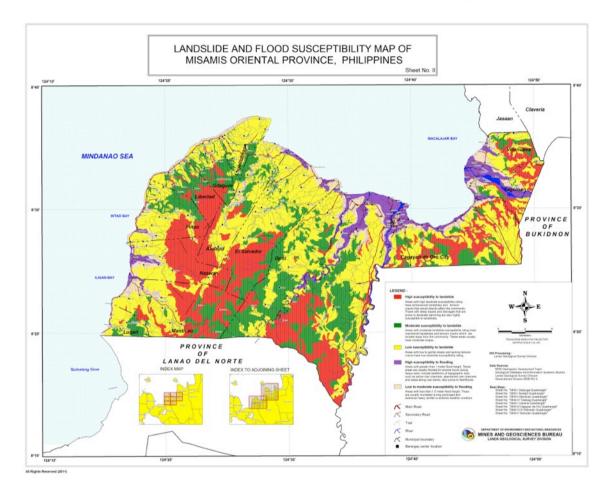


Figure 3.1.1 Sample Flood and Rain-Induced Landslide Hazard Map, MGB-Region 10, 2011

The Mines and Geosciences Bureau also generates flood hazard maps. These are usually available at 1:50,000 scale with selected areas at 1:10,000 scale. The map indicates areas where flood and landslides might occur categorized as high, moderate, and low with information of the technical description on flood heights (refer to Figure 3.1.1). These are based on field verification using geomorphological considerations, field surveys and interviews. The map however, does not indicate the antecedent rainfall can trigger floods and landslide which can be used to estimate the return periods/likelihood of occurrence of the hazard event. Establishing the likelihood of occurrence may require further verification, expert judgement and other anecdotal accounts.

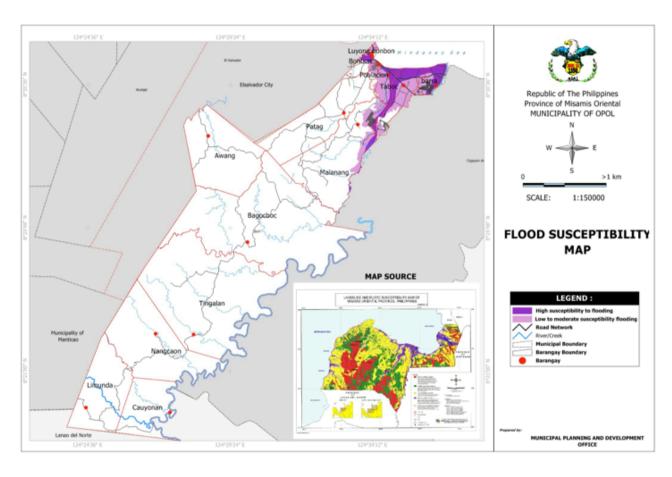


Figure 3.1.2 Flood susceptibility map of the Municipality of Opol, Misamis Oriental

Figure 3.1.2 shows an example of a flood hazard map obtained from MGB, Region 10. It shows the susceptibility or proneness to floods of barangays in the Municipality of Opol. From the figure, the following can be observed:

- Coastal and low-lying barangays of the Municipality which include Barra, Igpit, Malanang, Poblacion, Taboc, Bonbon and Luyong Bonbon are susceptible to flooding;
- Areas within the highly susceptible areas may experience flood heights equal or above one meter;
- Areas within the low to moderately susceptible areas may experience flood heights of less than one meter;
- Floods in the Municipality are mostly due to the overflowing of the Iponan River, Buncalalan Creek. Some portions of low lying coastal communities, wetlands and fish also experience coastal flooding as a result of inundation of sea water due to storms.

Sub-task 1.2.2 Prepare a summary hazard inventory matrix

Upon gathering the various hazard maps, prepare a matrix indicating the various information derived from the hazard maps. These can be complied and summarized using the sample table (refer to Table 3.1.8).

Table 3.1.8 Sample Inventory of Hazards and their description

	М	ap Informatio	on	Hazard Description				
Hazard	Source	Scale	Format/ Date/ Reference System	Susceptibly	Magnitude/ Intensity	Speed of Onset	Likelihood of Occurrence	Areas Covered
1	2	3	4	5	6	7	8	7
Flood	MGB	1:50,000	JPEG/2011/ UTM Zone 51, Luzon Datum	High	1 meter and above	Sudden	Floods triggered by 180mm one day rainfall with an estimated recurrence of 50-70 years	Taboc
				Moderate to Low	less than 1 meter		Floods may be triggered by >180mm one day rainfall with an estimated recurrence of >100 years	Luyong

Source: Adopted Mainstreaming Disaster Risk Reduction in Subnational Development and Land Use/Physical Planning in the Philippines, NEDA-UNDP-EU, 2008

Sub-Task 1.2.3. Analyze previous disasters

The analysis of past disaster events provide a better understanding of hazards specifically its pattern of occurrence, observed magnitude/intensity, and areas that are often affected. Historical disaster/damage data are available from the local Disaster Risk Reduction and Management Office and other provincial and regional sources (Office of Civil Defense, Provincial Disaster Risk Reduction and Management Office). At the minimum, disaster data should contain statistics on the date of occurrences of hazards by type, the affected areas indicated in a map, estimated casualties in terms of the number of fatalities, injuries and individuals missing, number of houses totally and partly damaged, estimated value of damages to property such as agriculture, private and commercial buildings and infrastructure (refer to Table 3.1.9).

	Source of Information		Disaster report	Disaster report	Disaster report	Disaster report
		Total	50,786,190	25,950	11,946,980	2,800,000
	llippine Pesos	Private/ Comm'l	5,810,000	0	2,500,000	1,700,000
	Damage to Properties in Philippine Pesos	Inst.	1,611,800	0	1,500,000	0
ag (1993-201	Damage to F	Agri	29,898,000 1,611,800	25,950	7,946,980	1,100,000
Records of Previous Disasters, Municipality of Bacuag (1993-2011)		Infra	13,466,390	0	0	0
rs, Munici	No. of houses Damaged	Partially	71	0	138	562
us Disaste	No. o	Totally	63	0	27	21
of Previo	of casualties (Number of Individt No. of Affected	Families	2,548	41	43	613
		Persons	12,948	167	155	3,065
Table 3.1.9.		Missing	0	0	0	0
<u> </u>	ties (Numbe	Injured	0	0	0	0
	of casualt	Dead	0	0	0	0
	Hazard Events and Affected Description Barangays		41	4	12	14
			2009 Tail end of the clod front July 11, 2009	Typhoon Ramon October 11, 2011	Typhoon Sendong December 2011	Typhoon Pablo Dec 3, 2012

Sub-Task 1.2.4. Prepare a hazard susceptibility inventory matrix

Based on the hazard maps, and climate change projections, prepare a hazard inventory matrix in order to describe the susceptibilities of the municipality/city for sudden and slow onset hazards. Hazard susceptibility attributed to climate change (i.e. sea-level rise), including past extreme weather events (drought) experienced by the municipality can also be included (refer to table 3.1.10).

Table 3.1.10 . Sample Hazard Susceptibility Inventory Matrix

Barangay	Flood	Rain-Induced landslide	Storm surge	Drought	Sea level Rise
Barra	V		√	√	V
Igpit	$\sqrt{}$	$\sqrt{}$	$\sqrt{}$	$\sqrt{}$	$\sqrt{}$
Taboc	$\sqrt{}$		$\sqrt{}$	$\sqrt{}$	$\sqrt{}$
Poblacion	$\sqrt{}$		$\sqrt{}$	$\sqrt{}$	$\sqrt{}$
Bonbon	$\sqrt{}$		$\sqrt{}$	$\sqrt{}$	$\sqrt{}$
Luyong Bonbon	$\sqrt{}$		$\sqrt{}$	$\sqrt{}$	$\sqrt{}$
Patag		$\sqrt{}$		$\sqrt{}$	
Malanang	$\sqrt{}$	$\sqrt{}$		$\sqrt{}$	
Awang		$\sqrt{}$		$\sqrt{}$	
Bagocbok		$\sqrt{}$		$\sqrt{}$	
Tingalan		$\sqrt{}$		$\sqrt{}$	
Nangcaon		$\sqrt{}$		$\sqrt{}$	
Cauyonan		$\sqrt{}$		$\sqrt{}$	
Limunda		$\sqrt{}$		$\sqrt{}$	

Source: Adopted from the Mainstreaming Disaster Risk Reduction and Climate Change Adaptation in the Comprehensive Land Use Plans Project Report, NEDA-UNDP-HLURB, 2012

Step 2. Scoping the potential impacts of disasters and climate change

Objectives:

Scope the potential impacts of climate change and hazards on relevant sectors;

Outputs:

- Summary of potential climate change impacts and potentially exposed units;
- Impact Chain Diagrams

Process:

Task 2.1Identify the various climate stimulus;

Task 2.2 Prepare sectoral impact chain diagrams;

Task 2.3 Summarize findings;

Adaptation to climate change and mitigation of risks to natural hazards involves a very broad range of measures directed at reducing vulnerability to a range of climatic stimulus (changes in means, variability, and extremes) and risks to sudden onset hazards. It is therefore important to first identify the potential impacts and the spatial manifestations of climate change. Impacts are used to refer to the effects on natural and human systems of physical events, of disasters, and of climate change¹⁰, which can be illustrated through impact chains. Climate impact chains are general cause-effect relations that describe how, in principle, climatic changes are expected to cause impacts on the sectors of concern¹¹.

This step summarizes the initial scoping of potential hazards, including the associated impacts of climate change and hazards, affecting the locality. These are based from the significant findings based on the initial information on climate change, compilation of hazard maps and historical damage/disaster reports.

Task 2.1. Identify the various climate stimulus

Based on the projected changes in the mean climate variables due to climate change identified in Step 1 (table 4.1.5), derive the relevant climatic stimuli that would likely affect the locality and key sectors. These are indicated in columns 4 and 5 of Table 4.2.1. Indicate key sectors likely to be affected to facilitate the identification of potential impacts using sectoral or multi-sectoral impact chains.

¹⁰ IPCC, Managing the Risks of Extreme Events and Disasters to Advance Climate Change Adaptation. A Special Report of Working Groups I and II of the Intergovernmental Panel on Climate Change, 2012

¹¹ National Economic Development Authority, Mainstreaming Disaster Risk Reduction in Subnational Development and Land Use/Physical Planning in the Philippines, 2008.

HLURB-CCC-UNDP-AusAID | PROJECT CLIMATE TWIN PHOENIX

Table 3.2.1. Summary of Projected Changes in Climate Variables and potential affected exposure unit/s, Municipality of Opol

	Infrastructure and Utilities	(6)		Yes			Yes	Yes
	Urban Use Areas	(8)	Yes	Yes	Yes	Yes	Yes	Yes
l Opol	Critical Point Facilities	(7)	Yes	Yes	Yes		Yes	Yes
e unit/s, iviunicipality o	Natural resource based production areas	(9)	Yes	Yes	Yes	Yes	Yes	Yes
iiai affected exposure	Population	(5)	Yes	Yes	Yes		Yes	Yes
iable 3.2. I. Summary of Projected Changes in Climate Variables and potential affected exposure units, Municipality of Opol	Information about patterns of change	(5)	 Slightly more warming in MAM, and in the JJA season 	Reduction in rainfall during the summer and habagat seasons in 2020 and 2050 Increase during amihan season, but amount of rain expected to be lesser than the habagat and transition seasons Reduction in rainall during the MAM and JJA months Wetter amihan months DJF and SON	Significant increase in the number of hot days expected in 2020 and 2050	There will be more days with rainfall (less days without rainfall compared to baseline)	More extreme daily rainfall expected (>150mm) in 2020 but more or less the same in 2050 compared to baseline.	A potential increase in globale sea level by a range of 0.2 ro 0.8.m by 2100. Note that municipal projected sea level rise may vary from global estimates.
ımmary or Projected Char	General Changes Expected in Climate Variables	(4)	Increasing in temperature for all seasons expected in 2020 and 2050	Increasing in rainfall during DJF for 2020 and 2050 Decreasing in rainfall during MAM for 2020 and 2050 Decreasing during JJA for 2020 and 2050 Increasing in rainfall during SON for 2020 but decreasing in 2050	 Increasing number of hot days (exceeding 35°C) 	Decreasing number of dry days (<2.5 mm of rain)	Heavy daily rainfall >150 mm increasing in 2020 and decreasing by 2050	 Potential increase in the current sea level by 2100
1able 3.2.1. St	Specific Change Expected and Reference Period	(3)	• 26.4°C by 2020 and 27.3°C by 2050 during DJF • 28.0°C by 2020 and 29.1°C by 2050 during MAM • 28.1°C by 2020 and 29.3°C by 2050 during JJA 2050 during JJA • 27.5°C by 2020 and 28.5°C by 2050 during JON	 462.86 by 2020 and 450.47°C by 2050 during DJF 265.22 by 2020 and 243.31 by 2050 during MAM 592.92 by 2020 and 597.9 by 2050 during JJA 597.95 by 2020 and 522.9 by 2050 during JSA 597.95 by 2020 and 522.9 by 2050 during SON 	 4,539 days exceeding 35°C in 2020 6,180 days exceeding 35°C in 2050 	• 6,413 days with <2.5 mm of rain in 2020 • 7,060 days with <2.5 mm of rain in 2050	 13 days with rainfall > 150 mm in 2020 9 days with rainfall > 150 mm in 2050 	Projected change by 2100 relative to 1986-2005 Global mean sea level. • 0.26 to 0.55 m for RCP2.6, • 0.32 to 0.63 m for RCP4.5, • 0.33 to 0.63 m for RCP8.5
	Observed Baseline (1971-2000)	(2)	• 25.4°C during the DJF • 26.8°C during MAM • 26.9°C during JJA • 26.5°C during SON	 442.5 during the DJF 296.0 during MAM 615.7 during JJA 581.1 during SON 	 383 days 	• 8,251 days	• 10 extreme rainfall events exceeding 150mm	
	Climate Variable	(E)	Temperature	Rainfall	Number of Hot days	Number of dry days	Extreme daily rainfall events	Sea level

Task 2.2 Prepare sectoral impact chain diagrams

Based on the identified climate stimuli (including its impacts to the behavior of natural hazards affecting the locality), identify the potential direct and in-direct impacts to the various thematic sectors such as agriculture, built-up/physical assets, water, health, coastal and forestry. LGUs can develop impacts chains by either focusing on one thematic sector or covering several sectors. Impact chains provide the most important chains of cause and effect leading to the potential impacts relevant in the planning area. This can help identify the key development areas/sectors where climate change and disasters will likely impact and guide the the detailed study of establishing the level of risks and vulnerabilities of the area.

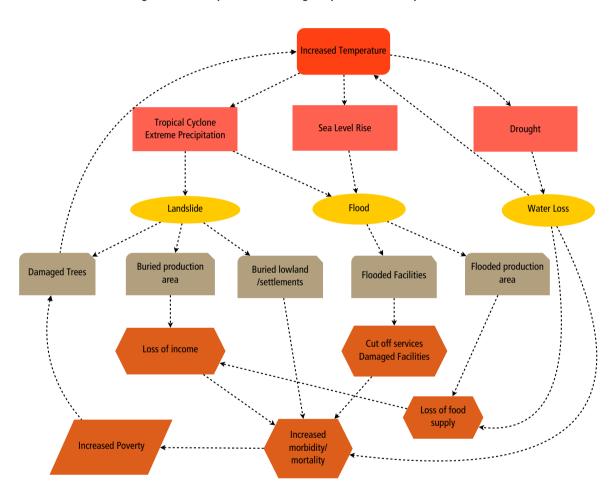


Figure 3.2.1 Sample Climate Change Impact Chain Multiple Sectors

Source: Mainstreaming CCA-DRR in the Comprehensive Land Use Plan, HLURB

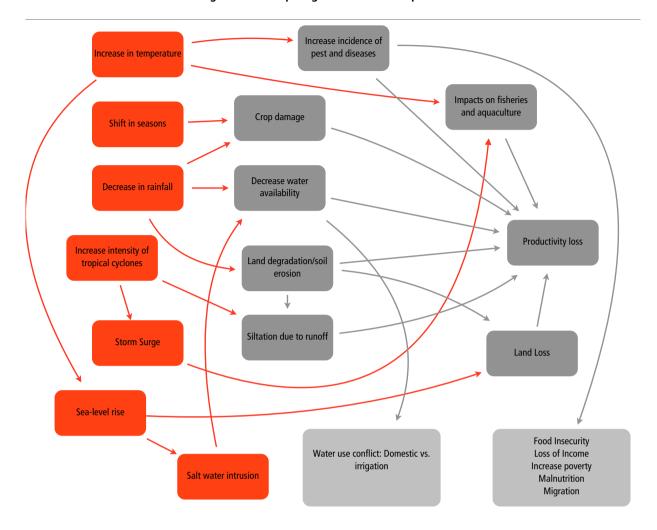


Figure 3.2.2 Sample Agriculture Sector Impact Chain

Source: Housing and Land Use Regulatory Board, Climate Change Commission, Manila Observatory, Deutsche Gesellschaft fur Internationale Zeusammenarbeit, CLUP Resource Book, Integrating Climate Change Adaptation and Disaster Risk Reduction and Management, 2012.

Task 2.3 Summarize findings;

List down identified potential impacts in Table 3.2.2. using the on the sectoral and multi-sectoral impact chain diagrams. At the end of this step, LGUs will have an initial understanding of the potential manifestations of climate change and the various direct and indirect impacts to the relevant land use planning sectors. This will also facilitate the identification of relevant sectors in the municipality which will be covered in the climate and disaster risk assessment.

Table 3.2.2 Summary of Climate change Impacts, Municipality of Opol

Potential Impact Area/s	(10)	• All brgyss	All brgyss	Identified brgys within flood prone areas Rain induced landslide prone areas Coastal areas	Coastal areas (within 1 meter above sea level or areas within 1 km. from the coastline.
Infrastructure and Utilities	(6)	Reduced water availability Reduced water recharge rates Potential changes in water quality Potential problems in water supply allocation for competing uses	None	Potential damages or disruption of key transportation infrastructure (bridges and roads) affecting area access and linkages Potential damage and disruption of distribution networks and services (i.e. power, water and communication)	Potential damages or disruption of key transportation infrastructure (bridges and roads) affecting area access and linkages along coastal areas Potential damage and disruption of distribution networks and services (i.e. power, water and communication) along coastal areas
Urban Use Areas	(8)	Reduced availability of potable water supply to sustain urban use areas	Increased temperatures in urban areas Increased energy consumption for cooling	Property damage Disruption of economic activities Reduction in overall economic outputs Reduced quality of life	Changes in high and low tide patterns where sea water may inundate further inland; Potential coastal erosion Potential increase in urban use area exposure to storm surges and coastal flooding including magnitude due to the potential increase in sea level; Salt water intrusion in coastal areas resulting to reduction in available potable ground water, Loss of available lands along the coastal areas; Sea water inundation within existing urban use areas along low-lying coastal areas. Sea water inundation di low-lying settlements to higher ground;
Critical Point Facilities	(2)	Reduced availability of potable water supply to sustain key services	Increased energy consumption for cooling for the provision of key services (i.e. hospitals, governance, schools etc.)	Possible damages or disruption to social support services/ facilities as a result of more frequent floods and landslides Potential reduction in available supply and quality delivery of social support facilities	Possible damages or disruption to existing social support social support services/facilities due to sea inundation
Natural resource based production areas	(9)	Reduced volume and quality of yields due to changes in seasonal patterns and reduction in the projected total annual accumulative rainfall; Reduced soil moisture (temperature with reduced rainfall).	Reduced crop yield, fisheries and livestock production due to heat stress Higher costs of inputs to sustain crop and livestock production Reduced food supply	More frequent flooding resulting to damage to crops Soil erosion and excessive run-off resulting to potential loss in soil fertility Reduced food supply	Intrusion of salt water into ricelands Reduced areas for crop production Reduced food supply Loss of coastal wetlands and other coastal habitats such as mangroves
Population	(2)	Potential reduction in available portable water which may impact quality of life and well-being.	More heat-related stress, particularly among the elderly, the poor, and vulnerable population; Increased energy consumption for cooling	possible deaths, injuries triggered by extreme rainfall events (i.e. floods, landslides) Increased poverty incidence due to loss of income and damaged dwelling units;	Potential increase in residential areas exposure to storm surges including magnitude due to the potential increase in sea level; Increased level of damages due to storm surges and coastal flooding
Information about patterns of change	(2)	Reduction in rainfall during the summer and habagat seasons in 2020 and 2050 Increase during amihan season, but amount of rain expected to be lesser than the habagat and transition seasons Reduction in rainall during the MAM and JJA months Wetter amihan months DJF and SON	Significant increase in the number of hot days expected in 2020 and 2050	More extreme daily rainfall expected (>150mm) in 2020 but more or less the same in 2050 compared to baseline.	A potential increase in globale sea level by a range of 0.26 ro 0.82m by 2100. Note that municipal projected sea level rise may vary from global estimates.
General Changes Expected in Climate Variables	(4)	Increasing in rainfall during DJF for 2020 and 2050 Decreasing in rainfall during MAM for 2020 and 2050 Decreasing during JJA for 2020 and 2050 Increasing in rainfall during SON for 2020 but decreasing in 2050	 Increasing number of hot days (exceeding 35°C) 	Heavy daily rainfall >150 mm increasing in 2020 and decreasing by 2050	Potential increase in the current sea level by 2100
Climate Variable	(1)	Rainfall	Number of Hot days	Extreme daily rainfall events	Sea level

Step 3. Exposure Database Development

Objectives:

- Prepare an exposure database that will contain baseline information on potentially affected elements covering population, urban use areas, natural resource production areas, critical point facilities and lifeline utilities/infrastructure;
- Describe the vulnerabilities/sensitivities of the elements using indicators
- Describe the adaptive capacities of elements using indicators;
- Provide the baseline information for the conduct of the Climate Change Vulnerability Assessment and Disaster Risk Assessment

Outputs:

- Exposure Maps (Population, Urban Use Areas, Natural Resource-based Production Areas, Critical Points, lifeline/infrastructure)
- Attribute information on exposure, sensitivity/adaptive capacity of the various exposure unts

Process:

Task 3.1 Prepare the Population exposure maps and compile information;

Task 3.2 Prepare urban use area exposure maps and compile exposure, sensitivity/adaptive capacity information;

Task 3.3 Prepare natural resource production area exposure maps and exposure, sensitivity/ adaptive capacity attribute information;

Task 3.4 Prepare critical point exposure maps and exposure, sensitivity/adaptive capacity attribute information;

Task 3.5 Prepare lifeline area exposure maps and compile attribute information;

The Exposure Database provides the baseline information pertaining to the elements at risk. It shall provide the location, vulnerability/sensitivity and adaptive capacity attributes of the exposed elements which are necessary information when conducting a climate change vulnerability assessment (CCVA) and climate and disaster risk assessment (CDRA). Ideally, the exposure database should be map based, indicating the approximate field location of the various elements and will be the bases in estimating the exposed elements expressed in terms of area, number and/or unit cost. Other area/element based information should also be gathered to establish the sensitivity/vulnerability and adaptive capacity of the exposed elements which will be the bases for estimating the level of risks and vulnerabilities.

Task 3.1. Prepare the population exposure maps and compile attribute information

Prepare a population exposure map by using the existing land use map. Extract all residential areas per barangay. At the minimum, data can be aggregated at the barangay level. It assumes that majority of the population resides and are located within residential areas. A sample population exposure map is presented below (refer to figure 3.3.1) and a sample attribute table (refer to table 3.3.1) containing the exposure, sensitivity/vulnerability and adaptive capacity indicators.

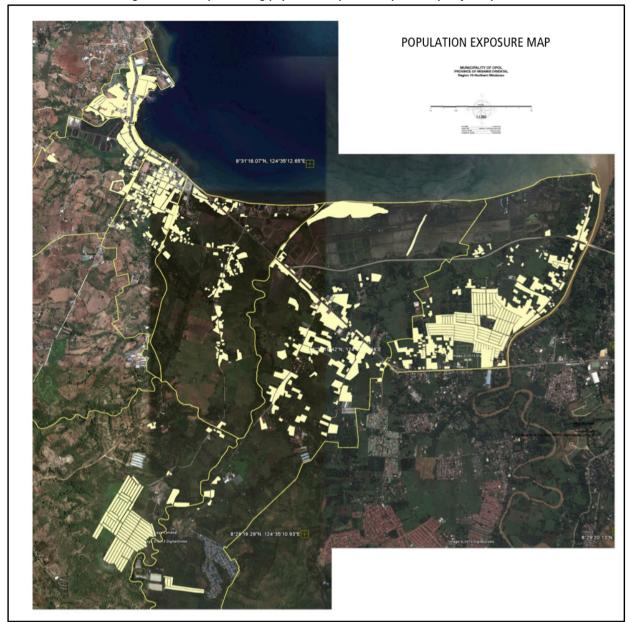


Figure 3.3.1 Sample Existing population exposure map, Municipality of Opol

Using the suggested indicators for exposure, sensitivity/vulnerability and adaptive capacity identified in Chapter 3 when assessing population vulnerability and risks, the Municipality of Opol derived barangay level data from their Community-based Monitoring System (CBMS) database, National Statistics Office Census (NSO) and focus group discussions with Municipal and Barangay Level sectoral representatives. A sample table on population exposure database for the municipality of Opol is presented in table 4.3.1.

Table 3.3.1 Sample Population Exposure Database

	Government Resources		Available government resources are not	enough to fund relocation of informal settlers in the short to medium term. No available resources	for infrastructure related hazard mitigation projects		
ACITY	Government Capacity to generate jobs		Current rate of ish	creation in the Municipality may not be enough to provide jobs to a significant portion of			
ADAPTIVE CAPACITY	Household financial capacities to relocate or retrofit		Families may have difficulties to relocate or retrofit given current	capacities within the short to medium. However, they are willing to pursue relocation/retrofitting if	provided external assistance from the local or national government		Population Density per Hectare of Residential Area = Barangay Population / Residential area in hectares. This will be used to compute for the estimated population exposure depending on the area (in hectares) affected/exposed.
	PhilHealth Coverage			Approximately 47% of the individuals have Philheath coverage.			population exp
	Access to post disaster financing			Approximately 60% of families have access to GSIS and SSS			for the estimated
	Percentage Malnourish ed Individuals	0.61	2.2	1.06	1.5	0.59	to compute
	Percentage of households living below the Poverty Threshold	14.55	35.86	27.16	21.29	31.29	is will be usec
BILITY	Percentage of persons with disabilities	0.7	1.01	0.7	2.23	0.89	ו hectares. Th
VULNERABILITY	Percentage of young and old dependents	33.58	34.31	36.3	32.24	35.67	idential area ir
	Percentage of Oppulation living in dwelling units with walls made from light to salvageable materials	0.84	5.06	1.75	6.08	8.74	opulation / Res
	Percentage Informal Settlers	1.06	3.13	7.27	4.06	4.45	= Barangay P
	Population Density per Hectare of Residential Area ¹	276	238	172	254	229	dential Area =
URE	Barangay Population	14334	2698	10123	3690	2918	ctare of Resided
EXPOSURE	Residential Area	51.94	11.34	58.72	14.53	12.75	ensity per He ectares) affec
	Barangay	Barra	Bonbon	lgpit	Poblacion	Тарос	¹ Population Density per Hectare of Resi the area (in hectares) affected/exposed

Task 3.2. Prepare the urban use area exposure map and attribute information

The urban use area exposure database will cover land uses such as commercial, residential, industrial, tourism, parks and recreation, cemetery and other urban uses unique in the locality (Note: Institutional uses will be covered in critical point facility exposure map).

Sub task 3.2.1 Prepare the urban use area exposure map

The exposure map can be prepared using the existing land use map by extracting the above mentioned urban use area categories. At the minimum, data should be aggregated per barangay per urban use area category (refer to figure 3.3.2 and table 3.3.2).

URBAN USE AREA EXPOSURE MAP 19.29"N, 124"35'10.93"E

Figure 3.3.2 Sample existing urban use areas exposure map, Municipality of Opol

	Local government capacity to impose/ implement zoning regulations		Majority of non-	structures can conform with added zoning	regulations in the medium	Majority of residential	may have difficulties	with added regulations	and may take them medium to long term.	
ALL CITY	Government Resources			Local government	very limited but funds for	can be sourced from	and national governments	public private partnerships.		
ADAPTIVE CAPACITY	Available alternative sites			Alternative	sites are still available	municipality which can	te existing land uses if			
AD	Insurance Coverage		Majority of non- residential	structures/ property owners	have current property insurance	coverage or have capacities to	purchase within the short term.	Majority of residential structures	do not have property insurances	
ele .	Capacity and willingness to retrofit or relocate or conform with new regulations		There is	willingness to relocate	assistance from the local	There is also willingness to	existing highly vulnerable	may take them medium to	long-term.	
Attribute Tak	No access/ area coverage to infrastructure related hazard mitigation measures	Very High	Very High	Very High	Very High	Very High	Very High	Very High	Very High	Very High
3.3.2 Sample Urban Use Area Exposure Attribute Table SENSITIVITY	Structure not employing hazard resistant building design	Moderate	Moderate	Low	Moderate	Very High	Moderate	Moderate	Very High	High
e Urban Use Area E SENSITIVITY	Proportion of Buildings in dilapidated/ condemned Condition	Moderate	Low	Low	Moderate	Residual	Low	Very Low	High	Moderate
9.3.2 Sample	Proportion of buildings with walls with light to salvageable materials	Moderate	Moderate	Low	High	Residual	Low	Very Low	Very High	High
Table	Replacement Cost (PHP per Sq. Meter)	8,672	1,000	3,254	5,400	1,500	8,672	8,672	3,543	5,400
ı	Total Area Allocation per Land Use Per Barangay	0.08	0.03	0.05	11.34	1.27	4.22	5.3	9.48	35.84
EXPOSURE	Existing Land Use (Specific Use)	Commercial	Infrastructure and Utilities - Transmitter	Parks and Play Ground	Residential	Cemetery	Commercial	Light Industries	Residential - Informal Settlement	Residential
	Barangay	Bonbon	Bonbon	Bonbon	Bonbon	lgpit	lgpit	lgpit	lgpit	lgpit

 1 Very High = >50%, High >30-50%, Moderate >15-30%, Low >5-15%, Very Low >2-5%, Residual 0-2%

Sub-task 3.2.2 Gather indicators related to vulnerability/sensitivity and adaptive capacity of urban use areas

At the minimum, exposure will be expressed in terms of hectares. If data is available, exposure can be further described in terms of replacement value (expressed as the unit cost of replacement per square meter) or assessed value. Vulnerability/sensitivity indicators can be aggregated at the barangay level per urban use category Vulnerability/sensitivity, and adaptive capacity indicators can be expressed quantitatively as proportion or number. However, proportions can be described qualitatively using percentage range (refer to the recommended range and qualitative description). Given that data are aggregated at the barangay level, it assumes that these indicators are evenly distributed within particular land use category per barangay which may not necessarily reflect the actual site conditions.

Task 3.3 Prepare the natural resource production areas exposure maps and compile attribute information

Natural resource production areas refer to areas used for agricultural, fisheries and forestry based production. These shall cover areas such as croplands, livestock production areas, fishery areas, production forests, and other resource production areas unique to the locality.

Sub-task 3.3.1 Prepare a natural resource production areas exposure map

Natural resource-based production exposure map can derived from the the existing land use map of locality. These can be done through field surveys or barangay level land use mapping. The exposure map covers crop production areas, fishery areas, production forests and other natural resource production areas unique to the locality. At the minimum, these can be aggregated to the barangay level to account for the differences in the vulnerability/sensitivity and adaptive capacity indicators per barangay (please refer to figure 3.3.3 and table 3.3.3).

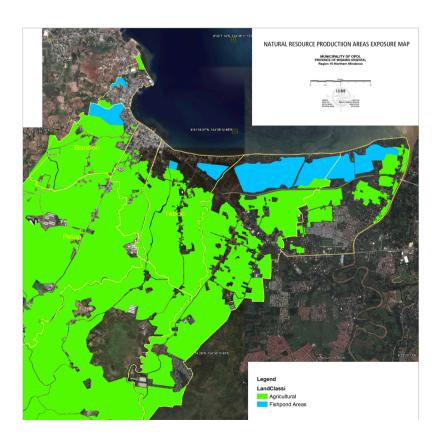


Figure 3.3.3 Sample existing natural resource-based exposure map, Municipality of Opol

Table 3.3.3 Sample Natural Resource Production Area Exposure Attributes

	Government Resources			olde licy	government resources are not	fund fund infrastructur e related	מון		
ЛТY	Alternative Livelihood		Only 15% of	farming families have access to	alternative livelihood opportunitie s. Current	rate of job creation in the LGU is not enough	to provide adequate opportunitie s to farming	communities	
ADAPTIVE CAPACITY	Early Warning Systems		Approximate ly 37% of	farming families have acccess to early	warning systems (EWS) related to	agricultural production. However, EWS can be	further improved to cover the remaining	farming communities	
ADA	Agricultural Extension Services of the Local Governmen t		Only 37% of the farming	have access to agricultural	services of the local government.	LGU has the capacity to develop and	programs on extension to cover the	farming families	
	Access to Insurance			Approximate ly 15% of farming families can	afford crop insurance. Cost sharing to cover key	production areas with crop insurance	can be pursued by the Local Government		
	% Areas with Water Impoundme nt	%0	%0	%0	%0	70%	70%	%0	%0
	% Areas with Irrigation Coverage	%0	100%	%0	100%	40%	100%	36%	25%
IIVITY	Number of production areas with infrastructur e coverage	NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE
SENSITIVITY	Number of Famers with access to hazard information	27%	27%	100%	100%	70%	70%	35%	100%
	Proportion of Farming Families using sustainable production techniques	%0	%0	%0	%0	4%	%0	2%	%0
	Number of Farming Families who attended climate field school	NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE
	Average output per hectare (PHP)	150,000	32,843	91,605	32,843	91,605	32,843	91,605	91,605
	Dominant Crop/ Variety of Produce	Vegetable	Tilapia/Bangus	Rice	Tilapia/Bangus	Rice	Tilapia/Bangus	Rice	Rice
EXPOSURE	Total Area Allocation (Hectares)	58.66	30.67	108.93	13.56	281.75	64.32	1750.28	53.26
	Number of Farming Dependent Households	127	10	18	4	123	14	657	20
	Barangay	Barra	Barra	Bonbon	Bonbon	lgpit	lgpit	Malanang	Poblacion

Sub-task 3.3.2 Gather indicators related to vulnerability/sensitivity and adaptive capacity

At the minimum, exposure will be expressed in terms of hectares. However, if data is available, exposure can be further expressed in terms of replacement value (cost for replanting per hectare). Vulnerability/sensitivity, and adaptive capacity can be expressed quantitatively in terms of proportion or number or qualitatively described as a range. At the minimum, vulnerability/sensitivity indicators should be aggregated at the barangay level per land use category.

Task 3.4 Prepare Critical Facilities Exposure map and compile attribute information

Critical point facilities will cover the various critical point facilities associated with the delivery of basic social services such as (hospitals, schools, social welfare facilities, government buildings, protective services) and other point facilities associated with water, power, communication, bridges, evacuation centers, seaports, airports, food storage facilities, other unique critical point facilities in the locality. This will also cover the major access and distribution networks (i.e. such as roads; and water, electricity and communication networks). Two exposure maps will be prepared maps namely critical point facilities and lifeline utilities.

Sub-task 3.4.1 Prepare Critical Point Facilities Exposure map

The critical exposure map can be prepared using available inventory/thematic maps generated by the locality. These can be compiled into one map where the spatial distribution of the facilities by type are indicated (refer to figure 3.3.4). Sample thematic maps that can be used to prepare the exposure database on critical point facilities include inventory of schools, health related facilities, social welfare facilities, government buildings (i.e. Barangay halls, municipal/city hall,), water related point facilities (i.e. pumping stations, potable water point sources), power related point facilities (sub-stations, power plants, etc), communication facilities (cell sites/towers), transportation (sea ports, airports, bridges) and recreation buildings facilities (gymnasiums, covered courts).

Sub-task 3.4.2 Gather indicators related to exposure, vulnerability/sensitivity and adaptive capacity

Exposure will be expressed in terms of capacity (i.e number of classrooms, bed capacity), area allocation (expressed in terms of hectares or floor area), construction cost (total cost of the structure) and/or replacement value per square meter floor area where the total replacement cost can be derived based on the total floor area of the structure. Vulnerability/sensitivity attributes are determined on a per structure basis for critical point facilities (refer to table 3.3.4).

CRITICAL POINT FACILITIES EXPOSURE MAP MUNICIPALITY OF OPOL PROVINCE OF MISAMIS ORIENTAL Region 10-Northern Mindanao 1:5,000 8"31"18.07"N, 124"35"12.65"E

Figure 3.3.4 Sample existing Critical Point Facilities exposure map, Municipality of Opol

Table 3.3.4 Sample Critical Point Facilities Exposure Attribute Table

ADAPTIVE CAPACITY	Local Government Resources for risk mitigation		For LGU owned buildings, the LGU does not have	available resources for retrofitting and relocation. However, funds can be	set aside for such purposes but it may significantly affect the	implementation of other local development programs and projects.	Majority of the schools are either privately owned or managed by the	Regional DepEd. Funds for planned adaptation (i.e. retrofitting and	relocation) can be coursed through the regional agencies with possible	counterpart funding from the LGU. Existing Bridges are mainly under the	jurisdiction of the DPWH, retrofitting or establishment of new	bridges may be coursed through DPWH.
ADAPTIN	Insurance Coverage				Majority of the exposed critical	points (i.e. schools, rural heath units, barangay health	centers and local governance	covered by property damage insurance. Only the Barra day	care centers (1 and 2) are covered with	insurance.		
	Structure Employing Hazard Resistant Design	Yes	Yes	Yes	No	No	No	No	No	No	Yes	Yes
SENSITIVITY	Existing	poog	poog	poog	poog	Poor/needs major repair	needs repair	Poor/needs major repair	needs repair	Poor	poog	needs repair
	Wall Materials Used	Concrete	Concrete	Concrete	Concrete	Mixed	Wood	Mixed	Concrete	Wood	Mixed	Concrete
	Capacity (Classrooms, Bed Capacity, Loading Capacity)	20 Tons			15 Classrooms		6 Classrooms		8 Classrooms	4 Bed Capacity	6 Classrooms	12 Classrooms
	Area		50 sq meters	50 sq meters	6404 sq. meters	50 sq meters	10000 sq meters	50 sq meters	4845 sq. meters	75 sq. meters	9879 sq. meters	8034 sq. meters
EXPOSURE	Name	Barra Bridge	Barra Day Care Center 2	Barra Day Care Center	barra Elementary School	Luyong Bonbon Day Care Center	Opol Grace Christian School	Bonbon Senior Citizen	Luyong Bonbon Elementary School	Luyong Bonbon Health Center	Opol Central School	SDA Elementary School
	Type	Bridge	Day Care Center	Day Care Center	Elementary School	Day Care Center	Elementary School	Senior Citizen Building	Elementary School	Health Center	Elementary School	Elementary School
	Barangay	Вагга	Barra	Barra	Barra	Bonbon	Bonbon	Bonbon	Luyong Bonbon	Luyong Bonbon	Poblacion	Poblacion

Task 3.4.3 Prepare Lifeline Utilities Exposure map and compile attribute information

Lifeline facilities refer to major linkage and distribution systems associated with transportation access systems and power, water and communication distribution/line systems. At the minimum, LGUs can focus on roads linking the municipality/city to other important nodes within the Province/Region, linkage systems within major functional areas within the city/municipality and those, major water, power and communication distribution networks.

Sub-task 3.4.4 Prepare a lifeline utilities exposure map

An exposure map for lifeline utilities can be derived from existing road, power, water and communication inventory maps available in the municipality and city. These can also be prepared through GPS assisted surveys and deriving secondary data from provincial and regional level agencies (refer to figure 3.3.5).

Sub-task 3.5.2 Gather indicators related to vulnerability/sensitivity and adaptive capacity

Information on vulnerability/sensitivity and adaptive capacity can be compiled using existing inventory tables prepared in socio-economic profiling. However, supplemental information should also gathered such as replacement cost (average cost per linear kilometer), hazard design standards, and other anecdotal accounts to describe the adaptive capacity of the locality (i.e. presence of alternative routes/back up systems, available government resources for the establishment and retrofitting of the various lifelines (refer to table 3.3.5).

Figure 3.3.5 Sample existing lifeline utilities exposure map, Municipality of Opol

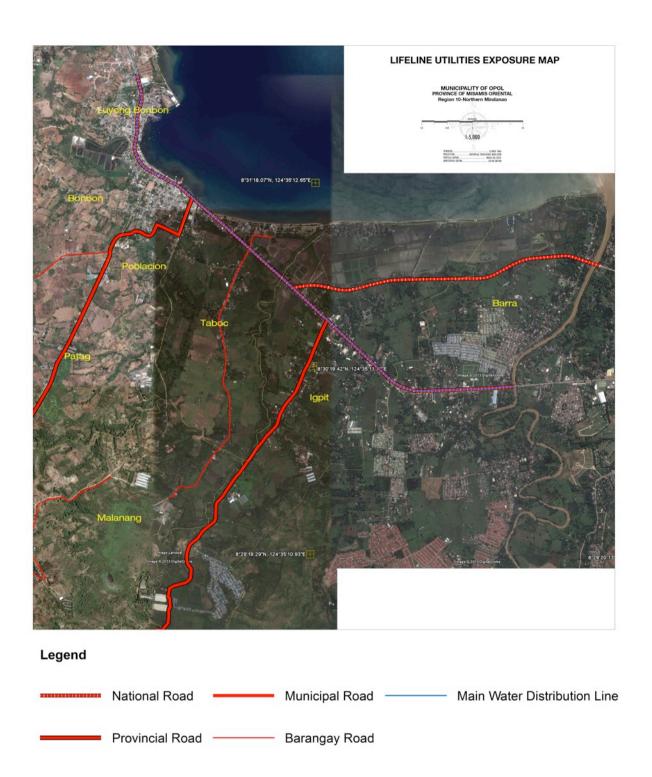


Table 3.3.5 Sample Lifeline Utilities Exposure Attribute Table

EXPOSURE	ш			SENSITIVITY		ADAP	ADAPTIVE CAPACITY
	Road Classification	Replacement Cost per linear kilometer	Surface Type	Existing Condition	Hazard Resistant Design	Insurance Coverage	Available Government Resources
	National road	23,000,000	Concrete	рооб	Yes		
	Water Pipe	No Information	Steel	Pood	Yes		
	National road	23,000,000	Concrete	Pood	Yes		Local Government do not have
	Provincial road	18,000,000	Concrete/Gravel	Needs Major Repairs	ON N	All existing roads do	improvements, and or establishment of new roads
	Provincial road	18,000,000	Concrete	Needs Major Repairs	No	not nave damage insurance coverage . Addressing damages	(barangay and municipal).Regional DPWH, however, have available financial
	Provincial road	18,000,000	Concrete	Good	Yes	are mostly done through repairs using either local	resources to fund national road improvements or retrofitting within the Municipality but fund
	Barangay Road	11,036,000	Concrete	Good	Yes	government fund resources or those funded by regional line	availability will depend on their current priorities. Also, LGU can impose special lew taxes for
	Barangay Road	11,036,000	Concrete	Good	Yes	agencies.	projects benefiting its local constituents but local capacities
	Barangay Road	11,036,000	Concrete	Good	o N		may not be able to pay trie additional taxes.
	National road	23,000,000	Concrete	Good	Yes		
	Barangay Road	11,036,000	Dirt Road	Poor	N O		

Step 4. Conduct a Climate Change Vulnerability assessment (CCVA)

Objectives:

- Determine exposed elements to the various climate stimuli
- Analyze and determine sensitivities
- Identify potential impacts of climate change to the system
- Analyze adaptive capacities
- Determine level of vulnerabilities
- Identify land use planning decision sectors and/or areas

Outputs:

- CCVA summary decision areas and issues matrix
- CCVA vulnerability assessment map

Process:

Task 4.1 Identify the system of interest, climate stimuli, and impact area

Task 4.2 Determine Exposed Units

Task 4.3 Conduct a sensitivity analysis

Task 4.4 Enumerate the potential impacts and rate the degree of impact

Task 4.5 Evaluate and rate the adaptive capacity

Task 4.6. Compute for the vulnerability index

Task 4.7 Prepare a vulnerability assessment map

Task 4.8 Identify decision areas issues matrix

The Climate Change Vulnerability Assessment (CCVA) is a tool which assesses the vulnerabilities of the locality to the various climate related stimuli. The tool is qualitative in approach in order to determine the level of vulnerability, determine the underlying factors contributing to vulnerability by determining the extent of exposure, analyzing sensitivities and adaptive capacities. This will facilitate the identification of decision areas, planning implications and policy interventions.

Task 4.1. Select a climate stimuli, system of interest, and determine the impact area

Based on the initial scoping step 2 and taking off from the summary matrix , select and list down the various climate stimulus in column 1 (refer to Table 3.4.1 Sample Impact Area and Climate Stimuli). Determine the estimated impact area where the climate stimuli will manifest (column 2). Impact area can be mapped to represent the area coverage to facilitate the identification of potentially affected areas. Impact area can represent as a particular area such as those within the 1-meter of the current mean sea level to represent sea level rise impact area or impacts may cover the whole municipality (i.e. changes in the rainfall pattern, changes in temperature, increase in the number of dry days). List down the potential systems of interest which will be assessed.

Table 3.4.1 Sample Impact Area and Climate Stimuli

Climate Stimuli	Impact area	System/s of Interest
(1)	(2)	(3)
Potential 0.82 using the RCP 8.5 increase in the current mean sea level by 21001	Coastal areas 1 meter above the mean sea level	. ,

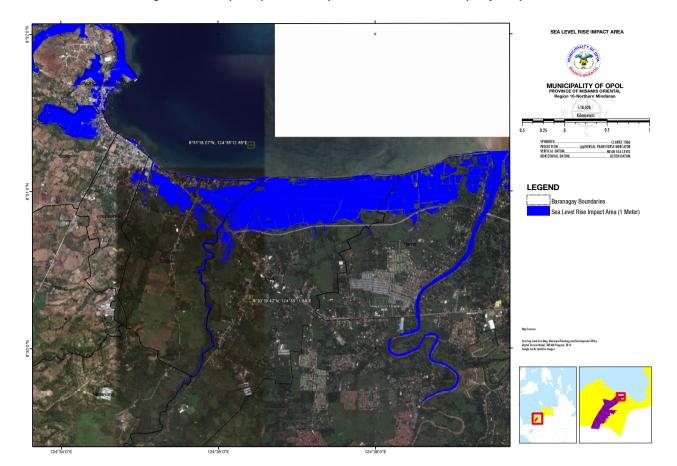


Figure 3.4.1 Sample Impact Area Map for Sea Level Rise, Municipality of Opol

Task 4.2. Determine the exposed units

The exposure database serves as source of information on exposure which includes the location and attributes of the system of interest. Exposure data gathered in step 3 serves as the baseline information to describe elements in the impact area. Based on the overly of the exposure maps and the impact area, identify the exposed elements for each system of interest.

Sub task 4.2.1. Determine Population Exposure

Overlay the population exposure map with the impact area map (refer to figure 3.4.2a). The map overlying will determine the extent of area exposed where the number of exposed individuals can be computed, including the sensitivity and adaptive capacity attributes of the elements exposed. Determining exposure can be facilitated using GIS or overlay mapping using paper maps and transparencies including the sensitivity and adaptive capacity attributes of the elements exposed (refer to table 3.4.2a).

- Compute for the residential area to population density by dividing the barangay population with the total estimated residential areas (Column D)
- Estimate the affected area using GIS (Column E)
- Compute for the affected population by multiplying the the estimated affected area by the residential area to population density (Column F).
- Determine the exposure percentage of affected population relative to the total baranagay population by dividing the affected population and the total barangay population (Column G)
- A sample computation of exposure is presented below (refer to table 3.4.2a).
- Note: Columns H-M are the gathered sensitivity indicators in the exposure database.

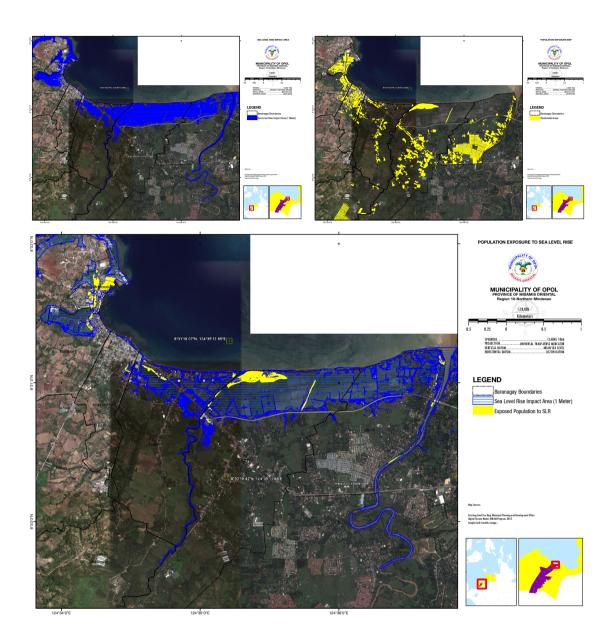


Figure 3.4.2a Sample Population Exposure to Sea Level Rise, Municipality of Opol

Table 3.4.2a Sample Population Exposure Estimation

Residential Population Area Exposure Percentage Percentage	a	U	D EXPOSURE	ш		o	=	-	SENSITIVITY	K	-	Σ
B/C D x E I/E 1/E 1.06% 0.84% 33.58% 0.70% 14.55% 265.19 0.99 263 8.73% 3.13% 5.06% 34.31% 1.01% 35.86% 163.98 7.29 1,195 12.42% 7.27% 1.75% 36.30% 0.70% 27.16% 279.58 5.25 1,468 38.95% 2.00% 8.55% 35.43% 0.40% 41.51% 231.84 0.36 83 2.48% 4.06% 6.08% 32.24% 2.23% 21.30% 224.92 0.93 2.09 7.29% 4.45% 8.74% 35.67% 0.89% 31.29%	Estim Barangay Reside Population Are (Hecta	ated ential ea ares)	Residential Area to Population Density (Persons/ Hectare) ¹	Affected Area (Hectares	Exposed Population 3	Exposure	Percentage of Informal Settlers		Percentage of young and old dependents		Percentage of Individuals living below the Poverty Threshold	Percentage of Malnourishe d Individuals
251.06 0.54 136 1.04% 1.06% 0.84% 33.58% 0.70% 14.55% 265.19 0.99 263 8.73% 3.13% 5.06% 34.31% 1.01% 35.86% 163.98 7.29 1,195 12.42% 7.27% 1.75% 36.30% 0.70% 27.16% 279.58 5.25 1,468 38.95% 2.00% 8.55% 35.43% 0.40% 41.51% 231.84 0.36 83 2.48% 4.06% 6.08% 32.24% 2.23% 21.30% 224.92 0.93 209 7.29% 4.45% 8.74% 35.67% 0.89% 31.29%			B/C		DxE	I/E						
265.19 0.99 263 8.73% 3.13% 5.06% 34.31% 1.01% 35.86% 163.98 7.29 1,195 12.42% 7.27% 1.75% 36.30% 0.70% 27.16% 279.58 5.25 1,468 38.95% 2.00% 8.55% 35.43% 0.40% 41.51% 231.84 0.36 83 2.48% 4.06% 6.08% 32.24% 2.23% 21.30% 224.92 0.93 209 7.29% 4.45% 8.74% 35.67% 0.89% 31.29%	13,040	51.94			136		1.06%			0.70%		0.61%
163.98 7.29 1,195 12.42% 7.27% 1.75% 36.30% 0.70% 27.16% 279.58 5.25 1,468 38.95% 2.00% 8.55% 35.43% 0.40% 41.51% 231.84 0.36 83 2.48% 4.06% 6.08% 32.24% 2.23% 21.30% 224.92 0.93 209 7.29% 4.45% 8.74% 35.67% 0.89% 31.29%	3,008	11.34					3.13%			1.01%		2.20%
279.58 5.25 1,468 38.95% 2.00% 8.55% 35.43% 0.40% 41.51% 231.84 0.36 83 2.48% 4.06% 6.08% 32.24% 2.23% 21.30% 224.92 0.93 2.09 7.29% 4.45% 8.74% 35.67% 0.89% 31.29%	9,628	58.72					7.27%				27.16%	1.06%
231.84 0.36 83 2.48% 4.06% 6.08% 32.24% 2.23% 21.30% 224.92 0.93 209 7.29% 4.45% 8.74% 35.67% 0.89% 31.29%	3,768	13.48					2.00%				41.51%	1.80%
224.92 0.93 209 7.29% 4.45% 8.74% 35.67% 0.89% 31.29%	3,369	14.53					4.06%			2.23%	21.30%	1.50%
	2,868	12.75					4.45%			0.89%	31.29%	0.59%

¹Residential Area Population Density derived by dividing the estimated population and residential areas.
² Estimated exposed areas expressed in hectares are GIS derived.
³ Estimated affected population derived from multiplying the exposed areas by the estimated Residential area to population Density.
⁴ Exposure percentage derived by dividing the estimated exposed population to the barangay population

75

Sub task 4.2.2. Determine Natural Resource-based Production Area Exposure

Similar to population exposure, overlay the natural resource production area exposure map prepared in Step 3 (exposure database) with the impact area (refer to figure 3.4.2b). The impact area map will be used to determine the extent of area exposed by type of natural resource production area per barangay. Based on the map overlying, the estimated exposed elements can be computed and summarized, including the sensitivity and adaptive capacity attributes of the elements exposed (refer to table 3.4.2b). Proceed and compute for the estimated affected area and value, including the exposure percentage:

- Estimate the exposed natural resource-based production areas per barangay in hectares (Column D).
- Determine the exposure percentage of exposed natural resource production area relative to the total area allocation by dividing the exposed area and the barangay allocation by dominant crop (Column E).
- Compute for the exposed value by multiplying the the estimated flooded area by the estimated average annual output per hectare (Column G).
- Note: Columns H-M are the gathered sensitivity indicators in the exposure database.
- Sample computation is presented below (refer to table 3.4.2b).

Figure 3.4.2b Sample Natural resource based production area exposure map to Sea Level Rise, Municipality of Opol

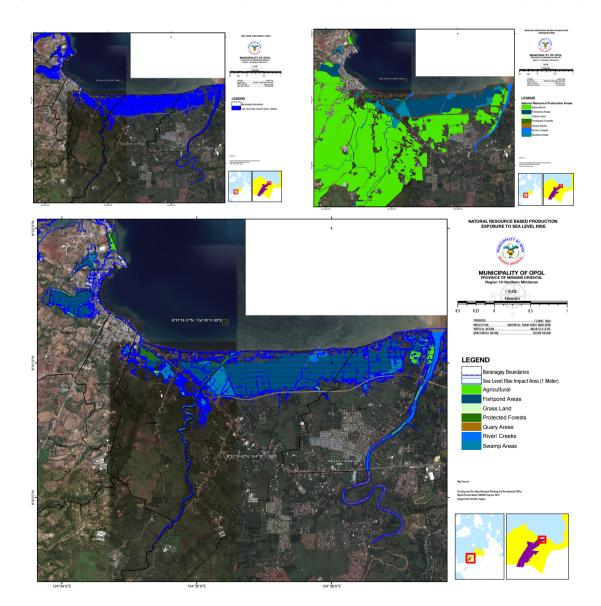


Table 3.4.2b Sample Natural Resource Production Area Exposure Table

∢	8	v	۵	ш	- ш	ی	Ŧ	-	_	¥	-	Σ
		۵	EXPOSURE						SENSI	SENSITIVITY		
Barangay	Area by Dominant Crop (Hectares)	Dominant Crop	Exposed Area¹ (Hectares)	Exposure Percentage ²	Average potential income per hectare per year (PHP)	Exposed Value (Php) ³	Number of Farming Families who attended climate field school	Proportion of Farming Families using sustainable production techniques	Number of Famers with access to hazard information	Number of production areas with infrastructure coverage	% Areas with Irrigation Coverage	% Areas with Water Impoundment
				D/B		FxD						
Barra	58.66	Vegetable	98.9	11.73%	150,000.00	1,032,000	NONE	%0	27%	NONE	%0	%0
Bonbon	108.93	Rice	0.93	0.85%	91,605.00	85,193	NONE	%0	100%	NONE	%0	%0
lgpit	281.75	Rice	1.51	0.54%	91,605.00	138,324	NONE	4%	70%	NONE	40%	20%
Luyong Bonbon	3.75	Corn	1.63	43.47%	70,200.00	114,426	NONE	%0	35%	NONE	%0	%0
Malanang	1,750.28	Rice	0.18	0.01%	91,605.00	16,489	NONE	7%	35%	NONE	36%	%0
Taboc	149.28	Rice	2.31	1.55%	91,605.00	211,608	NONE	15%	35%	NONE	35%	30%
Barra	30.67	Tilapia/Bangus	25.90	84.45%	32,843	850,634	NONE	%0	27%	NONE	100%	%0
Bonbon	13.56	Tilapia/Bangus	12.91	95.21%	32,843	424,003	NONE	%0	100%	NONE	100%	%0
lgpit	64.32	Tilapia/Bangus	61.35	95.38%	32,843	2,014,918	NONE	%0	20%	NONE	100%	20%
Luyong Bonbon	2.46	Tilapia/Bangus	2.13	86.59%	32,843	956'69	NONE	%0	35%	NONE	100%	%0
Тарос	9.40	Tilapia/Bangus	8.47	90.11%	32,843	278,180	NONE	%0	35%	NONE	100%	30%
1 [-+:	ordar boson	Louise DID at the latter and board and the old will be and any or account by the desired to	o Poored Son	0 1 10 100 0	70,000							

¹ Estimated exposed areas expressed in hectares based on overlay is GIS derived ² Exposure percentage derived by dividing the affected area by the total barangay allocation ³ Estimated affected value derived by multiplying average output per hectare with the affected area.

Sub task 4.2.3. Determine Urban Use Area Exposure

Overlay the urban use area exposure map prepared in Step 3 with the impact area map to determine the extent of area exposure by type of land use category (refer to figure 3.4.2c). Based on the map overlying, the estimated exposed area can be determined including other exposure statistics and summarized, including the sensitivity and adaptive capacity attributes of the elements exposed (refer to table 3.4.2c).

Proceed and compute for the estimated exposed area and value, including the exposure percentage:

- Estimate exposed area per urban use area per barangay in hectares (Column D);
- Determine the exposure percentage of affected urban use area relative to the total baranagay allocation by dividing the affected population and the total barangay population (Column E);
- Compute for the exposed value by multiplying the the estimated flooded area by the estimated replacement cost per square meter multiplied by 10,000 (Column G);
- Note: Columns H-K are the gathered sensitivity indicators in the exposure database.
- Sample computation is presented below (refer to table 3.4.2c)

Figure 3.4.2c Sample urban use area exposure map to Sea Level Rise, Municipality of Opol

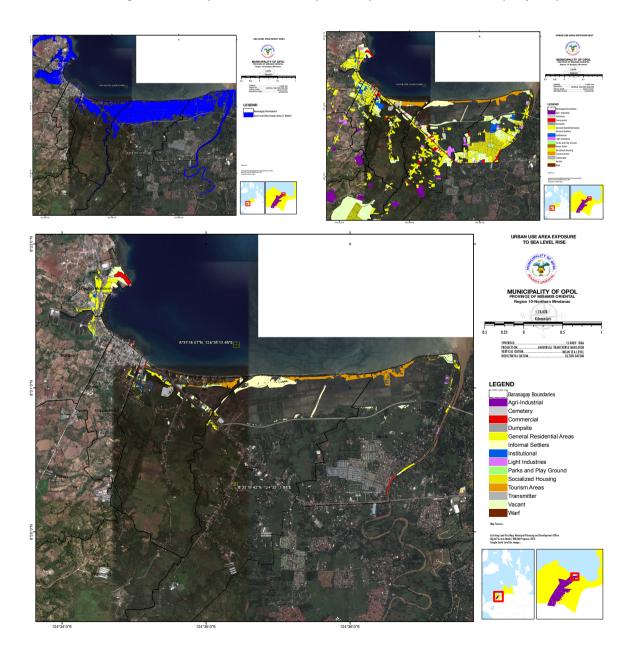


Table 3.4.2c Sample Urban Use Area Exposure Table, Municipality of Opol

٨	~	ر			1 030 USG	'alcode	F F G H G H G G H G H G H G H G H G H G	_	l	×
			EXPOSURE					SENSI	SENSITIVITY	
Barangay	Existing Land Use (Specific Use)	Area per land use Category in Hectares	Exposed Area in Hectares ¹	% Exposure ²	Replacement Cost per Sq. Meter(PHP)	Exposed Value (PHP) ³	Proportion of buildings with walls with light to salvageable materials	Proportion of Buildings in dilapidated/condemned	Structure Employing Hazard Resistant/ Adaptation Design	No access/area coverage to infrastructure related hazard mitigation measures
				D/C		D x 10000 x F				
lgpit	Residential - Informal Settlements	9.48	9.29	%86	3,543	3,543 329,027,781	Very High	High	Very High	Very High
Luyong Bonbon	Residential - Informal Settlements	0.63	0.55	%88	3,543	19,660,107	Very High	High	Very High	Very High
Poblacion	Residential - Informal Settlements	0.15	0.15	%86	3,543	5,186,952	Very High	High	High	Very High
Taboc	Residential - Informal Settlements	0.20	0.20	100%	3,543	7,061,199	Very High	Moderate	High	Very High
Bonbon	Residential Areas	11.34	4.30	38%	5,400	232,378,046	High	Moderate	Moderate	Very High
lgpit	Residential Areas	35.84	9.37	26%	5,400	505,674,413	High	Moderate	High	Very High
Luyong Bonbon	Residential Areas	12.85	7.51	28%	5,400	405,678,850	Moderate	Moderate	Moderate	Very High
Poblacion	Residential Areas	14.39	4.47	31%	5,400	5,400 241,184,827	Low	Low	Moderate	Very High
Taboc	Residential Areas	12.55	8.33	%99	5,400	449,998,931	Low	Low	High	Very High

¹ Estimated exposed areas expressed in hectares based on hazard overlay is GIS derived
² Exposure percentage derived by dividing the affected area by the total barangay allocation
³ Estimated exposed value derived by multiplying replacement cost per square meter and the estimated exposed area in hectares multiplied by 10000 (one hectare = 10000 sq. meters).

Sub task 4.2.4. Determine Critical Point Facility Exposure

Overlay the critical point facility exposure map prepared in Step 3 with the impact area map to determine the exposed critical point facilities (refer to figure 3.4.2d). Based on the map overlying, the estimated exposed critical points can be determined and summarized, including the sensitivity and adaptive capacity attributes of the elements exposed (refer to table 3.4.2d).

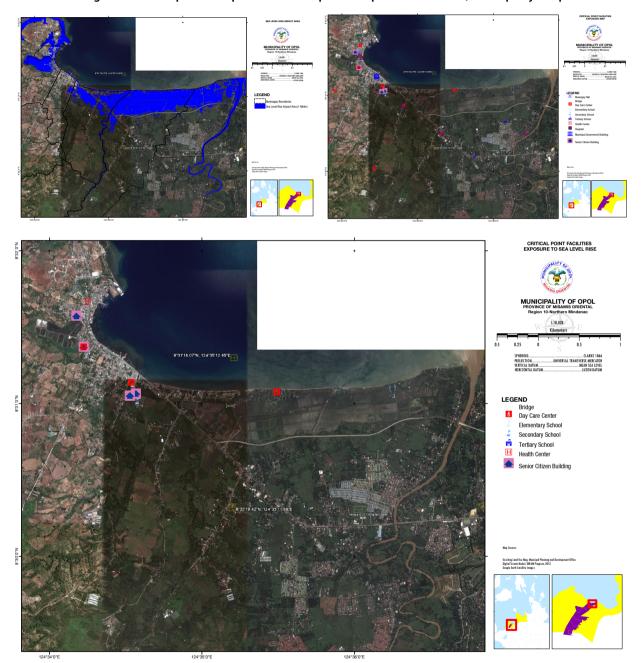


Figure 3.4.2d Sample critical point facilities exposure map to Sea Level Rise, Municipality of Opol

Table 3.4.2d Critical Point Facilities Exposure to flood per Barangay, Municipality of Opol.

	2	U	D	ш	ш	ט	Ξ	-
		EXPOSURE					SENSITIVITY	
Barangay	Facility Type	Name	Storeys	Area	Capacity (Classrooms, Bed Capacity, Loading Capacity)	Wall Materials Used	Existing Condition	Structure Employing Hazard Resistant/ Adaptation Design
Taboc Se	Senior Citizen Building	Temp. OCC School	—	50 sq meters		Concrete	Good	No
Bonbon Se	Senior Citizen Building	Bonbon Senior Citizen	2	50 sq meters		Mixed	Poor/needs major repair	No
Luyong Bonbon Se	nior Citizen Building	Luyong Bonbon Senior Citizen Building Luyong Bonbon Senior Citizen	-	50 sq meters		Concrete	Poog	Yes
Taboc	Senior Citizen Building	Senior Citizen	—	50 sq meters		Concrete	Needs repair	NO
Taboc	Secondary School	ONSTS	2	10.01 Hectares		Concrete	Needs repair	Yes
Luyong Bonbon Health Center		Luyong Bonbon Health Center	—	75 sq. meters	4 Bed Capacity	Wood	Poor	No
lgpit Fc	Foot Bridge	Bungcalalan Foot Bridge	N/A		3 Tons	Steel Centered Cable Wire	Needs minor repair	No
Bonbon	Elementary School	Opol Grace Christian School	-	10000 sq meters	6 Classrooms	Wood	needs repair	No
Luyong Bonbon Elementary School	ementary School	Luyong Bonbon Elementary School	—	4845 sq. meters	8 Classrooms	Concrete	needs repair	No
lgpit Da	Day Care Center	Day Care Center	—	50 sq meters		Concrete	Poor	No
Taboc Da	Day Care Center	Poblacion Day Care Center	—	100 sq meters		Concrete	Good	No
Bonbon Da	Day Care Center	Luyong Bonbon Day Care Center	2	50 sq meters		Mixed	Poor/needs major repair	No

Sub task 4.2.5 Lifeline Utilities

Exposure can be expressed in the linear kilometers exposed and the construction cost/replacement values. At the minimum, LGUs can limit exposure to major or significant access/distribution networks (refer to figure 3.4.2e).

- Estimate the length of exposed length per segment per susceptibility level in kilometers (Column D);
- Compute for the exposed value by multiplying the the estimated exposed segment with the estimated replacement cost per linear kilometer (Column E);
- Note: Columns F-H are the gathered sensitivity indicators in the exposure database;
- Sample computation is presented below (refer to table 3.4.2e)

Figure 3.4.2e Sample lifeline utilities exposure map to Sea Level Rise, Municipality of Opol

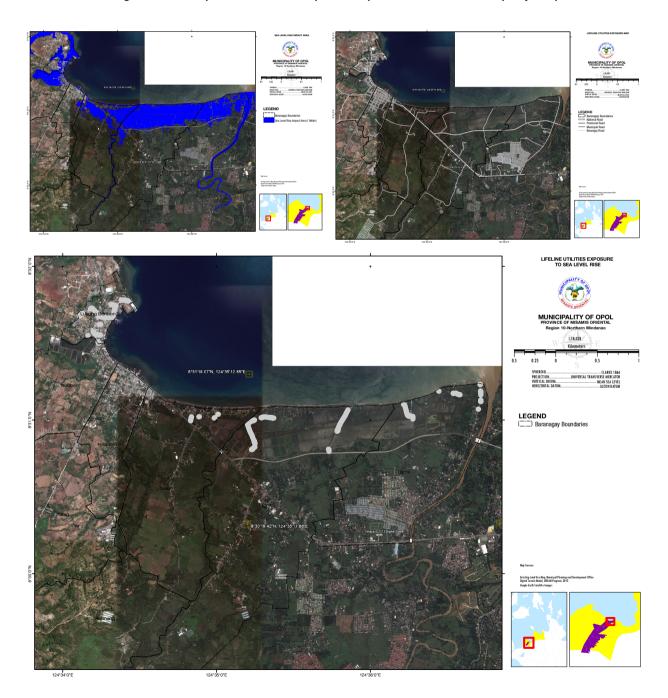


Table 3.4.2e Lifeline Utilities Exposure to Sea Level Rise, Municipality of Opol.

			<u>-</u>				
A	В	U	Q	ш	ш	ט	Ξ
		EXPOSURE				SENSITIVITY	
Name	Classificatio	Replacement Cost per linear kilometer	Exposed length (Linear Kilometers) ¹	Value of exposed Lifeline ³	Surface Type	Existing	Hazard Resistant Design
				T*5			
Metro Cagayan road	National road	23,000,000.00	0.03	782,000	Concrete	Poob	Yes
Barra Landless Road	Barangay Road	11,036,000.00	0.29	3,145,260	Concrete/Gravel	Needs Major Repairs	0 N
Malingin Road	Barangay Road	11,036,000.00	0.47	5,153,812	Concrete/Gravel	Needs Major Repairs	No
Luyong Bondon Access Road Barangay Road	d Barangay Road	18,000,000.00	0.26	4,665,060	Concrete	Needs Major Repairs	No
Poblacion to Limunda road	Provincial road	18,000,000.00	0.04	082'869	Concrete	Good	Yes
Zone 1 Road	Barangay Road	11,036,000.00	0.15	1,641,936	Concrete/Gravel	Needs Major Repairs	No
National highway to Zone 1 road	Barangay Road	11,036,000.00	90.0	611,725	Concrete	Poob	No
NIA to Bible Camp Road	Barangay Road	11,036,000.00	0.20	2,196,716	Concrete/Gravel	Needs Major Repairs	No
National Road to Malingin	Barangay Road	11,036,000.00	0.27	2,979,720	Dirt Road	Poor	No
1 Estimater and exposed lifelines expressed in linear kilometers are GIS derived	adil di bassadasa s	ar bilomatare ara GIS da	المرينا				

¹ Estimated exposed lifelines expressed in linear kilometers are GIS derived.

² % Exposure derived by dividing the exposed segment length with the total segment length.
³ Estimated affected value derived by multiplying replacement cost per linear kilometer and affected linear distance.

Task 4.3. Conduct a sensitivity analysis and describe the potential impacts

Given the exposed units, LGUs can further describe the intrinsic characteristics of the exposed elements using the gathered sensitivity indicators in the exposure database. Analyze the sensitivity indicators and determine important indicators that contributes to the area/element sensitivity to the expected climate stimuli. Discuss among the group the potential impacts and expound further identified impacts and impact chains prepared during Step 2 (scoping the potential impacts of disasters and climate change). This shall facilitate the rating of the degree of impact in the succeeding step.

Task 4.4 Rate the degree of impact

Based on the estimated exposure and the degree of sensitivities of the exposed units, and identified potential impacts, qualitatively determine the degree of impact score using the suggested rating scale (see table 3.10d). The impact rating represents the level and kind of impacts the system is likely to experience, and time and resources needed for interventions to return to pre-impact levels.

LGUs can organize workshop sessions and seek the participation of local stakeholders, members of the Planning and Development Council (C/MPDC), representatives/experts from mandated hazard mapping related agencies and representatives from the disaster risk reduction and management office. Participants shall be asked to give their subjective degree of impact scores (Table 3.3.1), guided by the information on exposure, sensitivity, list of potential impacts. Estimating the degree of damage can be qualitatively assigned using the degree of impact score. The final composite degree of damage score will be the average of scores derived representing the consensus opinion of the participants. Assign the degree of impact score for population, urban use areas, natural resource production area, critical points, and lifeline infrastructure (refer to tables 3.4.4a to 3.4.4e).

Table 3.4.3 Degree of Impact Score

		The state of the s
Degree of Impact	Degree of Impact Score	Description
High	3	Estimated direct impacts in terms of number of fatalities, injuries and value of property damage will be disastrous given the extent of exposure and current sensitivity of the system. Medium to long term indirect impacts will also be experienced which may affect development processes. Significant costs needed to return to pre-impact levels.
Moderate	2	Moderate direct impacts in terms of terms of number of fatalities, injuries and value of property damage are expected given the extent of exposure and current sensitivities of the system. Short to medium term indirect impacts will also be experienced which may affect development processes. Medium to low cost needed to return to pre-impact levels within a short to medium time period.
Low	1	Estimated direct and indirect impacts are low to negligible which can be felt within a short term period. Minimal impacts to development processes and no significant cost needed to return to pre-impact levels.

Table 3.4.4a Population Degree of Impact Rating

∢	ш	ш	9	Ξ	-	7	¥	-	Σ	Z	0	۵	ŏ
	EXPOSURE	URE				SENSITIVITY	VIIIY				IMPACI	bj	
Barangay (+	Affected Area (Hectares) ²	Exposed Population ³	Exposure Percentage	Percentage of Informal Settlers	Percentage of Of Population living in dwelling units with walls made from light to salvageable materials	Percentage of young and old dependents	Percentage of persons with disabilities	Percentage of Individuals living below the Poverty Threshold	Percentage of Malnourishe d Individuals		Degree of Impact	Impact	
										Group 1	Group 2	Group 3	Average
Barra	0.54	136	1.04%	1.06%	0.84%	33.58%	0.70%	14.55%	0.61%	m	m	m	3.00
Bonbon	0.99	263	8.73%	3.13%	2.06%	34.31%	1.01%	35.86%	2.20%	m	2	m	2.67
lgpit	7.29	1,195	12.42%	7.27%	1.75%	36.30%	0.70%	27.16%	1.06%	m	2	m	2.67
Luyong Bonbon	5.25	1,468	38.95%	2.00%	8.55%	35.43%	0.40%	41.51%	1.80%	m	m	7	2.67
Poblacion	0.36	83	2.48%	4.06%	%80.9	32.24%	2.23%	21.30%	1.50%	m	2	m	2.67
Taboc	0.93	209	7.29%	4.45%	8.74%	35.67%	0.89%	31.29%	0.59%	2	m	m	2.67
Note: Columns N-P are the assigned scores per group. Column	-P are the	assigned score	s per group. (Jolumn Q rep	resents the a	average of gr	oup scores w	rhich will repu	Q represents the average of group scores which will represent the consensus degree of impact score	ısensus de	egree of imp	oact score	

Table 3.4.4b Natural Resource based Production Areas, Degree of Impact Rating, Coastal Impact Areas

∢	U	Ω	ш	ט	I	-	7	¥	-	Σ	Z	0	۵	o
		EXPOSURE					SENSITIVITY	VITY				IMPACT	ΙζΙ	
Barangay	Dominant Crop	Exposed Area¹ (Hectares)	Exposure Percentage ²	Exposed Value (Php)	Number of Farming Families who attended climate field school	Proportion of Farming Families using sustainable production techniques	Number of Famers with access to hazard information	Number of production areas with infrastructu re coverage	% Areas with Irrigation Coverage	% Areas with Water Impoundmen t		Degree of Impact	f Impact	
											Group 1	Group 2	Group 3	Averag
Barra	Vegetable	25.76	43.92%	3,864,570	NONE	%0	27%	NONE	%0	%0	8	3	8	3.00
Bonbon	Rice	5.20	4.77%	476,080	NONE	%0	100%	NONE	%0	%0	c	c	c	3.00
lgpit	Rice	34.29	12.17%	3,141,346	NONE	4%	70%	NONE	40%	70%	c	c	c	3.00
Luyong Bonbon	Corn	1.52	40.51%	106,655	NONE	%0	35%	NONE	%0	%0	8	m	m	3.00
Malanang	Rice	0.25	0.01%	22,800	NONE	2%	35%	NONE	%98	%0	m	ĸ	m	3.00
Taboc	Rice	22.06	14.78%	2,020,678	NONE	15%	35%	NONE	35%	30%	c	m	8	3.00
Barra	Tilapia/Bangus	30.67	100.01%	1,007,446	NONE	%0	27%	NONE	100%	%0	8	2	æ	2.67
Bonbon	Tilapia/Bangus	13.56	%86.66	445,246	NONE	%0	100%	NONE	100%	%0	2	2	2	2.00
lgpit	Tilapia/Bangus	64.20	99.81%	2,108,376	NONE	%0	70%	NONE	100%	70%	c	2	c	2.67
Luyong Bonbon	Tilapia/Bangus	2.46	99.94%	80,748	NONE	%0	35%	NONE	100%	%0	2	2	2	2.00
Taboc	Tilapia/Bangus	9.40	100.01%	308,744	NONE	%0	35%	NONE	100%	30%	m	m	2	2.67
Note: Columi	Note: Columns N-P are the assigned scores per group. Column Q represents the average of group scores which will represent the consensus degree of impact score	signed scor	res per group.	Column Q re	epresents the	average of g	roup scores	which will r	epresent the	consensus d	egree of	impact so	core	

Table 3.4.4c Urban Use Area, Degree of Impact Rating, Coastal Impact Areas

0		_	Avera ge	2.67	2.67	2.67	2.67	2.67	3.00	1.00	1.33	1.00	
Z		Degree of Impact	Group 3	m	m	m	m	m	m	—	2	—	t score
Σ		egree o	Group 2	2	m	m	2	2	m				of impac
_		Δ	Group 1	m	2	2	m	m	m				degree
~		No access/ area coverage to infrastructure related hazard mitigation		Very High	Very High	Very High	Very High	Very High	t the consensus				
_	SENSITIVITY	Structure not employing hazard resistant building design		Very High	Very High	High	High	Moderate	High	Moderate	Moderate	High	ch will represen
-	SENS	Proportion of Buildings in dilapidated/ condemned Condition		High	High	High	Moderate	Moderate	Moderate	Moderate	Low	Low	oup scores whic
Ŧ		Proportion of buildings with walls with light to salvageable materials		Very High	Very High	Very High	Very High	High	High	Moderate	Low	Low	average of gro
9		Exposed Value (PHP) 3		329,027,781	19,660,107	5,186,952	7,061,199	232,378,046	505,674,413	405,678,850	241,184,827	449,998,931	represents the
ш		% Exposure ²		%86	%88	%86	100%	38%	76%	28%	31%	%99	. Column O
٥	w	Exposed Area in % Hectares Exposure		9.29	0.55	0.15	0.20	4.30	9.37	7.51	4.47	8.33	s per group
В	EXPOSURE	Land Use Category		Informal Settlers	Informal Settlers	Informal Settlers	Informal Settlers	General Residential Areas	Note: Columns L-N are the assigned scores per group. Column O represents the average of group scores which will represent the consensus degree of impact score				
4		Barangay		lgpit	Luyong Bonbon	Poblacion	Taboc	Bonbon	lgpit	Luyong Bonbon	Poblacion	Taboc	Note: Columns

Table 3.4.4d Critical Point Facilities, Degree of Impact Rating, Coastal Impact Areas

⋖	Ω.	U	Ω	ш	ш	ŋ	工	-	_	×	_	Σ
		EXPOSURE					SENSITIVITY			IMPA	CT	
Barangay	Facility Type	Name	Storeys	Area	Capacity (Classrooms, Bed Capacity, Loading Capacity)	Wall Materials Used	Existing Condition	Structure Employing Hazard Resistant/ Adaptation Design		Degree of Impact	Impact	
									Group 1	Group 2	Group 3	Averag
Bonbon	Senior Citizen Building	Bonbon Senior Citizen	2	50 sq meters		Mixed	Poor/needs major repair	o N	m	æ	2	2.67
Bonbon	Elementary School	Opol Grace Christian School	-	10000 sq meters	6 Classrooms	Wood	needs repair	N _O	2	2	m	2.33
Bonbon	Day Care Center	Luyong Bonbon Day Care Center	2	50 sq meters		Mixed	Poor/needs major repair	o N	m	Ж	m	3.00
lgpit	Foot Bridge	Bungcalalan Foot Bridge	N/A		3 Tons	Steel Centered Cable Wire	Needs minor repair	o N	т	m	m	3.00
lgpit	Day Care Center	Day Care Center	_	50 sq meters		Concrete	Poor	o N	m	m	2	2.67
Luyong Bonbon	Senior Citizen Building	Luyong Bonbon Senior Citizen	-	50 sq meters		Concrete	Poop	Yes	2	2	2	2.00
Luyong Bonbon	Health Center	Luyong Bonbon Health Center	-	75 sq. meters	4 Bed Capacity	Wood	Poor	No	æ	m	æ	3.00
Luyong Bonbon	Elementary School	Luyong Bonbon Elementary School	-	4845 sq. meters	8 Classrooms	Concrete	needs repair	N _O	2	2	2	2.00
Taboc	Senior Citizen Building	Temp. OCC School	_	50 sq meters		Concrete	Good	<u>8</u>	—	—	_	1.00
Taboc	Senior Citizen Building	Senior Citizen	-	50 sq meters		Concrete	Needs repair	N _O	—	—	2	1.33
Taboc	Secondary School	ONSTS	2	10.01 Hectares		Concrete	Needs repair	Yes	—	—	_	1.00
Taboc	Day Care Center	Poblacion Day Care Center	-	100 sq meters		Concrete	Poo 5	o N	—	—	—	1.00
Note: Column	s J-L are the assigned	Note: Columns J-L are the assigned scores per group. Column M		sents the ave	rage of group	scores which	represents the average of group scores which will represent the consensus degree of impact score	the consensi	us degree	of impact	score	

Table 3.4.4e Lifeline Utilities, Degree of Impact Rating, Coastal Impact Areas

A	8	Ο	ш	L.	g	Ŧ	-	_	¥	_
	EXPOSURE				SENSITIVITY			IMP	IMPACT	
Name	Classificatio n	Exposed length (Linear Kilometers	Value of exposed Lifeline ³	Surface Type	Existing Condition	Hazard Resistant Design		Degree o	Degree of Impact	
			- 8				Group 1	Group 2	Group 3	Average
Metro Cagayan road	National road	0.0340	782,000	Concrete	Poop	Yes	-	—	—	1.00
Barra Landless Road	Barangay Road	0.2850	3,145,260	Concrete/ Gravel	Needs Major Repairs	9	m	m	2	2.67
Malingin Road	Barangay Road	0.4670	5,153,812	Concrete/ Gravel	Needs Major Repairs	9	m	m	m	3.00
Luyong Bondon Access Road	Barangay Road	0.2592	4,665,060	Concrete	Needs Major Repairs	No	m	m	m	3.00
Poblacion to Limunda road	Provincial road	0.0388	085,580	Concrete	Poob	Yes	—	—	—	1.00
Zone 1 Road	Barangay Road	0.1488	1,641,936	Concrete/ Gravel	Needs Major Repairs	9	2	2	2	2.00
National highway to Zone 1 road	Barangay Road	0.0554	611,725	Concrete	Poob	9				1.00
NIA to Bible Camp Road	Barangay Road	0.1991	2,196,716	Concrete/ Gravel	Needs Major Repairs	9	m	2	2	2.33
National Road to Malingin	Barangay Road	0.2700	2,979,720	Dirt Road	Poor	No	8	m	2	2.67
Note: Columns I-K are the assigned scores per group. Column L represents the average of group scores which will represent the consensus degree of impact score	scores per group	o. Column L re	presents the a	iverage of group	o scores which wi	ll represent t	he consensu	us degree o	of impact so	ore

Task 4.5. Evaluate the Adaptive Capacity

Evaluate the various adaptive capacities of the system being studied by referring to the adaptive capacity indicators in the exposure database. These indicators of adaptive capacities can describe whether the system is able to accommodate or cope with the impacts with very minimal disruption or short to long term detrimental effects/impacts (refer to Table 3.4.5).

Similar to the step in assigning of degree of impact score, organize stakeholders and experts to qualitatively assign the adaptive capacity score for each element exposed using the suggested scoring system (refer to table 3.10g). Low adaptive capacities can be described as systems/areas where the transformation/adaption process will be medium to long term and far exceeds local capacities requiring national to international intervention. High adaptive capacities are areas where transformation can be implemented on the short term where the costs/resources, knowledge are within the capacities of the element exposed requiring minimal intervention from the local government (refer to Tables 3.4.5a to 3.4.5e for sample worktables).

Table 3.4.5 Adaptive capacity score and description

Degree of Adaptive Capacity	Adaptive Capacity Rating ¹	Description
Low	3	The system is not flexible to accommodate changes in the climate. Addressing the impacts will be costly. The LGU and property owners will require external assistance to address the impacts.
Moderate	2	Addressing the impacts will require significant cost but it is still within the capacity of system to adapt to potential impacts. It can accommodate within its resources the cost for adapting and mitigating impacts.
High	1	The system is able to accommodate changes in climate. There are adaptation measures in place to address impacts.

¹Higher adaptive capacity is given a low rating/score while lower adaptive capacities are given higher rating/score are will have an Inverse relationship on vulnerability

Table 3.4.5a Population, Adaptive Capacity Score, Coastal Impact Areas

Z		ore	Averag	3.00	3.00	3.00	1.67	2.67	2.67
\		Adaptive Capacity Score	Group 1 Group 2 Group 3 Averag	m	m	m	-	2	m
×		aptive Ca	Group 2	m	m	m	2	m	m
>		Ad	Group 1	m	m	m	2	m	2
>	PACITY	Government Resources		Available	government resources are not enough to fund	relocation of informal settlers in the	medium term. No available resources for	Infrastructure related hazard mitigation	projects
n	ADAPTIVE CAPACITY	Government Capacity to generate jobs			Current rate of job	creation in the Municipality may not be	enough to provide jobs to a significant	portion of the labor force	
_		Household financial capacities to relocate or retrofit		Families may have difficulties to	retrofit given current capacities	within the short to medium. However,	they are willing to pursue relocation/	retrofitting if provided external	from the local or national government
S		PhilHealth Coverage				Approximatel y 47% of the individuals	have Philheath coverage.		
~		Access to post disaster financing				Approximatel y 60% of families have	access to GSIS and SSS		
O	IMPACT	Degree of Impact Score		3.00	2.67	2.67	2.67	2.67	2.67
9		Exposure Percentag e		1.04%	8.73%	12.42%	38.95%	2.48%	7.29%
L.		Exposed Population F		136	263	1,195	1,468	83	209
ш	EXPOSURE	Affected Area (Hectares) ²		0.54	0.99	7.29	5.25	0.36	0.93
A		Barangay		Barra	Bonbon	lgpit	Luyong Bonbo	Poblacion	Taboc 0.93 209 7.29% 2.67

Columns W-Y are the assigned scores per group. Column Z represents the average of group scores which will represent the consensus adaptive capacity score

Table 3.4.5b Natural Resource based Production Areas, Adaptive Capacity Score, Coastal Impact Areas

4	U	۵	ш	g	o	. ≃		-	· n	8	×	>	2
		EXPOSUR E			IMPACT				ADAPTIVE CAPACITY				
Barangay	Dominant Crop	Exposed Area ¹ (Hectares)	Exposure Percentage ²	Exposed Value (Php) ³	Degree of Impact	Access to Insurance	Agricultura I Extension Services of the Local Governmen t	Early Warning Systems	Alternative Governmen Livelihood t Resources		Adaptive Capacity Score	apacity So	ore
					Average					Group 1	ip Group	Group 3	Avera ge
Barra	Vegetable	98.9	11.73%	1,032,000	3.00					3	m	m	3.00
Bonbon	Rice	0.93	0.85%	85,193	3.00		Only 37% of the farming	Approximate Iv 37% of	-	M	m	m	3.00
lgpit	Rice	1.51	0.54%	138,324	3.00	Approximate ly 15% of	families have access to	farming families have	Only 15% ot farming families have	m	m	m	3.00
Luyong Bonbon	Corn	1.63	43.47%	114,426	3.00	farming families can	agricultural extension	access to early	access to alternative	8	2	2	2.33
Malanang	Rice	0.18	0.01%	16,489	3.00	insurance.	the local government.	systems (EWS)	es g R	ient 3 s are	2	m	2.67
Taboc	Rice	2.31	1.55%	211,608	3.00	to cover key production	However, LGU has the	related to agricultural	rate of job to fund creation in	ugh 3	m	m	3.00
Barra	Tilapia/Bangus	25.90	84.45%	850,634	2.67	areas with crop	capacity to develop and fund	production. However,	the LGU is Infrastructure related not enough projects	ture d 3	m	2	2.67
Bonbon	Tilapia/Bangus	12.91	95.21%	424,003	2.33	can be pursued by	programs on extension to	further improved to		2	m	2	2.33
lgpit	Tilapia/Bangus	61.35	95.38%	2,014,918	2.67	the Local Government.	cover the remaining	cover the remaining	opportunities to farming communities.	M	m	2	2.67
Luyong Bonbon Tilapia/Bangus	Tilapia/Bangus	2.13	%65.98	956'69	2.33		farming families. c	farming communities.		2		<u> </u>	1.33
Taboc	Tilapia/Bangus	8.47	90.11%	278,180	2.67					C	m	2	2.67
Note: Columns R-V are the the adaptive capacity indicators in the exposure database Columns W-Y are the assigned scores per group. Column Z represents the average of	\-V are the the a e the assigned s	idaptive cap cores per g	pacity indicat Iroup. Colum	ors in the expc n Z represents	sure databa the average	ase of group so	cores which w	/ill represen	Note: Columns R-V are the the adaptive capacity indicators in the exposure database Columns W-Y are the assigned scores per group. Column Z represents the average of group scores which will represent the consensus adaptive capacity score	aptive cap	acity score	4)	

Table 3.4.5c Urban Use Areas, Adaptive Capacity Score, Coastal Impact Areas

×		ore .	Avera ge	3.00	3.00	3.00	1.33	3.00	3.00	3.00	2.00	3.00
*		Adaptive Capacity Score	Group 3	m	m	m		m	m	m		m
>		aptive Ca	Group 2	m	e e	c	2	m	m	m	m	m
n		Adi	Group 1	m	m	m		m	m	m	2	m
—	CAPACITY	Local governmen t capacity to impose/ implement zoning regulations		Majority of	non- residential structures	can conform with added	regulations in the	medium term. Maiority of	residential structures	may have difficulties conforming	with added regulations	take them medium to long term.
S	ADAPTIVE CAPACITY	Governmen t Resources				Local government	very limited but funds for	adaptation can be	the regional and national	governments or through public	private partnerships.	
œ		Available alternative sites					Alternative sites are still	within the municipality	which can accommodat e existing	land uses if needed		
ŏ		Insurance Coverage		Majority of	non- residential	property owners	have current	insurance coverage or	have capacities to purchase	within the short term.	residential structures	do not have property insurances
a		Capacity and willingness to retrofit or relocate or conform with new regulation s			There is willingness	to relocate subject to	from the local	government. There is also	to retrofit existing	highly vulnerable structures	but may take them	long-term.
0	IMPACT	Degree of Impact Score	Averag e	2.67	2.67	2.67	2.67	2.67	3.00	1.33	1.33	1.00
G		Exposed Value (PHP) ³		329,027,781	19,660,107	5,186,952	7,061,199	232,378,046	505,674,413	405,678,850	31% 241,184,827	449,998,931
ш		% Exposure		%86	%88	%86	100%	38%	76%	28%	31%	%99
۵		Exposed Area in Hectare s		9.29	0.55	0.15	0.20	4.30	9.37	7.51	4.47	8.33
ω.	EXPOSURE	Land Use Category		Informal Settlers	Informal Settlers	Informal Settlers	Informal Settlers	General Residential Areas	General Residential Areas	General Residential Areas	General Residential Areas	General Residential Areas
∢		Barangay		lgpit	Luyong Bonbon	Poblacion	Тарос	Bonbon	lgpit	Luyong Bonbon	Poblacion	Тавос

Columns U-W are the assigned scores per group. Column X represents the average of group scores which will represent the consensus adaptive capacity score Note: Columns P-T are the the adaptive capacity indicators in the exposure database 93

Table 3.4.5d Critical Point Facilities, Adaptive Capacity Score, Coastal Impact Areas

Table 3.4.5e Lifeline Utilities, Adaptive Capacity Score, Coastal Impact Areas

∢	8	Q	ш	_	Σ	Z	0	4	0	~
	EXPOSURE			IMPACT		ADAPTIVE CAPACITY	PACITY			
Name	Classificatio n	Exposed length (Linear Kilometers)	Value of exposed Lifeline ³	Degree of Impact	Insurance Coverage	Available Government Resources	Ac	Adaptive Capacity Score	pacity Sco	ē
							Group 1	Group 2	Group 3	Average
Metro Cagayan road	National road	0.03	782,000	1.00		Local Government do not	—	—	—	1.00
Barra Landless Road	Barangay Road	0.29	570,000	2.67		to fund road improvements, and or	2	—	2	1.67
Malingin Road	Barangay Road	0.47	10,741,000	3.00	- - - :	establishment of new roads (barangay and municipal).Regional	2	—	2	1.67
Luyong Bondon Access Road	Barangay Road	0.26	4,665,060	3.00	All existing roads do not have damage insurance coverage. Addressing	DPWH, however, nave available financial resources to fund	2	2	2	2.00
Poblacion to Limunda road	Provincial road	0.04	088,580	1.00	damages are mostly done through repairs using either local government	national road improvements or retrofitting within the	2	2	2	2.00
Zone 1 Road	Barangay Road	0.15	2,678,040	2.00	fund resources or those funded by regional line agencies.	Municipality but fund availability will depend on their current priorities.	2	2	—	1.67
National highway to Zone 1 road	Barangay Road	90.0	611,725	1.00	1	Also, LGU can impose special levy taxes for projects benefiting its	m	m	m	3.00
NIA to Bible Camp Road	Barangay Road	0.20	2,196,716	2.33		local constituents but local capacities may not be able to any the	m	m	m	3.00
National Road to Malingin	Barangay Road	0.27	2,979,720	2.67		additional taxes.	m	m	m	3.00
Note: Columns M-N are the the adaptive capacity indicators in	e the adaptive o	sapacity indicate		the exposure database	ase	5	-	-		

Columns 0-Q are the assigned scores per group. Column R represents the average of group scores which will represent the consensus adaptive capacity score

Task 4.6 Compute for the vulnerability index and finalize the CCVA summary table

Compute for the vulnerability index by multiplying the Impact and Adaptive Capacity Scores (refer to tables 3.4.6a-3.4.6e). Based on the computed vulnerability index, categorize the index scores into categories presented in table 4.4.6. The vulnerability category shall indicate whether the vulnerability of the system is high or low. Areas with high vulnerability can be described as areas where the expected impacts of the climate stimuli is high, due to the exposure and sensitivities, and the adaptive capacities are low to accommodate or cope with the expected impacts. Systems with low vulnerability can be described as systems where the impacts are considered high but adaptive capacities are also high.

Table 3.4.6 Vulnerability Index Scores

Degree of	Adap	tive Capacity S	core ¹	Vulnerability	Vulnerability Index Score
Impact Score	High (1)	Moderate (2)	Low (3)	vunierability	Range
High (3)	3	6	9	High	>6-9
Moderate (2)	2	4	6	Moderate	>3-6
Low (1)	1	2	3	Low	≤3

Task 4.7 Prepare Vulnerability Assessment Maps

Prepare map/s indicating the level of vulnerability for population, natural resource based production areas, urban use areas, critical point facilities, and lifeline utilities. These maps shall facilitate the identification of decision areas which should be the subject of land use related policy and program interventions. Sample output maps are presented below (refer to Figures 3.4.3a-e)

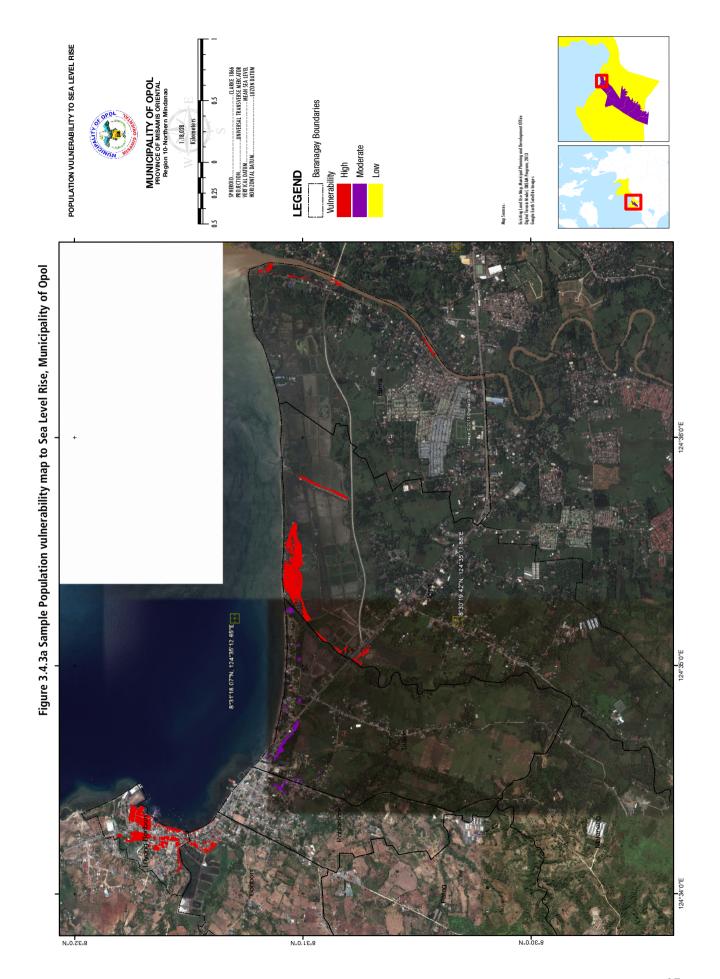


Table 3.4.6a Population Vulnerability Coastal Impact Areas

V	ш	ш	פ	O	7	AA	AB
Barangay	Affected Area (Hectares) ²	Exposed Population 3	Exposure	Degree of Impact Score	Adaptive Capacity Score	Vulnerability Index ¹	Vulnerability Category
						Q×Z	
Barra	0.54	136	1.04%	3.00	3.00	9.00	High
Bonbon	0.99	263	8.73%	2.67	3.00	8.00	High
Igpit	7.29	1,195	12.42%	2.67	3.00	8.00	High
Luyong Bonbon	5.25	1,468	38.95%	2.67	1.67	4.44	Moderate
Poblacion	0.36	83	2.48%	2.67	2.67	7.11	High
Taboc	0.93	509	7.29%	2.67	2.00	5.33	Moderate
¹ Vulnerability Index derived by multiplying the Deg ¹ Vulnerability are categorized using the suggested	erived by multiplyin egorized using the s	ig the Degree of Im aggested vulnerabi	ree of Impact Score (Column Q) and the vulnerability index ranges in Table 3.4.6	ın Q) and the Ada _ı n Table 3.4.6	¹Vulnerability Index derived by multiplying the Degree of Impact Score (Column Q) and the Adaptive Capacity Score (Column Z) ¹Vulnerability are categorized using the suggested vulnerability index ranges in Table 3.4.6	lumn Z)	

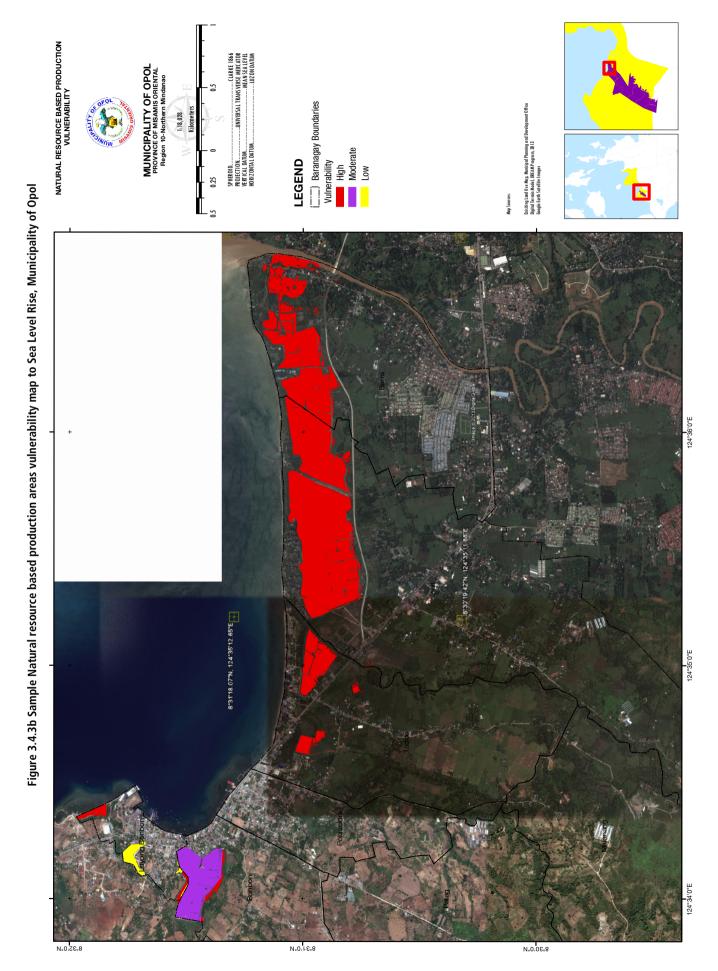


Table Table 3.4.6b Natural Resource based Production Areas Vulnerability Coastal Impact Areas

A	a	v	Q	ш	ш.	ש	ď	7	AA	AB
Barangay	Area by Dominant Crop (Hectares)	Dominant Crop	Exposed Area¹ (Hectares)	Exposure Percentage ²	Average potential income per hectare per year (PHP)	Exposed Value (Php) ³	Degree of Impact	Adaptive Capacity Score	Vulnerability Index ¹	Vulnerability Category ²
									Z×Ò	
Barra	58.66	Vegetable	6.88	11.73%	150,000.00	1,032,000	3.00	3.00	00.6	High
Bonbon	108.93	Rice	0.93	0.85%	91,605.00	85,193	3.00	3.00	00.6	High
lgpit	281.75	Rice	1.51	0.54%	91,605.00	138,324	3.00	3.00	00.6	High
Luyong Bonbon	3.75	Corn	1.63	43.47%	70,200.00	114,426	3.00	2.33	7.00	High
Malanang	1,750.28	Rice	0.18	0.01%	91,605.00	16,489	3.00	2.67	8.00	High
Taboc	149.28	Rice	2.31	1.55%	91,605.00	211,608	3.00	3.00	00.6	High
Barra	30.67	Tilapia/Bangus	25.90	84.45%	32,843	850,634	2.67	2.67	7.11	High
Bonbon	13.56	Tilapia/Bangus	12.91	95.21%	32,843	424,003	2.00	2.33	4.67	Moderate
lgpit	64.32	Tilapia/Bangus	61.35	95.38%	32,843	2,014,918	2.67	2.67	7.11	High
Luyong Bonbon	2.46	Tilapia/Bangus	2.13	%65.98	32,843	956'69	2.00	1.33	2.67	Low
Taboc	9.40	Tilapia/Bangus	8.47	90.11%	32,843	278,180	2.67	2.67	7.11	High
1Vulnerability Index derived by multiplying the Degree of Impact Score (Column Q) and the Adaptive Capacity Score (Column Z)	erived by multiply	ving the Degree of Imp	bact Score (Coli	umn Q) and the A	Adaptive Capacity	Score (Column Z)				

2Vulnerability are categorized using the suggested vulnerability index ranges in Table 3.4.6

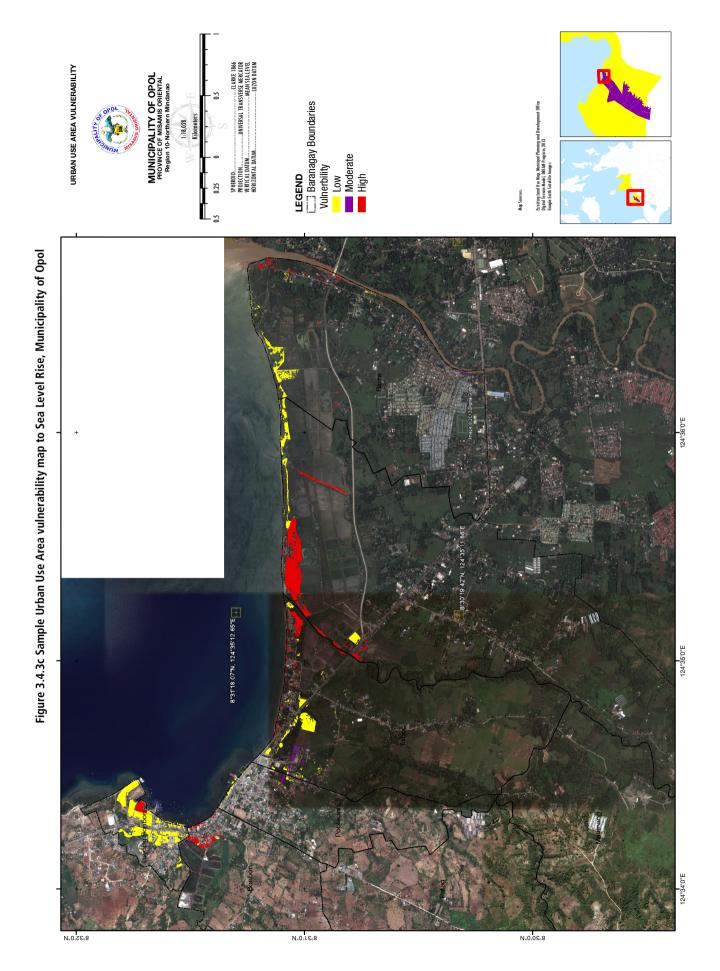


Table 3.4.6c Urban Use Areas Vulnerability Coastal Impact Areas

4	Ω	U	О	ш	ш	9	0	×	>	Z
Barangay	Land Use Category	Area per land use Category in Hectares	Exposed Area in Hectare s	% Exposure	Replacemen t Cost per 1 Sq. Meter(PHP)	Exposed Value (PHP) ³	Degree of Impact Score	Adaptive Capacity Score	Vulnerabili ty Index ¹	Vulnerabili ty Category ²
									X × O	
lgpit	Informal Settlers	9.48	9.29	%86	3,543	329,027,781	2.67	3.00	8.00	High
Luyong Bonbon	Informal Settlers	0.63	0.55	%88	3,543	19,660,107	2.67	3.00	8.00	High
Poblacion	Informal Settlers	0.15	0.15	%86	3,543	5,186,952	2.67	3.00	8.00	High
Taboc	Informal Settlers	0.20	0.20	100%	3,543	7,061,199	2.67	1.33	3.56	Moderate
Bonbon	General Residential Areas	11.34	4.30	38%	5,400	232,378,046	2.67	3.00	8.00	High
lgpit	General Residential Areas	35.84	9.37	76%	5,400	505,674,413	3.00	3.00	9.00	High
Luyong Bonbon	General Residential Areas	12.85	7.51	28%	5,400	405,678,850	1.00	3.00	3.00	Low
Poblacion	General Residential Areas	14.39	4.47	31%	5,400	241,184,827	1.33	2.00	2.67	Low
Taboc	General Residential Areas	12.55	8.33	%99	5,400	449,998,931	1.00	3.00	3.00	Low
1Vulnerability Inde 2Vulnerability are	¹Vulnerability Index derived by multiplying the Degree of Impact Score (Column O) and the Adaptive Capacity Score (Column X) ²Vulnerability are categorized using the suggested vulnerability index ranges in Table 3.4.6	ee of Impact Score (C ulnerability index ra	Column O) ar nges in Table	nd the Adapti 3.4.6	ve Capacity Scor	e (Column X)				

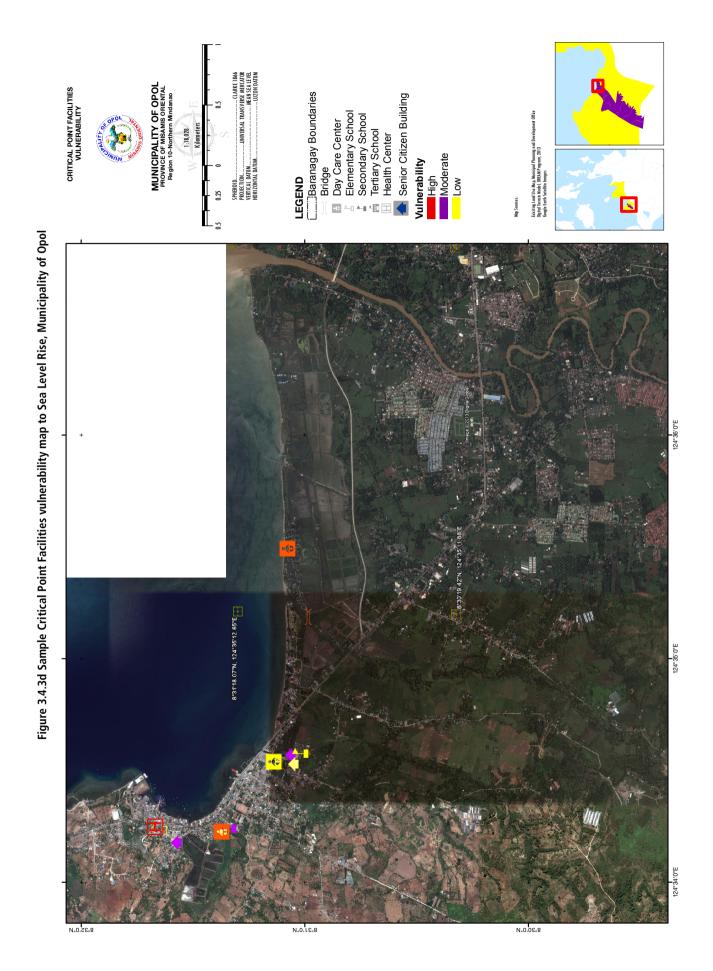


Table 3.4.6d Critical Points Facilities Vulnerability Coastal Impact Areas

		lable 3.4.6d Critical Points Facilities Vuinerability Coastal Impact Areas	ints Facilities Vuln	erability Coastal Imp	act Areas		
∢	Δ	V	ш	Σ	S	n	^
Barangay	Facility Type	Name	Area	Degree of Impact	Adaptive Capacity Score	Vulnerability Index ¹	Vulnerability Category ²
						M×S	
Bonbon	Senior Citizen Building	Bonbon Senior Citizen	50 sq meters	2.67	1.00	2.67	Low
Bonbon	Elementary School	Opol Grace Christian School	10000 sq meters	2.33	2.33	5.44	Moderate
Bonbon	Day Care Center	Bonbon Day Care Center	50 sq meters	3.00	3.00	00.6	High
Igpit	Foot Bridge	Bungcalalan Foot Bridge		3.00	3.00	9.00	High
lgpit	Day Care Center	Day Care Center	50 sq meters	2.67	3.00	8.01	High
Luyong Bonbon	Senior Citizen Building	Luyong Bonbon Senior Citizen	50 sq meters	2.00	2.67	5.33	Moderate
Luyong Bonbon	Health Center	Luyong Bonbon Health Center	75 sq. meters	3.00	2.33	7.00	High
Luyong Bonbon	Elementary School	Luyong Bonbon Elementary School	4845 sq. meters	2.00	1.33	2.67	Low
Taboc	Senior Citizen Building	Temp. OCC School	50 sq meters	1.00	3.00	3.00	Low
Taboc	Senior Citizen Building	Senior Citizen	50 sq meters	1.33	2.67	3.56	Moderate
Taboc	Secondary School	ONSTS	10.01 Hectares	1.00	2.00	2.00	Low
Taboc	Day Care Center	Poblacion Day Care Center	100 sq meters	1.00	3.00	3.00	Low
1Vulnerability Index 2Vulnerability are ca	derived by multiplying the Degr. tegorized using the suggested v	1Vulnerability Index derived by multiplying the Degree of Impact Score (Column M) and the Adaptive Capacity Score (Column S) 2Vulnerability are categorized using the suggested vulnerability index ranges in Table 3.4.6	Adaptive Capacity Sc	ore (Column S)			

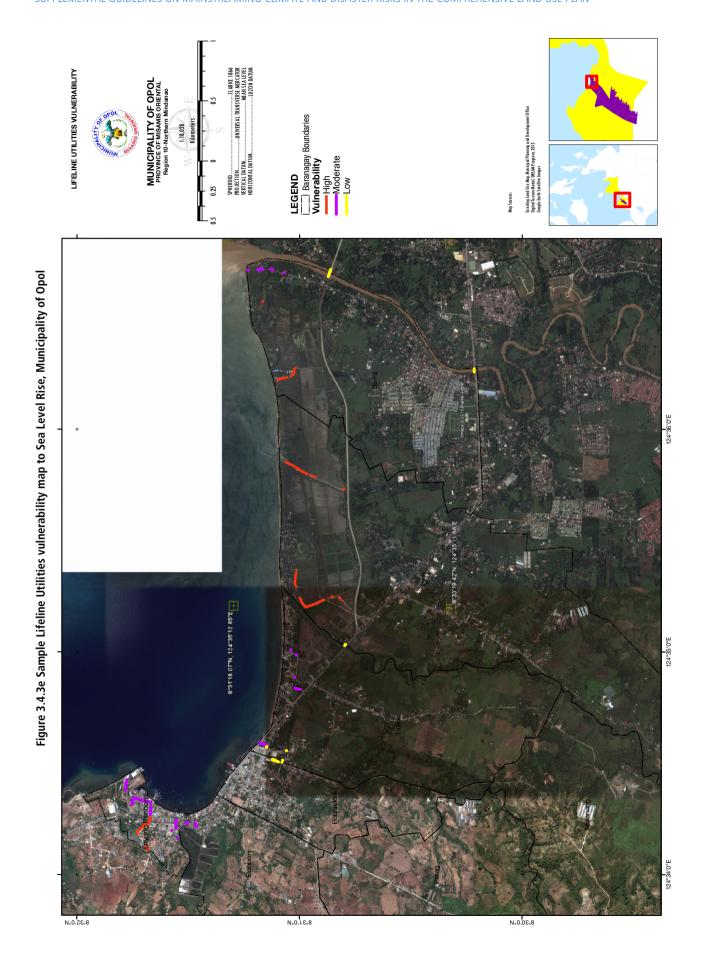


Table 3.4.6e Lifeline Utilities Vulnerability Coastal Impact Areas

A	Δ.	J	۵	ш	٦	~	S	_
Name	Classification	Replacement Cost per linear Kilometer	Exposed length (Linear Kilometer)	Value of exposed Lifeline	Degree of Impact	Adaptive Capacity Score	Vulnerability Vulnerability Index ¹ Category ²	Vulnerability Category²
							LxR	
Metro Cagayan road	National road	23,000,000.00	0.0340000	782,000	1.00	1.00	1.00	Low
Barra Landless Road	Barangay Road	11,036,000.00	0.28500	3,145,260	2.67	2.67	7.11	High
Malingin Road	Barangay Road	11,036,000.00	0.46700	5,153,812	3.00	2.67	8.00	High
Luyong Bondon Access Road	Barangay Road	18,000,000.00	0.25917	4,665,060	3.00	2.33	7.00	High
Poblacion to Limunda road	Provincial road	18,000,000.00	0.03881	698,580	1.00	1.67	1.67	Low
Zone 1 Road	Barangay Road	11,036,000.00	0.14878	1,641,936	2.00	3.00	00.9	Moderate
National highway to Zone 1 road	Barangay Road	11,036,000.00	0.05543	611,725	1.00	2.33	2.33	Low
NIA to Bible Camp Road	Barangay Road	23,000,000.00	0.19905	4,578,150	2.33	3.00	7.00	High
National Road to Malingin	Barangay Road	11,036,000.00	0.27000	2,979,720	2.67	2.67	7.11	High
1Vulnerability Index derived by multiplying the Degree of Impact Score (Column L) and the /2Vulnerability are categorized using the suggested vulnerability index ranges in Table 3.4.6	I the Degree of Impac Iggested vulnerability	t Score (Column L) and the Adaptive Capacity Score (Column R) index ranges in Table 3.4.6	Adaptive Capacity Scol	e (Column R)				

Task 4.8. Identify the decision areas and prepare a summary climate change vulnerability assessment issues matrix

Sub task 4.8.1. Identify decision areas

Based on the vulnerability maps generated for the various exposure units, highlight and identify decision areas or elements. Decision areas can be a specific site in the locality or an area cluster (i.e coastal areas). The derived level of vulnerability can be used to identify decision areas. These can be enumerated in column A (Tables 3.4.7).

Sub-task 4.8.2. Enumerate technical findings

The technical findings can be derived from the working tables prepared in the previous steps. List down the significant findings by describing the area or element in terms of the level of vulnerability, highlighting the various contributing factors such as exposure, sensitivity and adaptive capacity in column B.

Sub-task 4.8.3. Enumerate the Implications

List down the planning/development implications when the identified vulnerabilities in the various decision areas are not addressed in Column C. These can be derived from the impact chain analysis and summary sectoral impact table.

Decision Area/s Technical Findings Implications Policy Interventions C D • Identify decision areas • Identify the climate stimulus and • Highlight potential impacts • Identify the various climate in need of intervention how this may manifest in the as mentioned in the sectoral change adaptation and identified decision area; based on the impact chains; mitigation measures to vulnerability maps; reduce vulnerabilities to • Expound on the exposure • Highlight future scenario if acceptable and tolerable • This can be identified information (i.e. number of affected vulnerabilities are not levels; high to moderate population, exposure percentage, addressed: vulnerable areas or exposed area and cost); may pertain to a • Identify future needs with specific area in the • Highlight relevant sensitivities of the emphasis on the spatial exposed element to the identified Barangay; framework plan of the climate stimulus; Municipality/City; Highlight relevant adaptive capacity indicators of the exposed element to the identified climate stimulus;

Table 3.4.7 Sample Climate Change Vulnerability Assessment Summary Matrix

Sub-task 4.8.4. Evaluate vulnerability and identify policy interventions to reduce vulnerabilities

The various policy interventions to be identified should seek to reduce the level of vulnerability by addressing the exposure, sensitivity, with consideration of current adaptive capacities. LGUs should be guided by the acceptability ratings and disaster threshold levels to ensure that identified land use policy and strategy decisions will contribute in to the treatment of potential impacts that are within acceptable or tolerable levels in the long term (refer to table 3.4.8). Sample CCVA summary matrixes presented in tables 3.4.9a-3.4.9e.

Table 3.4.8 Disaster Thresholds and acceptability rating per exposure type

A		Disasto	er Thresholds/Exposur	e Unit	
Acceptability Rating	Urban Areas	Population	Resource Production Areas	Critical Points	Lifelines
Highly Unacceptable ¹	≥20% of exposed buildings are severely damaged	More than 20% of the population are affected and in need of immediate assistance.	More than 40% of exposed production areas/means of livelihood such as fishponds, crops, poultry and livestock and other agricultural/forest products are severely damaged;	Damages leads to the disruption of services which may last one week or more	Disruption of service lasting one week or more (for Municipalities) and one day for Highly Urbanized Areas
Highly Intolerable	>10-20% of exposed buildings are severely damaged	>10 - <20% of affected population in need of immediate assistance.	20-<40% of exposed production areas/means of livelihood such as fishponds, crops, poultry and livestock and other agricultural/forest products are severely damaged;	Disruption of services which may last three days to less than a week	Disruption of service by approximately five days for municipalities and less than 18 hour disruption for highly urbanized areas
Tolerable	>5-10% of buildings areas are severely damaged	>5%-10% of affected population in need of immediate assistance.	5-<20% of exposed production areas/means of livelihood such as fishponds, crops, poultry and livestock and other agricultural/forest products are severely damaged;	Disruption of service lasting for one day to less than three days	Disruption of service by approximately three days for municipalities and less than six hour disruption for highly urbanized areas
Acceptable	≤5% and above of buildings are severely damaged	≤5% of the affected population in need of immediate assistance.	≤5% and below of of exposed production areas/ means of livelihood such as fishponds, crops, poultry and livestock and other agricultural/forest products are severely damaged;	Disruption of service lasting less than one day	Disruption of service by approximately one day for municipalities and less than six hour disruption for highly urbanized areas

¹Disaster threshold percentages based on the criteria of declaring a state of calamity, NDCC Memo no. 4, series of 1998.

Table 3.4.9a Sample Climate Change Vulnerability Assessment Summary Matrix for Population, Sea Level Rise

Decision Area/s	Technical Findings	Implications	Policy Interventions
Α	В	С	D
Igpit	 High population vulnerability to a 1-meter SLR Approximately 7,29 hectares of residential areas and 1,195 individuals exposed (Exposure); It was observed that a high number of exposed elements located adjacent to coastal areas are made from light to salvageable materials (Sensitivity); Around 27% of individuals living below the poverty threshold; Majority are considered Informal settlers with no security of tenure (Sensitivity); Low awareness among inhabitants regarding the potential impacts of Climate Change and SLR (Sensitivity); No available government resources to pursue mitigation related infrastructure and relocation (Adaptive Capacity); Inhabitants willing to be relocated into safer areas if government provides assistance (Adaptive Capacity); 	 Potential submergence of low-lying settlement areas and reduction in available lands for residential uses (Impact); Exposure may increase in the future due to natural population growth and uncontrolled growth of informal settlers; Increase in mean sea-level may change coastal tidal patterns and magnitude of sudden onset hazards affecting coastal areas (i.e. storm surges and coastal flooding) and affect residential structures and its inhabitants; Redirection of government resources for disaster response, reconstruction/rehabilitation; Reduction in available lands for residential uses; Retaining residential areas may be too costly to manage and mitigate in the long term; 	 Identification of new residential areas to accommodate the relocation of approximately 1,195 individuals; Seek assistance from NGAs in the provision of housing for low income families; Disallow further upgrading of residential areas in the impact areas; Reclassify areas to protection or open space type land uses Rehabilitate wetlands and mangrove areas; Provide alternative livelihood opportunities for families below the poverty threshold; Establishment of early warning systems and contingency plans for coastal related hazards (i.e. coastal flooding and storm surges)
Luyong Bonbon	 Moderate population vulnerability to a 1-meter SLR Approximately 5.25 hectares of residential areas and 1,468 individuals exposed (Exposure); Around 10% of exposed elements are made from light to salvageable materials (Sensitivity); 42% of individuals are below the poverty threshold (Sensitivity); Majority are considered Informal settlers with no security of tenure (Sensitivity); Low awareness among inhabitants regarding the potential impacts of Climate Change and SLR (Sensitivity); No available government resources for to pursue mitigation related infrastructure and relocation (Adaptive Capacity); Inhabitants willing to be relocated into safer areas if government provides assistance (Adaptive Capacity); 	 Potential submergence of low-lying settlement areas and reduction in available lands for residential uses (Impact); Exposure may increase in the future due to natural population growth and uncontrolled growth of informal settlers; Increase in mean sea-level may change coastal tidal patterns and magnitude of sudden onset hazards affecting coastal areas (i.e. storm surges and coastal flooding) and affect residential structures and its inhabitants; Redirection of government resources for disaster response, reconstruction/rehabilitation; Reduction in available lands for residential uses; Retaining residential areas may be too costly to manage and mitigate in the long term; 	 Identification of new residential areas to accommodate the relocation of approximately 1,468 individuals and seek assistance from NGAs in the provision of housing for low income families; Rehabilitate impact areas through wetlands and mangrove restoration or set aside for production land uses; Disallow further upgrading of residential areas in the impact areas; Provide alternative livelihood opportunities for families below the poverty threshold; Reclassify areas to protection or open space type land uses Establishment of early warning systems and contingency plans for coastal related hazards (i.e. coastal flooding and storm surges);

Table 3.4.9b Sample Climate Change Vulnerability Assessment Summary Matrix for Natural Resource Production Areas, Sea Level Rise

Decision Area/s	Technical Findings	Planning Implications	Policy Interventions
Α	В	С	D
Barra	 High agricultural crop vulnerability to 1-meter SLR; Approximately 6.88 hectares or 1.032 M value of vegetable crop production areas (Exposure) with a Area with no access to hazard information and SLR mitigation infrastructure coverage (Sensitivity); Low awareness among inhabitants regarding the potential impacts of Climate Change and SLR to crop production, all farming families did not attend climate field school and practicing climate resilient/ sustainable production techniques (Sensitivity); Majority of farmers can not afford crop insurance (Adaptive Capacity); Local government can provide agricultural extension services (Adaptive Capacity); Limited alternative livelihood opportunities (Adaptive Capacity); A third of farming communities have access to EWS for agricultural production (Adaptive Capacity); 	 Permanent submergence of crop production areas and reduction in available areas for crop production; Potential reduction in vegetable crop volume output/yield and municipal food sufficiency; Detrimental effect on the socio-economic well being of farming dependent families; The need to anticipate the reduction of available production areas and production yield; Reduction in total by identifying new production areas for vegetable production (6.88 hectares); 	 Allocation of additional 6.88 hectares of crop production areas to anticipate potential losses due to permanent submersion; Identify other natural resource production areas or tap other resource areas within the municipality to provide alternative livelihood to potentially affected farming families; Maintain existing areas for production land use and employ an incremental adaptation approach to ensure sustained productivity, encourage the application of climate smart production techniques; Provide extension services with emphasis on utilizing area for fisheries production given the potential changes in the ecology of the area due to SLR;
Igpit	 High inland fisheries vulnerability to 1-meter SLR; Approximately 61.35 hectares or 2.00M value of fisheries production areas exposed representing 95% of total inland fisheries production area of the barangay (Exposure); Absence of SLR mitigation infrastructure (Sensitivity); Absence of sustainable/adaptation fisheries production techniques (Sensitivity) Limited alternative livelihood opportunities (Adaptive Capacity); Limited government resources(Adaptive Capacity); Local government can provide extension services for fisheries(Adaptive Capacity); 	 Permanent submergence of inland fisheries production areas or damage to fish plots/ cages for freshwater fish production; Economic loses to inland fisheries dependent families; Need to shift to sea water/ brackish water based fish production; Reduction in 61.35 hectares of fish production areas and potential loss in income; Provision of alternative livelihood or utilizing other resources for agriculture production to potentially affected families; 	 Shift to sustainable fisheries production consistent with mangrove and wetland type habitats; Identify other natural resource production areas to provide alternative livelihood to potentially affected farming families; Maintain existing areas for fisheries production and employ an incremental adaptation approach to ensure sustained productivity, Provide extension services with emphasis on utilizing area for fisheries production given the potential changes in the ecology of the area due to SLR;

Table 3.4.9c Sample Climate Change Vulnerability Assessment Summary Matrix for Urban Use Areas, Sea Level Rise

Decision Area/s	Technical Findings	Planning Implications	Policy Interventions
Α	В	С	
lgpit - Inform al settler areas	 9.29 hectares or 98% of informal settler areas exposed in the Barangay; High proportion of buildings with light and salvageable materials (Exposure); High proportion of buildings which are dilapidated in condition (Exposure); High proportion of structures not employing SLR mitigation design (Sensitivity); Willingness to relocate among informal settler families (Adaptive Capacity); Alternative sites can be identified by the Local Government, ability of the LGU to seek assistance from other agencies and private entities for the provision of housing (Adaptive Capacity); 	 Permanent submergence and possible isolation of informal settler families; Retaining informal settler areas will be costly to manage and maintain; Increase in mean sea level may change tidal patterns and magnitude of sudden onset hazards (i.e. coastal flooding, storm surges) affecting structures; There is an immediate need to identify relocation sites to accommodate informal settler families; 	 Managed retreat of informal settler areas by 2025 Designating areas for wetland and mangrove restoration; Encourage sustainable resource production activities within the area; Provision of alternative livelihood to potentially affected families; Identification of 9.29 hectares of residential areas to accommodate displaced families; Establish EWS and formulation of contingency plans to prevent fatalities and injuries due to potential changes in tidal pattern during sudden onset hazards;
Bonbo n - residen tial areas	 4.30 hectares of residential areas exposed to 1 meter SLR representing 38% of the residential areas in the barangay (Exposure); High proportion of buildings with light to salvageable materials and no protection infrastructure coverage (Sensitivity); Majority of structures do not have property insurance (or the capacity to afford) (Adaptive Capacity); Alternative sites can be identified by the Local Government, ability of the LGU to seek assistance from other agencies and private entities for the provision of housing (Adaptive Capacity); There is willingness to relocate provided assistance from the government (Adaptive Capacity); 	 Permanent submergence of residential areas; potential backlog of 4.30 hectares of residential areas; Need to identify residential sites to accommodate existing families; Establishing, upgrading and maintaining access/utility systems may be costly in the long term; Increase in mean sea level may change tidal patterns and magnitude of sudden onset hazards (i.e. coastal flooding, storm surges) affecting structures; structural mitigation of buildings and construction of sea walls will be very costly; 	 Managed retreat of residential areas by 2025; Reclassify areas for protection land uses; Encourage sustainable resource production activities; Land swapping for legitimate land owners; Provision of tax incentives to encourage managed retreat and relocation; Establish EWS and formulation of contingency plans to prevent fatalities and injuries due to potential changes in tidal pattern during sudden onset hazards;

Table 3.4.9d Sample Climate Change Vulnerability Assessment Summary Matrix for Critical Point Facilities, Sea Level Rise

Decision Area/s	Technical Findings	Planning Implications	Policy Interventions
Α	В	С	
Luyong Bonbon Health Center	 75 sq. meters exposed to SLR (Exposure); Building considered mixed wood and concrete (Sensitivity); Structure does not employ hazard mitigation design (Sensitivity); No property insurance coverage (Adaptive Capacity); LGU would have available funds to establish new health centers in future (Adaptive Capacity); 	 Potential submergence of the facility due to SLR; Potential reduction in the quality provision of health services in the barangay; Relocating the health center will be a better strategy in the long-term compared to rehabilitation/ retrofitting; There is a need to identify an additional 75 sq. meters for the relocation of the facility; Surrounding areas accessing the facility will also be submerged due to SLR making it difficult and expensive maintain/ensure accessibility; 	 Retain facility but discourage further expansion and improvement; Construction of additional health centers in safer areas to anticipate potential disruption or reduction in service capacity for health related services;
lgpit Day Care Center	 50 sq. meters exposed to SLR (Exposure); Building is concrete but in poor condition (Sensitivity); Structure does not employ hazard mitigation design (Sensitivity); No property insurance coverage (Adaptive Capacity); LGU would have available funds to establish new day care centers in future (Adaptive Capacity); 	 Potential submergence of the facility due to SLR; Potential reduction in the quality provision of social welfare services in the barangay; Relocating the facility will be a better strategy in the long-term compared to rehabilitation/retrofitting; Surrounding areas accessing the facility will also be submerged due to SLR making it difficult and expensive maintain/ensure accessibility; 	 Retain facility but discourage further expansion and improvement; Construction of additional social welfare buildings to cater to senior citizens in safer areas to anticipate potential disruption or reduction in service capacity.

Table 3.4.9e Sample Climate Change Vulnerability Assessment Summary Matrix for Lifeline Utilities, Sea Level Rise

Decision Area/s	Technical Findings	Planning Implications	Interventions
Α	В	С	D
Maling in Road	 Approximately 467 meters exposed and the primary transportation access of informal settler families along the Igpit coastal area (Exposure); Currently dirt road and poorly maintained (Sensitivity); No other alternative access systems leading to the area (Sensitivity); Government resources are limited (Adaptive Capacity); 	 Permanent submergence of transportation access system; Isolation of communities during extreme weather events (i.e. coastal flooding, storm surges) Upgrading and maintenance will be very costly in the long term; Further upgrading of transport system may lead to unregulated growth of informal settlements in the Malingin Area; Cost for upgrading can be used for other priority transportation systems; 	 Minimal upgrading of the Malingin Road; Strategic location of new roads to limit access and discourage further settlement growth in SLR impact areas; Provide EWS and contingency plans to minimize potential isolation and encourage pre-emptive evacuation due to sudden onset hazards;
Luyong Bonbo n Road	 Approximately 260 meters of barangay road exposed (Exposure); Only access system connecting the settlement areas of Luyong bonbon to the national road (Exposure); Currently concrete but in poor condition in need of major repairs (Exposure); No other alternative access systems leading to the area (Sensitivity); Government resources are limited (Adaptive Capacity); 	 Potential isolation of certain areas of Luyong bonbon residential areas; There is a need to establish redundant transportation system/s to link luyong bonbon and the poblacion further west (parallel to the national road); Linkage systems should also be established for the purposes of evacuation in the event of sudden onset hazards such as storm surges or coastal flooding; 	 Minimal upgrading of the Luyong Bonbon Road to discourage further settlement growth in the area; Strategic construction of redundant systems to redirect urban growth in relatively safer areas in coordination with regional line agencies; Provide EWS and contingency plans to minimize potential isolation and encourage pre-emptive evacuation due to sudden onset hazards;

Step 5. Disaster Risk Assessment (DRA)

Objectives:

- To determine the risk areas
- To be able to analyze adaptive capacities of identified risk areas

Outputs:

- DRA summary decision areas and issues matrix
- Risk maps

Process:

- Task 5.1 Assign the likelihood of occurrence
- Task 5.2 Determine exposed elements
- Task 5.3 Consequence Analysis
- Task 5.4 Risk Estimation
- Task 5.5 Analyze Adaptive Capacities
- Task 5.6. Identify the decision areas and prepare a summary disaster risk assessment matrix
- Task 5.7. Identify Policy Interventions to reduce risks to acceptable levels

Task 5.1 Assign the likelihood of occurrence

The likelihood of the hazard is an estimate of the period of time a hazard event is likely to repeat itself expressed in years. For simplification purposes, and when certainty is less determined from records, this may be estimated by the likely occurrence of the natural event. This broadly defines a return period of a hazard. Knowing the time interval for a hazard event to occur again, is important because it gives an idea of how often a threat from a hazard may be expected.

From the hazard inventory matrix prepared in step 2, assign an indicative likelihood occurrence score relative to the recurrence period of the hazard. Table 3.5.1a below provides a description of the likelihood, their corresponding return period in years, and corresponding score. The ranges describe an ordered but descriptive scale which can be assigned to real or assumed hydro-meteorological or geophysical events. The likelihood score ranges from 1-6. A score of 1 is given to very rare events (every 200-300 or more years and for example, volcanic eruptions, very strong ground shaking) while a score of 6 is given to frequently recurring or very likely recurring hazards (every 1 to 3 years and for example, recurring floods). The higher the likelihood of occurrence score the more frequent the hazard may occur.

Table 3.5.1a Indicative Likelihood of Occurrence Scores

Measure of Likelihood	Return Period in Years	Likelihood Score
Frequent	Every 1-3 years	6
Moderate	Every >3-10 years	5
Occasional	Every >10-30 years	4
Improbable	Every >30-100 years	3
Rare event	Every >100-200 years	2
Very rare event	Every >200 years	1

Source: Adopted from Reference Manual on Mainstreaming Disaster Risk Reduction and Climate Change Adaptation in the Comprehensive Land Use Plans, NEDA-HLURB-UNDP,2012

When preparing the hazard maps, the attribute information can contain the estimated flood depth/s and likelihood of occurrence per susceptibility area. Additional columns can be added to accommodate field observations/data on the flood duration, flow velocity, and speed of onset (i.e. slow, sudden). These additional hazard information should provide a more comprehensive description of the hazard which shall be considered in the succeeding steps (i.e. consequence analysis and risk estimation). Similar tables can be prepared for other hazards (refer to table 3.5.1b).

Table 3.5.1b Sample Flood Hazard Inventory, Municipality of Opol

Flood Susceptibility	Estimated Flood Depth	Likelihood of Occurrence	Likelihood of Occurrence Score
High	≥1 meter	One meter flood in the area will be equaled or exceeded every 10-30 years considered occasional in likelihood	4
Moderate to Low	<1 meter	Floods	2

Task 5.2. Determine the extent/number of exposed elements

Determining exposure involves the estimation of the number affected individuals, structures or extent of area located within hazard susceptible areas. These can be done by overlaying hazard and the population exposure map. Based on the map overlying, the estimated exposed elements can be computed and summarized, including the vulnerability attributes of the elements exposed. These vulnerability attributes will be the basis for estimating the severity of consequence in succeeding tasks. Note that all hazard information (such as susceptibility level, flood depths, and likelihood of occurrence are are included in the processed exposure table).


Sub task 5.2.1. Determine Population Exposure

Overlay the population exposure map with the hazard map. The map overlying will determine the extent of area exposed per hazard susceptibility where the number of exposed individuals can be computed. Determining exposure can be facilitated using GIS or overlay mapping using paper maps and transparencies (refer to figure 3.5.1a). The overlying will append the information from the hazard map which contains the hazard descriptors (i.e. flood susceptibility, flood depths, likelihood of occurrence) to the population exposure database map and table.

- Compute for the residential area to population density by dividing the total barangay population with the total estimated residential areas (Column G)
- Estimate the flooded areas per barangay per susceptibility level in hectares (Column H)
- Compute for the affected population by multiplying the the estimated flooded area by the residential area to population density (Column I).
- Determine the exposure percentage of affected population relative to the total baranagay population by dividing the affected population and the total barangay population (Column J)
- A sample computation of exposure is presented below (refer to table 3.5.2a).

Figure 3.5.1a Sample population flood exposure mapping



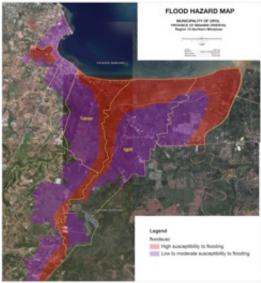

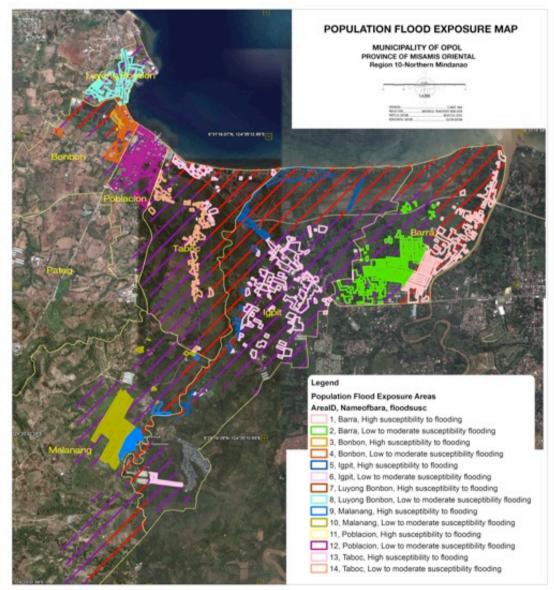


Table 3.5.2a Population Exposure Estimation


∢	8	U	Q	ш	L	g	I	-	7
	Hazard					Exposure	ure		
Barangay	Flood Susceptibility	Likelihood of Occurrence Score	Flood depth	Barangay Population	Estimated Residential Area (Hectares)	Residential Area to Population Density (Persons/ Hectare) ¹	Affected Area (Hectares) ²	Exposed Population ³	Exposure Percentage
						E/F		ВхН	I/E
Barra	HSA	4	≥1 meter	14,334	185.26	77.37	88.38	6,838	47.71%
Barra	MLSA	2	<1 meter	14,334	185.26	77.37	92.43	7,152	49.89%
Bonbon	MLSA	2	<1 meter	2,698	17.18	157.04	10.02	1,573	58.30%
Bonbon	HSA	4	≥1 meter	2,698	17.18	157.04	2.29	360	13.35%
lgpit	MLSA	2	<1 meter	10,123	252.20	40.14	175.02	7,025	69.40%
lgpit	HSA	4	≥1 meter	10,123	252.20	40.14	56.95	2,286	22.58%
Luyong Bonbon	HSA	4	≥1 meter	3,491	28.09	124.28	0.68	85	2.42%
Luyong Bonbon	MLSA	2	<1 meter	3,491	28.09	124.28	26.19	3,254	93.22%
Malanang	HSA	4	≥1 meter	3,593	102.07	35.20	13.77	485	13.49%
Malanang	MLSA	2	<1 meter	3,593	102.07	35.20	68.28	2,404	%06.99
Poblacion	HSA	4	≥1 meter	3,690	58.28	63.32	0.28	18	0.49%
Poblacion	MLSA	2	<1 meter	3,690	58.28	63.32	40.63	2,572	69.71%
Taboc	HSA	4	≥1 meter	2,918	63.68	45.82	31.49	1,443	49.45%
Taboc	MLSA	2	<1 meter	2,918	63.68	45.82	32.19	1,475	50.55%
¹ Residential Area Po ² Estimated exposed ³ Estimated affected	¹Residential Area Population Density derived by dividing the estimated population and residential areas. ² Estimated exposed areas expressed in hectares are GIS derived. ³ Estimated affected population derived from multiplying the exposed areas by the estimated Residential area to population Density.	ed by dividing stares are GIS m multiplying	the estimated prederived.	oopulation and re eas by the estim	esidential areas. ated Residential a	rea to population D	ensity.		

Sub task 5.2.2. Determine Natural Resource-based Production Area Exposure

Similar to population exposure, overlay the natural resource production area exposure map prepared in Step 3. The hazard map will be used to determine the extent of area exposure per hazard susceptibility by type of natural resource production area (refer to figure 3.5.1b). Based on the map overlying, the estimated exposed elements can be computed and summarized, including the vulnerability attributes of the elements exposed. These vulnerability attributes will be the basis for estimating the severity of consequence in succeeding tasks. Note that all hazard information such as susceptibility level, flood depths, and likelihood of occurrence are embedded in the exposure table. Proceed and compute for the estimated affected area and value, including the exposure percentage:

- Estimate the flooded natural resource-based production areas per barangay per susceptibility level in hectares (Column G).
- Determine the exposure percentage of exposed natural resource production area relative to the total baranagay allocation by dividing the exposed area and the baranagay area allocation by dominant crop (Column H).
- Compute for the exposed value by multiplying the the estimated flooded area by the estimated average annual output per hectare (Column I).
- Sample computation is presented below (refer to table 3.5.2b).

Figure 3.5.1b Sample Natural resource based production area flood exposure mapping

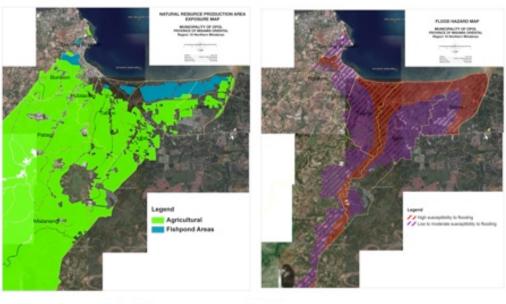

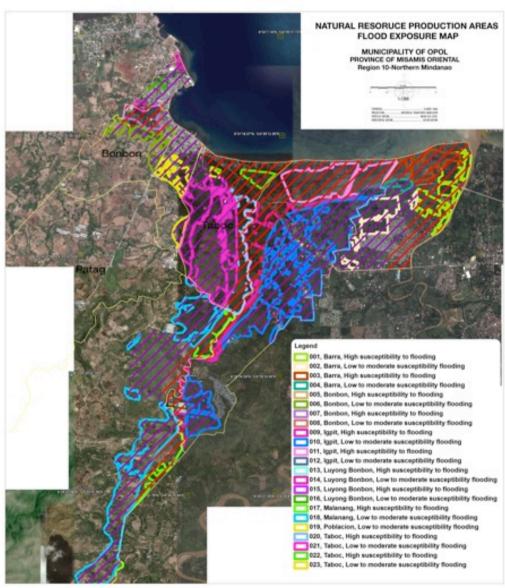


Table 3.5.2b Sample Natural Resource Production Area Exposure Table

4	a	U	Q	ш	L	G	Ξ	-	-
	HAZARD	IRD				EXPO	EXPOSURE		
Barangay	Flood Susceptibil ity	Likelihood of Occurrence Score	Flood Depth	Area by Dominant Crop (Hectares)	Dominant Crop	Exposed Area [†] (Hectares)	Exposure Percentage ²	Average potential income per hectare per year (PHP)	Exposed Value (Php) ³
							G/E		GXI
Barra	HSA	4	>1 Meter	58.66	vegetable	29.83	50.85%	150,000	4,474,500
Barra	MLSA	2	<1 Meter	58.66	vegetable	28.58	48.72%	150,000	4,287,000
Barra	HSA	4	>1 Meter	30.67	Tilapia/Bangus	26.20	85.44%	32,843	860,605
Barra	MLSA	2	<1 Meter	30.67	Tilapia/Bangus	5.09	16.61%	32,843	167,302
Bonbon	HSA	4	>1 Meter	108.93	rice	4.86	4.46%	91,605	445,200
Bonbon	MLSA	2	<1 Meter	108.93	rice	15.60	14.32%	91,605	1,429,038
lgpit	HSA	4	>1 Meter	281.75	rice	51.03	18.11%	91,605	4,674,603
lgpit	MLSA	2	<1 Meter	281.75	rice	170.53	60.53%	91,605	15,621,401
lgpit	HSA	4	>1 Meter	281.75	Tilapia/Bangus	73.63	26.13%	32,843	2,418,276
lgpit	MLSA	2	<1 Meter	281.75	Tilapia/Bangus	0.62	0.25%	32,843	20,256
1 Ectimated expos	ad areas expres	1 Estimated exposed areas expressed in hertares based on		hazard overlay is GIS derived	arivad				

¹ Estimated exposed areas expressed in hectares based on hazard overlay is GIS derived

² Exposure percentage derived by dividing the affected area by the total barangay allocation ³ Estimated affected value derived by multiplying average output per hectare with the affected area.

Sub task 5.2.3. Determine Urban Use Area Exposure

Overlay the urban use area exposure map prepared in Step 3. with the hazard map to determine the extent of area exposure per hazard susceptibility by type of land use category. Based on the map overlying, the estimated exposed area can be determined including other exposure statistics and summarized, including the vulnerability attributes of the elements exposed (refer to figure 3.5.1c).

Proceed and compute for the estimated exposed area and value, including the exposure percentage:

- Estimate the flooded urban areas per barangay per susceptibility level in hectares (Column H);
- Determine the exposure percentage of exposed urban use area relative to the total baranagay allocation by dividing the affected area and the urban use area allocation (Column I)
- Compute for the exposed value by multiplying the the estimated flooded area by the estimated replacement cost per square meter multiplied by 10,000 (Column K).
- Sample computation is presented below (refer to table 3.5.2c)

Figure 3.5.1c Sample Urban use area flood exposure mapping

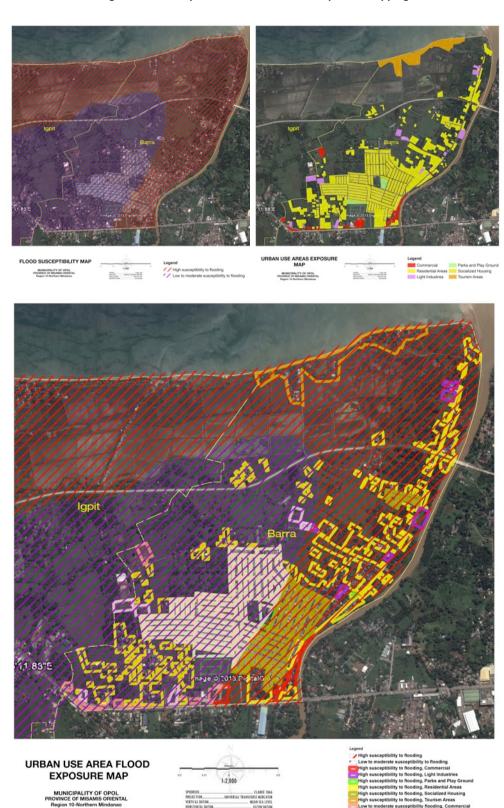


Table 3.5.2c Sample Urban Use Area Exposure Table, Barangay Barra, Municipality of Opol

∢	Δ.	U	۵	ш	9	Ŧ	-	7	¥
	HAZ	HAZARD				EXPOSURE	URE		
Barangay	Flood Susceptibility	Expected Flood Depth	Likelihood of Occurrence Score	Land Use Category (Specific Use)	Area per land use description in Hectares	Exposed Area in Hectares ¹	% Exposure ²	Replacement Cost per Sq. Meter(PHP)	Exposed Value (PHP) ³
							9/H		HxJx10000
Barra	HSA	>1 Meter	4	Commercial	3.32	1.69	51%	8,672	146,558,997
Barra	HSA	>1 Meter	4	Residential	27.79	17.24	97%	5,400	930,894,488
Barra	HSA	>1 Meter	4	Light Industries	3.06	1.32	43%	8,672	114,472,116
Barra	HSA	>1 Meter	4	Residential Areas - Socialized Housing	24.16	9.08	38%	5,400	490,285,496
Barra	HSA	>1 Meter	4	Tourism Areas	7.20	7.20	100%	8,672	624,393,360
Barra	MLSA	<1 Meter	5	Commercial	3.32	1.57	47%	8,672	136,152,441
Barra	MLSA	<1 Meter	2	Residential Areas	27.79	10.38	37%	5,400	560,480,556
Barra	MLSA	<1 Meter	2	Light Industries	3.06	1.74	21%	8,672	150,895,062
Barra	MLSA	<1 Meter	2	Residential Areas - Socialized Housing	24.16	15.08	97%	5,400	814,262,696
¹ Estimated exp ² Exposure perc	¹ Estimated exposed areas expressed in hectares based on h ² Exposure percentage derived by dividing the affected area	ssed in hectares by dividing the affe		¹ Estimated exposed areas expressed in hectares based on hazard overlay is GIS derived ² Exposure percentage derived by dividing the affected area by the total barangay allocation	tion				

³ Estimated exposed value derived by multiplying replacement cost per square meter and the estimated exposed area in hectares multiplied by 10000 (one hectare = 10000 sq. meters).

Sub task 5.2.4. Determine Critical Point Facility Exposure

Overlay the critical point facility exposure map prepared in Step 3. with the hazard map to determine the hazard susceptibility of each critical point facility. Based on the map overlying, the estimated exposed area can be computed and summarized, including the vulnerability attributes of the elements exposed (refer to figure 3.5.1d and table 3.5.2d).

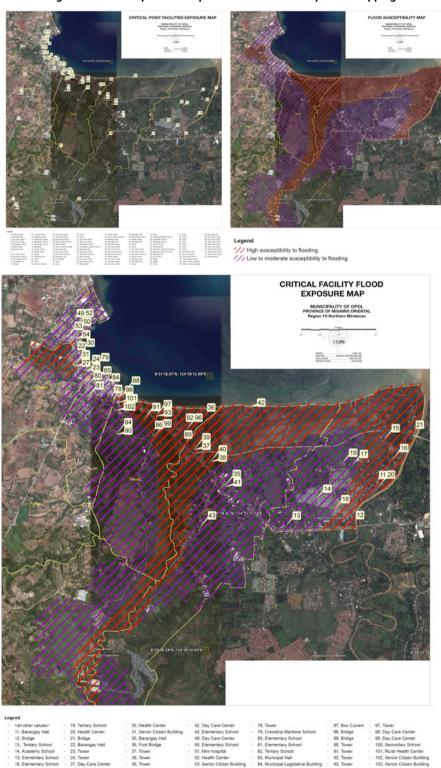


Figure 3.5.1d Sample Critical point facilities flood exposure mapping

Table 3.5.2d Critical Point Facilities Exposure to flood per Barangay, Municipality of Opol.

Α	В	С	D	E	F	G	Н
	HAZARI)				EXPOSURE	
Barangay	Flood Susceptibility	Likelihood of Occurrence Score	Expected Flood Depth	Facility Type	Storey	Exposed Area	Number of Classrooms/ Rooms/Bed Capacity
Barra	HSA	4	>1 Meter	Health Center	2	75 sq. meters	4 Bed Capacity
Barra	HSA	4	>1 Meter	Elementary School	1	6404 sq. meters	15 Classrooms
Barra	HSA	4	>1 Meter	Bridge	N/A	N/A	20 Tons
Bonbon	HSA	4	>1 Meter	Senior Citizen Building	2	50 sq meters	
Bonbon	MLSA	2	<1 Meter	Health Center	1	75 sq. meters	4 Bed Capacity
Bonbon	HSA	4	>1 Meter	Elementary School	1	10000 sq meters	6 Classrooms
Bonbon	HSA	4	>1 Meter	Day Care Center	2	50 sq meters	
lgpit	HSA	4	>1 Meter	Foot Bridge	N/A	N/A	3 Tons
Igpit	MLSA	2	<1 Meter	Elementary School	1	23986 sq. meters	8 Classrooms
lgpit	HSA	4	>1 Meter	Day Care Center	1	50 sq meters	
Luyong Bonbon	MLSA	2	<1 Meter	Health Center	1	75 sq. meters	4 Bed Capacity
Luyong Bonbon	MLSA	2	<1 Meter	Day Care Center	1	50 sq meters	
Poblacion	MLSA	2	<1 Meter	Municipal Legislative Building	2	250 sq.meters	
Poblacion	MLSA	2	<1 Meter	Municipal Hall	2	400 sq meters	
Taboc	MLSA	2	<1 Meter	Senior Citizen Building	1	50 sq meters	
Taboc	MLSA	2	<1 Meter	Rural Health Center	1	150 sq meters	6 Bed Capacity
Taboc	HSA	4	>1 Meter	Day Care Center	1	100 sq meters	
Taboc	HSA	4	>1 Meter	Bridge	N/A	N/A	15 Tons

Sub task 5.2.5 Lifeline Utilities

Lifeline utilities cover the transportation, water distribution, drainage and power distribution networks. These are also important municipal/city assets which should be assessed to ensure the delivery of lifeline related services (refer to figure 3.5.1e). Exposure can be expressed in the linear kilometers exposed, the construction cost/replacement values. At the minimum, LGUs can limit exposure to major or significant access/distribution networks.

- Estimate the length of exposed length per segment per susceptibility level in kilometers (Column G);
- Determine the exposure percentage of exposed length relative to the total length of the segment (Column H)
- Compute for the exposed value by multiplying the the estimated exposed segment with the estimated replacement cost per linear kilometer (Column J).
- Sample computation is presented below (refer to table 3.5.2e)

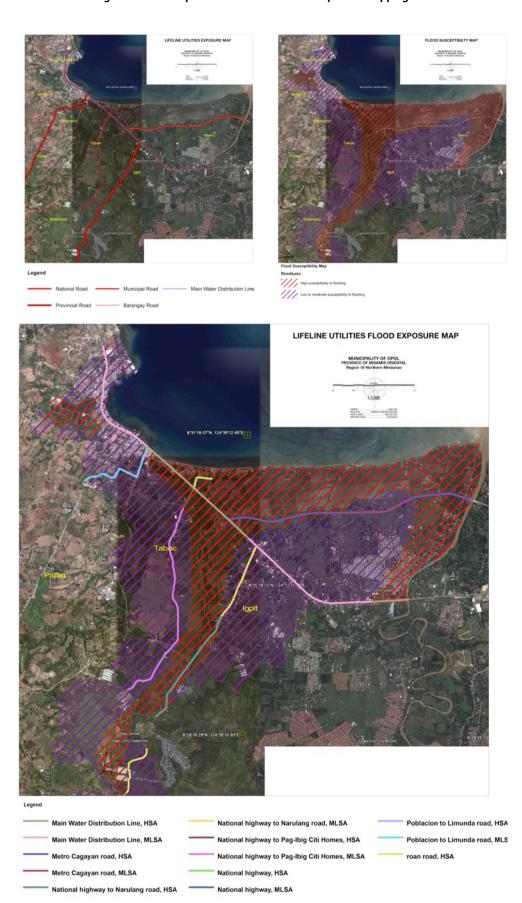


Figure 3.5.1e Sample Lifeline Utilities flood exposure mapping

Table 3.5.2e Lifeline Utilities Exposure to flood, Municipality of Opol.

∢	~	J	۵	ш	ш.	ט	Ŧ	-	_
		HAZARD				EXPOSURE	IRE		
Name	Flood Susceptibility	Likelihood of Occurrence Score	Expected Flood Depth	Classification	Exposed Classification Length (Km.) length (Linear Kilometers)¹	Exposed length (Linear Kilometers)¹	Exposure %2	Replacemen t Cost	Value of exposed Lifeline ³
							D/9		I*B
National highway to Pag-Ibig Citi Homes	MLSA	2	<1 Meter	Barangay Road	2.84	2.55	89.9%	11,036,000	28,192,566
National highway to Pag-Ibig Citi Homes	HSA	4	>1 Meter	Barangay Road	2.84	0.29	10.1%	11,036,000	3,180,575
National highway to Narulang road	HSA	4	>1 Meter	Provincial road	3.73	1.62	43.5%	18,000,000	29,165,400
National highway to Narulang road	MLSA	2	<1 Meter	Provincial road	3.73	1.64	43.9%	18,000,000	29,469,600
National highway	HSA	4	>1 Meter	National road	5.40	1.66	30.8%	23,000,000	38,288,100
National highway	MLSA	2	<1 Meter	National road	5.40	2.81	52.1%	23,000,000	64,692,100
Metro Cagayan road	HSA	4	>1 Meter	National road	3.08	2.11	68.4%	23,000,000	48,424,200
Metro Cagayan road	MLSA	2	<1 Meter	National road	3.08	0.92	29.8%	23,000,000	21,107,100
Main Water Distribution Line	HSA	4	>1 Meter	1	5.40	2.10	38.9%	N/A	N/A
Main Water Distribution Line	MLSA	2	<1 Meter	ı	5.40	3.29	%6.09	N/A	N/A
¹ Estimated exposed lifelines expressed in linear kilometers are GIS derived. ² % Exposure derived by dividing the exposed segment length with the total segment length. ³ Estimated affected value derived by multiplying replacement cost per linear kilometer and affected linear distance.	pressed in linear k g the exposed seg ed by multiplying	ilometers are GIS gment length with replacement cost	derived. I the total segme per linear kilome	nt length. eter and affected	linear distance.				

Task 5.3. Consequence analysis

Assigning the severity of consequence score shall be based on expected magnitude of the hazard (hazard characterization), the extent of exposure (determined through hazard exposure mapping) and the vulnerabilities of the exposed elements (compiled in the exposure database), the combination of which will be the basis for determining the severity of consequence rating. Although the indicators selected for the vulnerability analysis are likely to be interrelated, it has been assumed for the purpose of this guideline that each indicator can contribute dependently or independently to the vulnerability of an individual, community, structures and natural resource-based production areas.

LGUs can organize workshop sessions and seek the participation of local stakeholders, members of the Planning and Development Council (C/MPDC), representatives/experts from mandated hazard mapping related agencies and representatives from the disaster risk reduction and management office. Participants shall be asked to give their subjective severity of consequence scores (Table 3.5.3a-3.5.3e) per exposure unit, guided by the information generated from the hazard characterization, exposure mapping, and vulnerability analysis steps. Estimating the degree of damage can be qualitatively assigned using the degree of damage score matrix (Table 3.5.3) to . The final composite severity of consequence score will be the average of scores derived from the participants.

Table 3.5.3 Severity of Consequence Score Matrix

Categor y	Severity of Conseque ence Score	Population	Natural Resource Production Areas	Urban Use Areas	Critical Point Facilities	Lifeline Utilities
Very High	4	>20% of the population are affected and in need of immediate assistance.	> 40% of exposed production areas/means of livelihood such as fishponds, crops, poultry and livestock and other agricultural/forest products are severely damaged;	>40% of Non-Residential structures are severely damaged OR >20% of Residential Structures are severely damaged	Damages may lead to the disruption of services which may last one week or more	Disruption of service by lasting one week or more (for Municipalities) and one day for Highly Urbanized Areas
High	m	10 to <20% of affected po≥pulation in need of immediate assistance. 1-10 deaths and or 10 or 100 injuries	20 to <40% of exposed production areas/means of livelihood such as fishponds, crops, poultry and livestock and other agricultural/forest products are severely damaged;	>20 to <40% Non- Residential based structures are severely damaged OR >10-20% Residential Structures are severely damaged	Damages lead may to the disruption of services which may last three days to less than a week	Disruption of service by approximately five days for municipalities and less than 18 hour disruption for highly urbanized areas
Moderate	2	5% to <10% of affected population in need of immediate assistance. 1-10 injuries expected injuries.	10 to <20% of exposed production areas/means of livelihood such as fishponds, crops, poultry and livestock and other agricultural/forest products are severely damaged;	>10 to 20% Non-Residential structures are severely damaged OR >5 to 10% of dwelling units are severely damaged	Damages may lead to the disruption of service lasting for one day to less than three days	Disruption of service by approximately three days for municipalities and less than six hour disruption for highly urbanized areas
Low	-	<5% of the affected population in need of immediate assistance. Cases of minor injuries.	<10% and below of of exposed production areas/means of livelihood such as fishponds, crops, poultry and livestock and other agricultural/forest products are severely damaged;	<pre><10% of production based structures are severely damaged OR <55% of dwelling units are severely damaged</pre>	Damages may lead to the disruption of service lasting less than one day	Disruption of service by approximately one day for municipalities and less than six hour disruption for highly urbanized areas

Sub task 5.3.1. Determine factors contributing to Population Vulnerability and estimate the severity of consequence score

Before proceeding to the degree of damage scoring, organize the exposure and vulnerability matrix. The matrix shall provide a brief description of the hazard (i.e. magnitude, susceptibility levels), the extent or number of exposed elements (i.e number of individuals or households) and the attributes/characteristics of the exposed elements which contribute to their vulnerabilities (i.e. number of households below the poverty threshold, number of persons with disabilities, proportion of informal settlers, access to post disaster economic protection) relative to the expected magnitude of the hazard.

- Organize workshops with local stakeholders, policy-makers, local experts to assist in the assigning of the severity of consequence. To facilitate the assigning of the severity of consequence score, please refer to table 3.5.3 for the severity score and description.
- When assigning the severity of consequence score, consider the expected magnitude of the hazard and relate it to the extent of exposure and the various vulnerability conditions
- These can be scored by the participants or focus groups (i.e. stakeholders, TWG-LGU, Hazard/Disaster Specialists/Experts). Representatives from the mandated hazard mapping agencies can be invited to participate such as PAGASA, DOST-NOAH and MGB for Floods, PAGASA for storm surges, MGB for Rain-induced Landslides, PHIVOLCS for seismic and volcanic related hazards.
- The average of the various qualitative severity of consequence scores as assessed by the various participants can be used as the estimated severity of consequence;
- Please refer to Table 3.5.3a for a sample working table for the estimation of the severity of consequence. (Note: This is a continuation of Table 3.5.2a)

Sub task 5.3.2. Determine factors contributing the Natural resource production area vulnerability and estimate the severity of consequence score

Similar to population vulnerability, organize the exposure and vulnerability matrix for natural resource production areas (from the exposure database). The matrix should provide a comprehensive baseline information regarding the expected magnitude of the hazard, the extent of areas exposed (i.e. expressed in area and/or value), and the various vulnerability attributes that would contribute to damage (crop types, access to insurance, hazard control measures coverage, access to early warning systems, climate proofed production techniques).

Provide a qualitative severity of consequence score based on the expected hazard magnitude, extent of exposure and the various vulnerability indicators. To facilitate the assigning of the severity of consequence score, please refer to table 3.5.3 for the severity score and description. The average of the various qualitative severity of consequence scores as assessed by the various participants can be used as the estimated severity of consequence; Please refer to Table 3.5.3b for a sample working table for the estimation of the severity of consequence. (Note: This is a continuation of Table 3.5.2b)

						Table 3.5.3	За Рори	lation Sev	a Population Severity of Consequence Estimation, for Floods	onsedue	ince Estim	ation, for	· Floods						
۷	В	U	D	Э	ц	g	I	-	-	¥	L	Σ	Z	0	Ь	ð	R	S	_
		HAZARD				EXPOSU	NE.					VULNERABILITY	ABILITY			SEV	SEVERITY OF CONSEQUENCE	ONSEQUENC	щ
Barangay	Flood Susceptibil ity	Likeliho od of Occurre nce Score	Flood	Barangay Population	Estimated Residenti al Area (Hectares)	Residentia I Area to Populatio n Density (Persons/	Affected Area (Hectare s)	Affected Populatio p	Exposure Percentage	Percenta ge of Informal Settlers	Percentage living in dwelling units with walls made from light to salvageabl e materials	Percenta ge of young and old depende nts	Percentag e of persons with disabilitie s	Percentage below the Poverty Threshold	Percenta ge 9 Malnouris 1 hed Individual S	Severity of Conseque nce Score Group 1	Severity of Conseque nce Score Group 2	Severity of Conseque nce Score Group 3	Severity of Conseque nce Score_Ave rage
						E/F		ВхН	1/E										= (Q+R +S)/n*
Barra	HSA	4	≥1 meter	14,334	185.26	77.37	88.38	6,838	48%	1.06%	0.84%	33.58%	0.70%	14.55%	0.61%	8	m	c	3.00
Barra	MLSA	2	<1 meter	14,334	185.26	77.37	92.43	7,152	%09	1.06%	0.84%	33.58%	0.70%	14.55%	0.61%	m	m	m	3.00
Bonbon	MLSA	2	<1 meter	2,698	17.18	157.04	10.02	1,573	28%	3.13%	2.06%	34.31%	1.01%	35.86%	2.20%	—	-	-	1.00
Bonbon	HSA	4	≥1 meter	2,698	17.18	157.04	2.29	360	13%	3.13%	2.06%	34.31%	1.01%	35.86%	2.20%	-	-	-	1.00
lgpit	MLSA	2	<1 meter	10,123	252.20	40.14	175.02	7,025	%69	7.27%	1.75%	36.30%	0.70%	27.16%	1.06%	m	m	m	3.00
lgpit	HSA	4	≥1 meter	10,123	252.20	40.14	56.95	2,286	23%	7.27%	1.75%	36.30%	0.70%	27.16%	1.06%	8	m	8	3.00
Luyong Bonbon	HSA	4	≥1 meter	3,491	28.09	124.28	0.68	85	2%	2.00%	8.55%	35.43%	0.40%	41.51%	1.80%	-	m	2	2.00
Luyong Bonbon	MLSA	2	<1 meter	3,491	28.09	124.28	26.19	3,254	%86	2.00%	8.55%	35.43%	0.40%	41.51%	1.80%	-	m	2	2.00
Malanang	HSA	4	≥1 meter	3,593	102.07	35.20	13.77	485	13%	1.06%	%62'0	36.37%	0.84%	26.65%	0.32%	—	m	2	2.00
Malanang	MLSA	2	<1 meter	3,593	102.07	35.20	68.28	2,404	%29	1.06%	%62'0	36.37%	0.84%	26.65%	0.32%	-	-	-	1.00
Poblacion	HSA	4	≥1 meter	3,690	58.28	63.32	0.28	18	%0	4.06%	%80.9	32.25%	2.23%	21.30%	1.50%	-	_	_	1.00
Poblacion	MLSA	7	<1 meter	3,690	58.28	63.32	40.63	2,572	%02	4.06%	%80.9	32.24%	2.23%	21.29%	1.50%	-	-	—	1.00
Taboc	HSA	4	≥1 meter	2,918	63.68	45.82	31.49	1,443	49%	4.45%	8.74%	35.67%	%68.0	31.29%	0.59%	c	-	2	2.00
Taboc	MLSA	2	<1 meter	2,918	63.68	45.82	32.19	1,475	51%	4.45%	8.74%	35.67%	%68.0	31.29%	0.59%	-	m	2	2.00
*Depending on the number of groups	on the nu	ımber of	groups																

ible 3.5.3b Natural Resource Production Area Severity of Consequence Estimation

	n	NCE	Severity of Consequenc e Score_Aver age	= (R+S+T)/3	4	_	8	က	4	2	_	æ	3	2	4	2	m	4	2	2
	-	SEVERITY OF CONSEQUENCE	Severity of Consequence Score Group 1		4	-	m	m	4	m	-	m	m	m	4	2	m	4	2	m
	s	EVERITY OF	Severity of Consequ ence Score Group 1		4	-	2	4	4	2	-	4	m	2	4	m	m	4	-	-
	œ	SI	Severity of Consequ ence Score Group 1		4	-	4	2	4	-	-	7	æ	-	4	-	m	4	m	7
	o		Number of farming families wiles access to Early warning system		26.77%	100.00%	20.33%	34.55%	35.00%	26.77%	100.00%	20.33%	34.55%	100.00%	35.00%	26.77%	20.33%	35.00%	26.77%	20.33%
nation	۵		% Areas with Water Impound ment		%00.0	%00.0	20.00%	%00.0	30.00%	%00.0	%00.0	20.00%	%00.0	%00.0	30.00%	%00.0	20.00%	30.00%	%00.0	20.00%
Table 3.5.3b Natural Resource Production Area Severity of Consequence Estimation	0	LΙ	% Areas with Irrigation Coverage		%00.0	%00.0	40.00%	36.00%	35.00%	%00.0	%00.0	40.00%	36.00%	25.00%	35.00%	100.00%	100.00%	100.00%	100.00%	100.00%
Consedu	z	VULNERABILITY	Number of producti on areas with flood infrastru cture		NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE
everity of	Σ	W	Number of Famers with access to hazard informati		26.77%	100.00%	20.33%	34.55%	35.00%	26.77%	100.00%	20.33%	34.55%	100.00%	35.00%	26.77%	20.33%	35.00%	26.77%	20.33%
on Area S	_		Proportion of Farming Families using sustainab le production on techniques		%00.0	%00.0	4.07%	1.52%	15.00%	%00.0	%00.0	4.07%	1.52%	%00.0	15.00%	%00.0	%00.0	%00.0	%00.0	%00.0
Producti	¥		Number of Farming Families who attended climate field		NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE
Resource	_		Exposur e Percent age 3	H/E	0 50.85%	4.46%	3 18.11%	5 2.39%	3,057,775 22.36%	4,287,000 48.72%	1,429,038 14.32%	40 60.53%	,66 7.49%	720 31.37%	,47 75.37%	85.44%	6 26.13%	5.13%	16.61%	0.22%
Natura	-		Affected Value (Php) ²	ВХН	4,474,500	445,200	4,674,603	3,825,425				15,621,	12,006	1,530,7	10,306	860,605	2,418,276	251,279	167,302	20,256
3.5.3k	Ŧ	URE	Affect ed Area ¹ (Hecta res)		29.83	4.86	51.03	41.76	33.38	28.58	15.60	170.53	131.07	16.71	112.51	26.20	73.63	7.65	5.09	0.62
Table	G	EXPOSURE	Averag e output per hectare (PHP)		150,000	91,605	91,605	91,605	91,605	150,000	91,605	91,605	91,605	91,605	91,605	32,843	32,843	32,843	32,843	32,843
	ш		Dominant		vegetable	rice	rice	rice	rice	vegetable	rice	rice	rice	rice	rice	Filapia/Bangu: 32,843	281.75 Filapia/Bangu: 32,843	>1 Meter 149.28 Filapia/Bangu 32,843	<1 Meter 30.67 Filapia/Bangu 32,843	<1 Meter 281.75 Filapia/Bangu 32,843
	ш		Total Barang ay Area Allocati on		58.66	108.93	281.75	1,750.28	149.28	58.66	108.93	281.75	1,750.28	53.26	149.28		281.75	149.28	30.67	281.75
	۵		Flood Depth		>1 Meter	>1 Meter 108.93	>1 Meter 281.75	>1 Meter 1,750.28	>1 Meter 149.28	<1 Meter	<1 Meter 108.93	<1 Meter 281.75	<1 Meter 1,750.28	<1 Meter	<1 Meter 149.28	>1 Meter 30.67	>1 Meter	>1 Meter	<1 Meter	<1 Meter
	U	HAZARD	Likeliho od of Occurre nce Score		4	4	4	4	4	2	2	2	2	2	2	4	4	4	2	2
	ω		Flood Susce ptibili ty		HSA	HSA	HSA	HSA	HSA	MLSA	MLSA	MLSA	MLSA	MLSA	MLSA	HSA	HSA	HSA	MLSA	MLSA
	⋖		Barangay		Barra	Bonbon	lgpit	Malanang	Taboc	Barra	Bonbon	Igpit	Malanang	Poblacion	Тарос	Вапта	lgpit	Taboc	Barra	lgpit

Sub task 5.3.3. Determine factors contributing to Urban Use Area Vulnerability and estimate the severity of consequence score

Damage to structures or the building stock can be attributed to several factors namely, strucutral design, construcution wall materials used, age of the structure, current condition (i.e. dilapidated, condemened), approved building and zoning permits, and insurance coverge. These can be gathered and presented at the barangay level depending on the availability of local data and fund availability for conducting building surveys. At the minimum, a description of the building characteristics should be presented to inform and guide the estimation of the severity of consequence.

Provide a qualitative severity of consequence score based on the expected hazard magnitude, extent of exposure and the various vulnerability indicators. To facilitate the assigning of the severity of consequence score, please refer to table 5.3c for the severity score and description. The average of the various qualitative severity of consequence scores as assessed by the various participants can be used as the estimated severity of consequence. Please refer to Table 3.5.3c for a sample working table for the estimation of the severity of consequence. (Note: This is a continuation of Table 3.5.2c).

Sub task 5.3.4. Determine factors contributing to Critical Point Facilities Vulnerability and estimate the severity of consequence score

Vulnerability conditions for critical point facilities should focus mainly on the structural design characteristics of the building. LGUs should comprehensively describe the vulnerability of the structure to damage and may cover the existing structural condition, insurance coverage, and wall/roof construction materials, hazard specific design employed (i.e. building designed to withstand a 100 year flood, storm surge, potential earthquake intensity/ground acceleration, tsunami, etc.).

Provide a qualitative severity of consequence score based on the expected hazard magnitude, extent of exposure and the various vulnerability indicators. To facilitate the assigning of the severity of consequence score, please refer to table 3.5.3 for the severity score and description. The average of the various qualitative severity of consequence scores as assessed by the various participants can be used as the estimated severity of consequence. Please refer to Table 3.5.3d for a sample working table for the estimation of the severity of consequence. (Note: This is a continuation of Table 3.5.2d)

Table 3.5.3c Sample Urban Use Area Severity of Consequence Estimation, Barangay Barra, Municipality of Opol

S	SEVERITY OF CONSEQUENCE	Severity of Consequen ce Score_Aver age	= (P+Q +R)/n*	2	m	2	0	m	-	2	2	2	0	2
~	CONSE	Severity of Conseq uence Score Group 1		2	m	2	0	m	—	7	m	2	0	2
0	ERITY OF	Severity of Conseq uence Score Group 1		2	4	-	0	2	-	m	-	m	0	2
۵	SEVI	Severity of Conseq uence Score Group 1		2	2	m	0	4	-	-	2	-	0	2
. 0	l	Structures with no access/area coverage to infrastructu re related mitigation measures		Moderate	Moderate	Moderate	Moderate	Moderate	Moderate	Moderate	Low	Low	Low	Low
. ≥	ABILITY	Structure not employing hazard resistant building design		Moderate	Very High	Moderate	Residual	Very High	Low	Moderate	High	Low	Residual	High
_	VULNERABILITY	Proportion of Buildings in dilapidated/ condemned Condition		Very Low	Very Low	Low	Residual	Very Low	Moderate	Low	Very Low	Low	Residual	Very Low
· ×	l	Proportion of buildings with walls with ight to salvageable materials		Very Low	Low	Low	Residual	Low	Moderate	Low	Low	Low	Residual	Low
7		% Exposure	H/F	20.90%	62.04%	43.14%	31.45%	37.58%	100.00%	47.29%	37.35%	26.86%	67.74%	62.42%
		Affected Value (PHP)	HxGx100 00	1.69 146,558,9	930,894,4	114,472,1	12,690,60	9.08 490,285,4	624,393,3	136,152,4	560,480,5	150,895,0	27,333,60	814,262,6
=	EXPOSURE	Affected Area in Hectares (GIS Derived)		1.69	17.24	1.32	0.39	9.08	7.20	1.57	10.38	1.74	0.84	15.08
g		Replaceme nt Cost per Sq. Meter(PHP)		8,672	5,400	8,672	3,254	5,400	8,672	8,672	5,400	8,672	3,254	5,400
		Total Barangay area Allocation in Hectares		3.32	27.79	3.06	1.24	24.16	7.20	3.32	27.79	3.06	1.24	24.16
ш		Expected Flood Depth		>1 Meter	>1 Meter	>1 Meter	>1 Meter	>1 Meter	>1 Meter	<1 Meter	<1 Meter	<1 Meter	<1 Meter	<1 Meter
۵	HAZARD	Likeliho od of Occurre nce Score		4	4	4	4	4	4	2	2	2	2	2
U		Flood Susceptibi lity		HSA	HSA	HSA	HSA	HSA	HSA	MLSA	MLSA	MLSA	MLSA	MLSA
8		Land Use Category		Commercial	Residential	Light Industries	Parks and Play Ground	Socialized Housing	Tourism Areas	Commercial	Residential Areas	Light Industries	Parks and Play Ground	Socialized Housing
⋖		Baran gay		Barra	Barra	Barra	Barra	Barra	Barra	Barra	Barra	Barra	Barra	Barra

sequence Estimation
Cons
Ţ.
everity o
Facilities S
oint
Critical P
ж.
ī.
Table 3

×	В	U	۵	Ш	ட	ŋ	H	_	ſ	\checkmark	_	Σ	Z	0
			HAZARD			EXPOSURE		>	VULNERABILITY		SE	SEVERITY OF CONSEQUENCE	ONSEQUENC	بير
	Fadilty Type	Flood Susceptibility	Likelihood of Occurrence Score	Expected Flood Depth	Storey	Area	Number of Classrooms/ Rooms/Bed Capacity	Wall Materials	Existing Condition	Employing Hazard Resistant Design	Severity of Consequenc e Score Group 1	Severity of Consequenc e Score Group 2	Severity of Consequenc e Score Group 3	Severity of Consequenc e Score_Aver age = (L+M +N)/n
	Senior Citizen Building	HSA	4	>1 Meter	2	50 sq meters		Mixed	Poor/needs major repair	N N	2	4	æ	æ
	Senior Citizen Building	MLSA	2	<1 Meter	-	50 sq meters		Concrete	Needs repair	o N	-	-	-	-
	Rural Health Center	MLSA	2	<1 Meter	-	150 sq meters	6 Bed Capacity	Concrete	Good	Yes	-	-	_	-
	Municipal Legislative Building	MLSA	2	<1 Meter	2	250 sq.meters		Concrete	Good	Yes	-	-	-	-
	Municipal Hall	MLSA	2	<1 Meter	2	400 sq meters		Concrete	Poop	Yes	-	-	-	-
	Health Center	HSA	4	>1 Meter	2	75 sq. meters	4 Bed Capacity	Concrete	Good	Yes	-	-	-	-
	Health Center	MLSA	2	<1 Meter	-	75 sq. meters	4 Bed Capacity	Concrete	Good	9	-	æ	2	2
Luyong Bonbon	Health Center	MLSA	2	<1 Meter	-	75 sq. meters	4 Bed Capacity	Wood	Poor	9	2	2	2	2
	Foot Bridge	HSA	4	>1 Meter	N/A	N/A	3 Tons	Steel Centered Cable Wire	Needs minor repair	No	2	4	æ	m
	Elementary School	HSA	4	>1 Meter	_	10000 sq meters	6 Classrooms	Wood	needs repair	No No	4	2	m	m
	Elementary School	HSA	4	>1 Meter	-	6404 sq. meters	15 Classrooms	Concrete	PooD	No	2	4	2	m
	Elementary School	MLSA	2	<1 Meter	-	23986 sq. meters	8 Classrooms	Mixed	needs repair	No	2	2	2	2
	Day Care Center	HSA	4	>1 Meter	-	50 sq meters		Concrete	Poor	No.	m	4	2	m
	Day Care Center	HSA	4	>1 Meter	-	100 sq meters		Concrete	P005	9	m	æ	æ	m
	Day Care Center	HSA	4	>1 Meter	2	50 sq meters		Mixed	Poor/needs major repair	No	m	-	2	2
Luyong Bonbon	Day Care Center	MLSA	2	<1 Meter	-	50 sq meters		Wood	Poor	2	2	2	2	2
	Bridge	HSA	4	>1 Meter	N/A	N/A	20 Tons	Concrete	Poop	Yes	-	-	_	-
	Bridge	HSA	4	>1 Meter	N/A	N/A	15 Tons	Concrete	Poop	Yes	-	-	-	-

Sub task 5.3.5 Determine factors contributing to Lifeline Utilities Vulnerability and estimate the severity of consequence score

Vulnerability conditions pertain to the structural design characteristics of the lifeline asset/s. For roads, vulnerability can be described and limited to surface type, current condition, whether these roads have unique hazard resistant design specifications. Similar to transportation, water related distribution lifelines can also be described depending on its current condition, pipe materials used, and unique hazard resistant design specifications employed. These vulnerability parameters should guide the estimation of the severity of consequence and determine whether hazards will significantly affect the water and power distribution and access/linkages systems of the city/municipality.

Provide a qualitative severity of consequence score based on the expected hazard magnitude, extent of exposure and the various vulnerability indicators. To facilitate the assigning of the severity of consequence score, please refer to table 3.5.3 for the severity score and description. The average of the various qualitative severity of consequence scores as assessed by the various participants can be used as the estimated severity of consequence. Please refer to Table 3.5.3e for a sample working table for the estimation of the severity of consequence. (Note: This is a continuation of Table 3.5.2e)

Table 3.5.3e Lifeline Utilities Severity of Consequence Estimation

0	w	Severity of Consequenc e Score_Aver age	= (L+M+N)/ n	3.00	2.00	1.00	1.00	1.00	1.00	1.00	3.00	1.00	1.00	1.00	1.00	1.00
z	SEVERITY OF CONSEQUENCE	Severity of Conseque nce Score Group 3	"	æ	2	-	_	-	-	-	m	-	-	_	_	1
Σ	VERITY OF C	Severity of Conseque nce Score Group 2		4	2	-	-	-	-	-	ю	-	-	-	1	-
_	SE	Severity of Conseque nce Score Group 1		2	2	-	-	-	-	-	m	-	-	-	-	-
¥		Hazard Resistant Design		o N	o N	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
-	VULNERABILITY	Existing Condition		Needs minor repair	Poor	Poop	Poop	Poop	Poop	PooD	Needs minor repair	Poop	Poop	Poop	роо5	Poop
-	>	Surface Type		Concrete/ Gravel	Concrete/ Gravel	Concrete	Concrete	Concrete	Concrete	Concrete	Concrete	Concrete	Concrete	Concrete	Steel	Steel
I		Affecte d Value ²	G*F	1.62 29,165,40	28,192,56	2.11 48,424,20	21,107,10	38,288,10	64,692,10	1.64 29,469,60	3,180,575	0.09 1,699,200	1.03 18,511,20	3,467,511	N/A	N/A
ט	EXPOSURE	Affected Distance (Linear Kilometers		1.62	2.55	2.11	0.92	1.66	2.81	1.64	0.29	0.09	1.03	0.31	2.10	3.29
L.	Ш	Replacem ent Cost		18,000,000	11,036,000	23,000,000	23,000,000	23,000,000	23,000,000	18,000,000	11,036,000	18,000,000	18,000,000	11,036,000	N/A	N/A
ш		Expect ed Flood Depth		>1 Meter	<1 Meter	>1 Meter	<1 Meter	>1 Meter	<1 Meter	<1 Meter	>1 Meter	>1 Meter	<1 Meter	>1 Meter	>1 Meter	<1 Meter
٥	HAZARD	Likelihoo d of Occurren ce Score		4	2	4	2	4	2	2	4	4	2	4	4	2
J	_	Flood Susceptibil ity		HSA	MLSA	HSA	MLSA	HSA	MLSA	MLSA	HSA	HSA	MLSA	HSA	HSA	MLSA
a		Classificatio n		Provincial road	Barangay Road	National road	National road	National road	National road	Provincial road	Barangay Road	Provincial road	Provincial road	Barangay Road	Government	Government
A		Name		National highway to Narulang road	National highway to Pag-Ibig Citi Homes	Metro Cagayan road	Metro Cagayan road	National highway	National highway	National highway to Narulang road	National highway to Pag-Ibig Citi Homes	Poblacion to Limunda road	Poblacion to Limunda road	roan road	Main Water Distribution Line	Main Water Distribution Line

Task 5.4. Risk Estimation

Estimate the risks for the various exposure units. Risk is operationalized using the function:

Risk = Likelihood of Occurrence x Severity of Consequence

The risk estimation for the various exposure units involves three major steps namely:

- 1. Computation of the risk score;
- 2. Reclassifying risk scores into risk categories
- 3. Preparation of Risk Maps

The resulting risk score/categories, and risk maps, will provide a qualitative index of the various location of high risk areas in the locality. Based on the computed risk score/s, reclassify into risk categories using the Risk Score Matrix below (refer to table 3.5.4). Risk scores reflect three possible scenarios:

- **High Risk Areas -** areas, zones or sectors may be considered High Risk if hazard events have Very High to moderate severity of consequence given the scale of exposure, vulnerability to the potential impacts of the hazards and the level adaptive capacity to endure the direct and indirect impacts of the hazard and likelihood of occurrence ranging from frequent to improbable events. The range of risk score for this scenario is 12-24.
- **Moderate Risk** areas, zones or sectors may be considered at Moderate Risk if the Likelihood of occurrence of a hazard event is either Improbable to Rare event with a very high to moderate severity of consequence. These may also pertain to areas where the severity of consequence is Moderate to Minor but with a likelihood of occurrence that is frequent. The range of risk score for this scenario is 5-<12.
- **Low Risk -** areas, zones or sectors may be considered at Low Risk for very rare hazard events with very high to high severity of consequences. It may also pertain to moderate to low severity of consequence from an occasional to a very rare event. Risk scores for this scenario is < 5.

Table 3.5.4 Risk Score Matrix

	Likelihood		Severity of Con	sequence Score	
Indicative Likelihood of	of	Very High	High	Moderate	Low
Occurrence	Occurrence Score	4	3	2	1
Frequent (1-3 Years)	6	24	18	12	6
Moderate (4-10 Years)	5	20	15	10	5
Occasional Slight Chance (11-30 Years)	4	16	12	8	4
Improbable (31-100 Years)	3	12	9	6	3
Rare (101-200 Years)	2	8	6	4	2
Very rare (>200 years)	1	4	3	2	1

Source: Adopted from Mainstreaming Disaster Risk Reduction and Climate Change Adaptation in the Comprehensive Land Use Plans Project Report, NEDA-UNDP-HLURB,2012

Sub Task 5.4.1.1 Derive the Population Risk Score

Taking off from the severity of consequence table (Table 3.5.3a) add two columns that will contain the risk scores and risk categories. Multiply the likelihood occurrence with the average severity of consequence score derived from the previous step (refer to table 3.5.4a). The risk score will provide an indicative index of risk.

Sub Task 5.4.1.2. Reclassify the risk scores into risk categories

Based on the derived risk scores and corresponding risk categories (Table 3.5.4), reclassify the risk scores into risk categories (refer to table 3.5.4a).

Sub Task 5.4.1.3. Prepare Risk Maps

Prepare the population risk map indicting the spatial extent and distribution of risk (i.e. High, Moderate Low). These should guide the identification of decision areas for a particular hazard where site/areal issues and concerns can be articulated and the general policy directions and options can be identified and enumerated (refer to figure 3.5.2a).

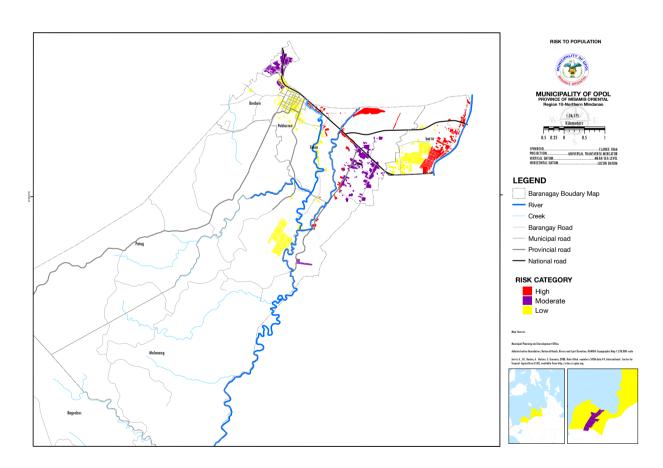


Figure 3.5.2a Risk to Population, Floods, Municipality of Opol

Table 3.5.4a Population risk to flood, Municipality of Opol.

>	RISK	Risk Category		High	Moderate	Low	Low	Moderate	High	Moderate	Low	Moderate	Low	Low	Low	Moderate	Low
¬		Risk Score	=C x T	12	9	2	4	9	12	∞	4	∞	7	4	2	∞	4
-		Severity of Consequence Score		m	m	-	-	m	m	2	2	7	-	-	-	2	2
۵		Number of Malnouri shed Individua Is		0.61%	0.61%	2.20%	2.20%	1.06%	1.06%	1.80%	1.80%	0.32%	0.32%	1.50%	1.50%	0.59%	0.59%
0		Individuals living below the Poverty Threshold		14.55%	14.55%	35.86%	35.86%	27.16%	27.16%	41.51%	41.51%	26.65%	26.65%	21.30%	21.29%	31.29%	31.29%
Z	VULNERABILITY	Number of persons with disabiliti es		0.70%	0.70%	1.01%	1.01%	0.70%	0.70%	0.40%	0.40%	0.84%	0.84%	2.23%	2.23%	%68.0	%68.0
Σ	VULNER	Number of young and old depende nts		33.58%	33.58%	34.31%	34.31%	36.30%	36.30%	35.43%	35.43%	36.37%	36.37%	32.25%	32.24%	35.67%	35.67%
_		Number of Population living in dwelling units with walls made from light to salvageabl e materials		0.84%	0.84%	2.06%	2.06%	1.75%	1.75%	8.55%	8.55%	0.79%	0.79%	%80'9	%80'9	8.74%	8.74%
¥		Number of Informal Settlers		1.06%	1.06%	3.13%	3.13%	7.27%	7.27%	2.00%	2.00%	1.06%	1.06%	4.06%	4.06%	4.45%	4.45%
_		Exposure Percentage	I/E	47.71%	49.89%	58.30%	13.35%	69.40%	22.58%	2.42%	93.22%	13.49%	%06'99	0.49%	69.71%	49.45%	50.55%
-		Affected Populatio n ³	Эхн	6,838	7,152	1,573	360	7,025	2,286	85	3,254	485	2,404	18	2,572	1,443	1,475
I	POSURE	Affecte d Area (Hectar es) ²		88.38	92.43	10.02	2.29	175.02	56.95	0.68	26.19	13.77	68.28	0.28	40.63	31.49	32.19
ט	EXPC	Residenti al Area to Populatio n Density (Persons/ Hectare)¹	E/F	77.37	77.37	157.04	157.04	40.14	40.14	124.28	124.28	35.20	35.20	63.32	63.32	45.82	45.82
ш.		Estimate d Residenti al Area (Hectares		185.26	185.26	17.18	17.18	252.20	252.20	28.09	28.09	102.07	102.07	58.28	58.28	63.68	63.68
ш		Barangay Populatio n		≥1 meter 14,334.(185.26	<1 metel 14,334.(185.26	<1 metel 2,698.00	≥1 meter 2,698.00	<1 metel 10,123.(252.20	≥1 meter 10,123.(252.20	≥1 meteı 3,491.0(3,491.00	≥1 meter 3,593.0(102.07	<1 metel 3,593.0(102.07	≥1 metel 3,690.00	<1 metel 3,690.00	≥1 meter 2,918.00	<1 metel 2,918.00
۵		Flood		≥1 meteı	<1 metel	<1 mete	≥1 meteı	<1 mete	≥1 meteı	≥1 meteı	<1 metel	≥1 meteı	<1 mete	≥1 meteı	<1 mete	≥1 meteı	<1 meter
U	HAZARD	Likeliho od of Occurre nce Score		4	7	7	4	7	4	4	7	4	7	4	7	4	7
m		Flood Susceptibi lity		HSA	MLSA	MLSA	HSA	MLSA	HSA	HSA	MLSA	HSA	MLSA	HSA	MLSA	HSA	MLSA
∢		Barangay		Barra	Barra	Bonbon	Bonbon	lgpit	lgpit	Luyong Bon	Luyong Bon	Malanang	Malanang	Poblacion	Poblacion	Taboc	Тарос

Sub Task 5.4.2.1 Derive the Natural Resource Areas Risk Score

Taking off from the severity of consequence table (Table 3.5.3b) add two columns that will contain the risk scores and risk categories. Multiply the likelihood occurrence with the average severity of consequence score derived from the previous step (refer to table 3.5.4b). The risk score will provide an indicative index of risk.

Sub Task 5.4.2.2. Reclassify the risk scores into risk categories

Based on the recommended risk scores and corresponding risk categories (3.5.4), reclassify risk scores into risk categories (refer to table 3.5.4b).

Sub Task 5.4.2.3. Prepare Risk Maps

Prepare the natural resource production area risk map indicting the spatial extent and distribution of risk (i.e. High, Moderate Low). These should guide the identification of decision areas for a particular hazard where site/areal issues and concerns can be articulated and the general policy directions and options can be identified and enumerated (refer to figure 3.5.2b).

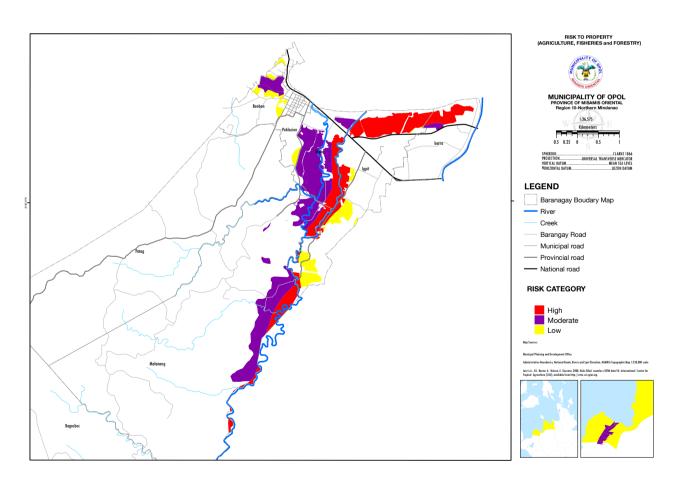


Figure 3.5.2b Risk to Natural resource based production areas, Floods, Municipality of Opol

Table 3.5.4b Natural resource production area risk to flood, Municipality of Opol.

×	3K	Risk Category		High	Low	High	High	High	Low	Low	Moderate	Moderate	Low	Moderate	Moderate	High	High	Low	Low
>	RISK	Risk Score	=C x T	16	4	12	12	16	4	7	9	9	4	∞	∞	12	16	4	4
¬		Severity of Consequenc e Score		4	-	m	m	4	2	-	m	m	2	4	7	m	4	2	7
ŏ		Number of farming families with access to Early warning		26.77%	100.00%	20.33%	34.55%	35.00%	26.77%	100.00%	20.33%	34.55%	100.00%	35.00%	26.77%	20.33%	35.00%	26.77%	20.33%
<u>~</u>		% Areas with Water Impound ment		0.00%	%00.0	20.00%	%00.0	30.00%	%00.0	%00.0	20.00%	%00.0	%00.0	30.00%	%00.0	20.00%	30.00%	%00.0	20.00%
0	<u></u>	% Areas with Irrigation Coverage		%00.0	%00.0	40.00%	36.00%	35.00%	%00.0	%00.0	40.00%	36.00%	25.00%	35.00%	100.00%	100.00%	100.00%	100.00%	100.00%
z	VULNERABILI	Number of producti on areas with flood infrastru cture		NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE
≥	N	Number of Famers with access to hazard informati		26.77%	100.00%	20.33%	34.55%	35.00%	26.77%	100.00%	20.33%	34.55%	100.00%	35.00%	26.77%	20.33%	35.00%	26.77%	20.33%
_		Proporti on of Farming Families using sustaina ble producti on techniqu		%00.0	%00.0	4.07%	1.52%	15.00%	%00.0	%00.0	4.07%	1.52%	%00.0	15.00%	%00.0	%00.0	%00.0	%00.0	%00.0
¥		Number of Farming Families who attended climate field		NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE	NONE
-		Exposur e Percent age ³	H/E	0 50.85%	4.46%	3 18.11%	5 2.39%	,057,775 22.36%	4,287,000 48.72%	,429,038 14.32%	15,621,40 60.53%	6 7.49%	0 31.37%	10,306,47 75.37%	85.44%	6 26.13%	5.13%	16.61%	0.22%
-		Affecte d Value (Php) ²	ВхН	4,474,500	445,200	4,674,603	3,825,425	\sim		—		12,006,66	1,530,720		860,605	2,418,276	251,279	167,302	20,256
Ŧ	URE	Affect ed Area (Hecta res)		29.83	4.86	51.03	41.76	33.38	28.58	15.60	170.53	131.07	16.71	112.51	26.20	73.63	7.65	5.09	0.62
ی	EXPOSURE	Averag e output per hectare (PHP)		150,000	91,605	91,605	91,605	91,605	150,000	91,605	91,605	91,605	91,605	91,605	ı 32,843	ı 32,843	ı 32,843	J 32,843	ı 32,843
ш		Dominant		vegetable	rice	rice	rice	rice	vegetable	rice	rice	rice	rice	rice	Filapia/Bangu	281.75 Filapia/Bangu	149.28 Filapia/Bangu	Filapia/Bangu	<1 Meter 281.75 Filapia/Bangu
ш		Total Barang ay Area Allocati on		1 58.66	108.93	>1 Meter 281.75	>1 Meter 1,750.28	>1 Meter 149.28	1 58.66	<1 Meter 108.93	1 281.75	<1 Meter 1,750.28	1 53.26	<1 Meter 149.28	30.67			30.67	1 281.75 1
٥		Flood		>1 Metei	>1 Metei	>1 Mete	>1 Mete	>1 Mete	<1 Meter	<1 Mete	<1 Meter	<1 Mete	<1 Meter	<1 Mete	>1 Meter	>1 Meter	>1 Meter	<1 Meter	<1 Mete
U	HAZARD	Likeliho od of Occurre nce Score		4	4	4	4	4	7	7	2	7	7	7	4	4	4	2	7
Δ.		Flood Susce ptibili ty		HSA	HSA	HSA	HSA	HSA	MLSA	MLSA	MLSA	MLSA	MLSA	MLSA	HSA	HSA	HSA	MLSA	MLSA
4		Barangay		Barra	Bonbon	lgpit	Malanang	Тарос	Barra	Bonbon	lgpit	Malanang	Poblacion	Taboc	Barra	lgpit	Taboc	Barra	1 4 4

Sub Task 5.4.3.1 Derive the Urban Use Areas Risk Score

Taking off from the severity of consequence table (Table 3.5.3c) add two columns that will contain the risk scores and risk categories. Multiply the likelihood occurrence with the average severity of consequence score derived from the previous step (refer to table 3.5.4c). The risk score will provide an indicative index of risk.

Sub Task 5.4.3.2. Reclassify the risk scores into risk categories

Based on the recommended risk scores and corresponding risk categories (Table 3.5.4), reclassify risk scores into risk categories (refer to Table 3.5.4c).

Sub Task 5.4.3.3. Prepare Risk Maps

Prepare the urban use area risk map indicting the spatial extent and distribution of risk (i.e. High, Moderate Low). These should guide the identification of decision areas for a particular hazard where site/areal issues and concerns can be articulated and the general policy directions and options can be identified and enumerated (refer to figure 3.5.2c).

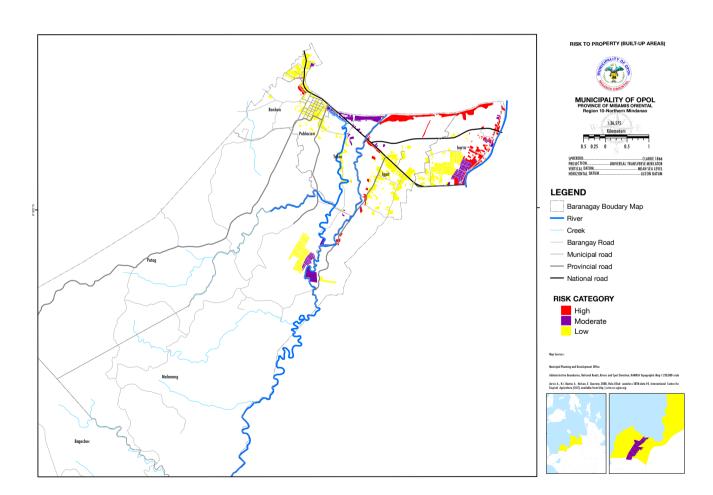


Figure 3.5.2c Risk to Urban use areas, Floods, Municipality of Opol

Table 3.5.4c Urban Use Area Risk to flood, Municipality of Opol.

n	RISK	Risk Category		Moderate	High	Moderate	None	High	Low	Low	Low	Low	None	Low
H	R	Risk Score	=S x D	∞	12	œ	0	12	4	4	4	4	0	4
S		Severity of Consequen ce Score		2	m	7	0	m	-	7	2	7	0	7
0		Structures with no access/area coverage to infrastructu re related mitigation measures		Moderate	Moderate	Moderate	Moderate	Moderate	Moderate	Moderate	Low	Low	Low	Low
Σ	ABILITY	Structure not employing hazard resistant building design		Moderate	Very High	Moderate	Residual	Very High	Low	Moderate	High	Low	Residual	High
_	VULNERABILITY	Proportion of Buildings in dilapidated/ condemned Condition		Very Low	Very Low	Low	Residual	Very Low	Moderate	Low	Very Low	Low	Residual	Very Low
¥		Proportion of buildings with walls with light to salvageable materials		Very Low	Low	Low	Residual	Low	Moderate	Low	Low	Low	Residual	Low
_		% Exposure	H/F	20.90%	62.04%	43.14%	31.45%	37.58%	624,393,3 100.00%	47.29%	37.35%	26.86%	67.74%	62.42%
-	ш	Affected Value (PHP)	HxGx100 00	146,558,9	930,894,4	114,472,1	12,690,60	490,285,4	624,393,3	136,152,4	560,480,5	150,895,0	27,333,60	15.08 814,262,6
Ŧ	EXPOSURE	Affected Area in Hectares (GIS Derived)		1.69	17.24	1.32	0.39	9.08	7.20	1.57	10.38	1.74	0.84	15.08
9	ш	Replaceme nt Cost per Sq. Meter(PHP)		8,672	5,400	8,672	3,254	5,400	8,672	8,672	5,400	8,672	3,254	5,400
ш.		Total Barangay area Allocation in Hectares		3.32	27.79	3.06	1.24	24.16	7.20	3.32	27.79	3.06	1.24	24.16
ш		Expected Flood Depth		>1 Meter	>1 Meter	>1 Meter	>1 Meter	>1 Meter	>1 Meter	<1 Meter	<1 Meter	<1 Meter	<1 Meter	<1 Meter
۵	HAZARD	Likeliho od of Occurre nce Score		4	4	4	4	4	4	2	2	2	2	2
J		Flood Susceptibi lity		HSA	HSA	HSA	HSA	HSA	HSA	MLSA	MLSA	MLSA	MLSA	MLSA
\times		Land Use Category		Commercial	Residential	Light Industries	Parks and Play Ground	Socialized Housing	Tourism Areas	Commercial	Residential Areas	Light Industries	Parks and Play Ground	Socialized Housing
∢		Baran gay		Barra	Barra	Barra	Barra	Barra	Barra	Barra	Barra	Barra	Barra	Barra

Sub Task 5.4.4.1 Derive the Critical Facilities Risk Score

Taking off from the severity of consequence table (Table 3.5.3d) add two columns that will contain the risk scores and risk categories. Multiply the likelihood occurrence with the average severity of consequence score derived from the previous step (refer to Table 3.5.4d). The risk score will provide an indicative index of risk.

Sub Task 5.4.4.2. Reclassify the risk scores into risk categories

Based on the recommended risk scores and corresponding risk categories (Table 3.5.4), reclassify risk scores into risk categories (refer to Table 3.5.4d).

Sub Task 5.4.4.3. Prepare Risk Maps

Prepare the critical point facility risk map indicting the risk level (i.e. High, Moderate Low) per facility. These should guide the identification of facilities for a particular hazard where issues and concerns can be articulated and the general policy directions and options can be identified and enumerated (refer to figure 3.5.2d).

Figure 3.5.2d Risk to Critical Point Facilities, Floods, Municipality of Opol $\,$

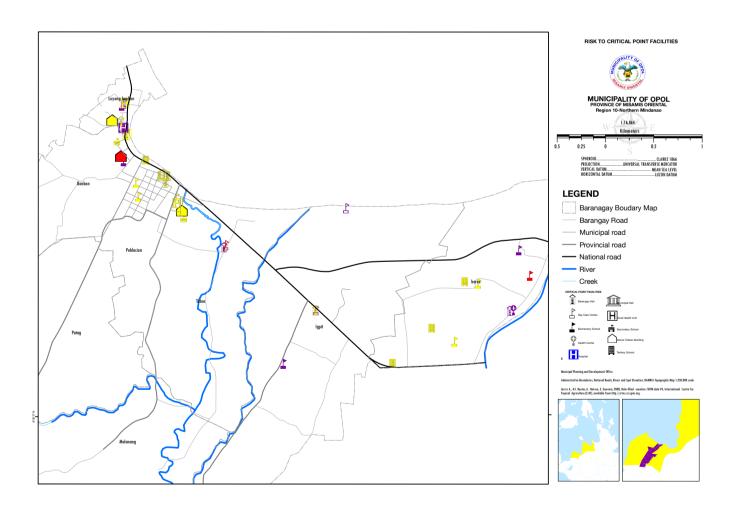


Table 3.5.4d Critical Point Facilities Risk to flood, Municipality of Opol.

A	В	U	٥	ш	ட	ŋ	Ŧ	-	ſ	\checkmark	0	۵	Ŏ
			HAZARD				VULN	VULNERABILITY				_	SISK
Barangay	Facility Type	Flood Susceptibility	Likelihood of Occurrence Score	Expected Flood Depth	Storey	Area	Number of Classrooms/ Rooms/Bed Capacity	Wall Materials	Existing Condition	Employing Hazard Resistant Design	Severity of Consequence Score	Risk Score	Risk Category
												=D x 0	
Barra	Health Center	HSA	4	>1 Meter	2	75 sq. meters	4 Bed Capacity	Concrete	Pood	Yes	-	4	Low
Barra	Elementary School	HSA	4	>1 Meter	-	6404 sq. meters	15 Classrooms	Concrete	PooD	No	ю	Ξ	Moderate
Barra	Bridge	HSA	4	>1 Meter	N/A	N/A	20 Tons	Concrete	P005	Yes	-	4	Low
Bonbon	Senior Citizen Building	HSA	4	>1 Meter	2	50 sq meters		Mixed	Poor/needs major repair	o N	м	12	High
Bonbon	Health Center	MLSA	2	<1 Meter	-	75 sq. meters	4 Bed Capacity	Concrete	Poop	N 0	2	4	Low
Bonbon	Elementary School	HSA	4	>1 Meter	-	10000 sq meters	6 Classrooms	Wood	needs repair	No	м	12	High
Bonbon	Day Care Center	HSA	4	>1 Meter	2	50 sq meters		Mixed	Poor/needs major repair	No N	2	œ	Moderate
lgpit	Foot Bridge	HSA	4	>1 Meter	N/A	N/A	3 Tons	Steel Centered Cable Wire	Needs minor repair	No	м	12	High
lgpit	Elementary School	MLSA	2	<1 Meter	-	23986 sq. meters	8 Classrooms	Mixed	needs repair	o N	2	4	Low
lgpit	Day Care Center	HSA	4	>1 Meter	-	50 sq meters		Concrete	Poor	8	м	12	High
ong Bonbon	Luyong Bonbon Health Center	MLSA	2	<1 Meter	-	75 sq. meters	4 Bed Capacity	Wood	Poor	N _O	2	4	Low
Luyong Bonbon	Day Care Center	MLSA	2	<1 Meter	-	50 sq meters		Wood	Poor	No	2	4	Low
Poblacion	Municipal Legislative Building	MLSA	2	<1 Meter	2	250 sq.meters		Concrete	Poog	Yes	-	2	Low
Poblacion	Municipal Hall	MLSA	2	<1 Meter	2	400 sq meters		Concrete	Poop	Yes	-	2	Low
Taboc	Senior Citizen Building	MLSA	2	<1 Meter	_	50 sq meters		Concrete	Needs repair	N _O	-	2	Low
Taboc	Rural Health Center	MLSA	2	<1 Meter	-	150 sq meters	6 Bed Capacity	Concrete	Poop	Yes	-	2	Low
Taboc	Day Care Center	HSA	4	>1 Meter	_	100 sq meters		Concrete	Poop	N N	ю	12	High
Taboc	Bridge	HSA	4	>1 Meter	N/A	N/A	15 Tons	Concrete	Poop	Yes	-	4	Low

Sub Task 5.4.5.1 Derive the Lifeline Utilities Risk Score

Taking off from the severity of consequence table (table 3.5.3e) add two columns that will contain the risk scores and risk categories. Multiply the likelihood occurrence with the average severity of consequence score derived from the previous step (refer to Table 3.5.4e). The risk score will provide an indicative index of risk.

Sub Task 5.4.4.2. Reclassify the risk scores into risk categories

Based on the recommended risk scores and corresponding risk categories (Table 3.5.4), reclassify risk scores into risk categories (refer to Table 3.5.4e).

Sub Task 5.4.4.3. Prepare Risk Maps

Prepare the critical point facility risk map indicting the risk level (i.e. High, Moderate Low) per facility. These should guide the identification of facilities for a particular hazard where issues and concerns can be articulated and the general policy directions and options can be identified and enumerated (refer to figure 3.5.2e).

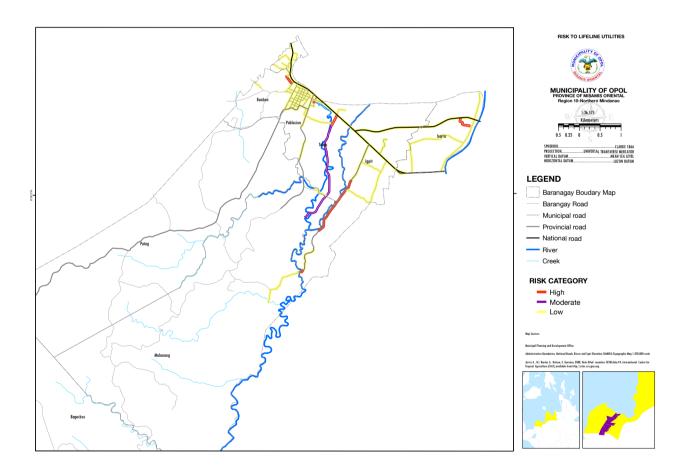


Figure 3.5.2e Risk to Lifeline Utilities, Floods, Municipality of Opol

Table 3.5.4e Lifeline Utilities Risk to flood, Municipality of Opol.

∢	~	U	Ω	ш	u.	ט	Ŧ	-	_	¥	0	۵	o
Name	Classificatio n	Flood Susceptibil ity	Likelihoo d of Occurren ce Score	Expected Flood Depth	Replacemen t Cost	Affecte d Distanc e (Linear Kilomet ers)1	Affected Value ²	Surface Type	Existing Condition	Hazard Resistant Design	Severity of Consequence Score_Average	Risk Score	Risk Category
							G*F				= (L+M+N)/3	0 X D=	
National highway to Narulang road	Provincial road	HSA	4	>1 Meter	18,000,000	1.62	1.62 29,165,40 ¹ Concrete/ Gravel	Concrete/ Gravel	Needs minor repair	0 N	æ	12	High
National highway to Pag- lbig Citi Homes	Barangay Road	MLSA	2	<1 Meter	11,036,000	2.55	2.55 28,192,56	Concrete/ Gravel	Poor	N N	2	4	Low
Metro Cagayan road	National road	HSA	4	>1 Meter	23,000,000	2.11	48,424,20	Concrete	Poop	Yes	-	4	Low
Metro Cagayan road	National road	MLSA	2	<1 Meter	23,000,000	0.92	21,107,100	Concrete	Poop	Yes	-	2	Low
National highway	National road	HSA	4	>1 Meter	23,000,000	1.66	38,288,10	Concrete	Poop	Yes	-	4	Low
National highway	National road	MLSA	2	<1 Meter	23,000,000	2.81	64,692,10\ Concrete	Concrete	Poop	Yes	-	2	Low
National highway to Narulang road	Provincial road	MLSA	2	<1 Meter	18,000,000	1.64	1.64 29,469,60 ⁽ Concrete	Concrete	Poop	Yes	-	2	Low
National highway to Pag- Ibig Citi Homes	Barangay Road	HSA	4	>1 Meter	11,036,000	0.29	3,180,575	Concrete	Needs minor repair	Yes	m	12	High
Poblacion to Limunda road	Provincial road	HSA	4	>1 Meter	18,000,000	0.09	0.09 1,699,200	Concrete	Poop	Yes	-	4	Low
Poblacion to Limunda road	Provincial road	MLSA	2	<1 Meter	18,000,000	1.03	18,511,20	Concrete	Poop	Yes	-	2	Low
roan road	Barangay Road	HSA	4	>1 Meter	11,036,000	0.31	3,467,511	Concrete	Poop	Yes	-	4	Low
Main Water Distribution Line	Government	HSA	4	>1 Meter	N/A	2.10	N/A	Steel	Poop	Yes	-	4	Low
Main Water Distribution Line	Government	MLSA	2	<1 Meter	N/A	3.29	N/A	Steel	Pood	Yes	-	2	Low

Task 5.5 Analyze Adaptive Capacities

Analyze indicators to describe the adaptive capacities/characteristics of the exposed elements to implement the necessary interventions to anticipate and reduce risks an/or cope and anticipate potential risks. Also, the level of adaptive capacities would influence the type of risk management and adaptation options in the form of spatial policy interventions such as relocation (minimizing exposure), rezoning of existing urban use areas to production based, and open space development and strict protection land uses, establishment of structural mitigation measures (flood control, sea wall, slope stabilization) including the debt servicing capacity of the Local Government Unit, and imposition of hazard resistant structural design regulations that would encourage urban resiliency including the potential conformance of proponents and local inhabitants (and the costs associated to conform) to said restrictions/regulations.

Highlight important adaptive capacity assessment for the various exposure units gathered in the exposure database and include them in the preparation of summary risk assessment matrix to be prepared in the succeeding step. LGUs can further expound on the level of adaptive capacities of specific areas through public consultation.

Task 5.6. Identify the decision areas and prepare a summary disaster risk assessment matrix

Based on the risk maps and risk assessment tables generated for the various exposure units, highlight and identify decision areas or elements. Decision areas can be a specific site in the locality or an area cluster (i.e coastal areas). These can be enumerated in column A (Tables 3.5.5a-3.5.5e) including a description of the area in column A1.

List down the technical findings by describing the area or element in terms of the level of risk and the various contributing factors such as hazard, exposure, vulnerability (severity of consequence) and level of adaptive capacities. The technical findings can be derived from the working tables prepared in the previous steps. These can be listed down in column B. Technical findings can be identified derived from the working table in the The technical findings shall be used to inform the risk/vulnerability evaluation and guide the identification of the implications when risks are not addressed and the policy interventions/recommendations.

A sample Disaster Risk Assessment Summary table per exposure unit is presented below (Tables 3.5.5a-3.5.5e). Note: LGUs can limit and focus on important high to moderate risk areas or areas where the the severity of consequence range from very high to high regardless of the risk level (mainly applicable for seismic and volcanic related hazards where the severity of consequence are considered catastrophic/disastrous) when identifying the various decision areas.

Table 3.5.5a Sample Risk Disaster Risk Assessment Summary Matrix for Population, Flood

Decision Area/s	Decision Area Description	Technical Findings
Α	A1	В
Barra	Residential areas located along the Iponan River and portions located along the coast/river mouth	 Population risk categorized as high; Around 6,838 individuals are exposed to high susceptibility floods. Only a portion have access to Early warning systems Roughly 44% of the population are below the poverty threshold; LGU does not have enough resources to implement flood control works along Iponan River. External assistance from national or regional government agencies will be required. Imposition of hazard resistant structural design regulations may be difficult considering the income level of the majority of the population; Relocation of residential areas can be identified within the Municipality; LGU can pursue land banking to accommodate potential zonal changes from residential to non-residential urban use areas; Early warning systems and the preparation of flood contingency plans can be pursued by the local government to minimize potential fatalities and injuries;
Bonbon	Low lying residential areas located along coastal zone of the Barangay.	 Roughly 1934 individuals exposed to floods (360 in high susceptible areas/1574 in moderate to low susceptible areas) Risk to population categorized as moderate Approximately 38% of households are below the poverty threshold Approximately 587 individuals living in houses with walls made from light, makeshift and salvageable materials; Approximately 60 informal settler individuals (15 households); LGU does not have enough resources to pursue a total relocation policy. External assistance from national or regional government agencies will be required. Imposition of hazard resistant structural design regulations may be difficult considering the income level of the majority of the population; Relocation of residential areas can be identified within the Municipality; LGU can pursue land banking to accommodate potential zonal changes from residential to non-residential urban use areas; Exiting evacuation sites are enough to accommodate expected severely affected families, however, additional evacuation sites may be needed in the future; Early warning systems and the preparation of flood contingency plans can be pursued by the local government to minimize potential fatalities and injuries;

Table 3.5.5b Sample Disaster Risk Assessment Summary Matrix Natural Resource Production Areas, Floods

Decision Area/s	Description	Technical Findings
Α	A1	В
Barra	Fishpond production areas located adjacent to the coast	 Approximately 19 hectares of fishpond areas exposed to high to moderate floods; Areas categorized as moderate risk to damage; Existing fish pens susceptible to severe damage due to floods; 60% of areas not covered by insurance; No flood control measures in place; Fisher-folks do not practice sustainable/climate proofed fishing techniques;
lgpit	Fishpond production areas located adjacent to the coast	 A significant portion of the inland fisheries sub-sector are classified as high risk areas. Fisher-folks do not practice sustainable/climate proofed fishing techniques; Existing fish pens susceptible to severe damage due to floods. 80% of fish production areas do not have insurance; No flood control measures in place;
Taboc	Crop production areas located in the flood plains transected by the Bungcalalan river	 Risk is categorized as high on agricultural crop production; Approximately 32 hectares exposed to high susceptible areas, and 103 hectares susceptible to moderate to low floods. severity of damage considered high; Estimated value in terms of replacement cost exposed is 11.2 million pesos; Crop types are predominantly cultivated crops; A significant portion of the population are engaged in farming; Majority of the farmers do not practice climate proofed production techniques; No early warning systems in place; Majority of the areas are not covered by crop insurance

Table 3.5.5c Sample Disaster Risk Assessment Summary Matrix Urban Use Area, Floods

Decision Area/s	Description	Technical Findings
Α	A1	В
Barra - Commercial and Residential areas	Existing commercial and residential areas along the Iponan river	 The area is located along the Iponan river; These are areas within the high susceptible flood areas, with an estimated flood height of > 1 meter. The estimated likelihood of occurrence is 10-30 years; Only a tenth of the structures are made from light to makeshift materials, roughly 153 individuals or 38 structures; Only 20% have property insurance; Majority of the structures have first floors below the estimated flood depth. Risk to property damage range from high to moderate. Hazard resistant restrictions can be imposed to designated non-residential areas but will be difficult to implement for residential areas; Imposing river easements for lots located adjacent to the river can be pursued;
Igpit - Tourism Areas	The area is located along the coast adjacent to the Macajalar Bay;	 These are areas within the high susceptible flood areas, with an estimated flood height of > 1 meter. The estimated likelihood of occurrence is 10-30 years; The major Tourism Areas of the Municipality are located in this area; Tourism structures are predominantly made from light materials; Hazard resistant design regulations can be pursued in the area;
lgpit - Informal settler settlements	The area is located along the coast adjacent to the Macajalar Bay;	 These are areas within the high susceptible flood areas, with an estimated flood height of > 1 meter. The estimated likelihood of occurrence is 10-30 years; Informal settler areas are at high risk to flooding with disastrous consequences; Potential increase in exposed population will be expected due to unregulated growth of informal settler families; There is consensus among informal settler families that relocation will be needed; LGU does not have the capacity to relocate all informal settler families within the a short term period. External assistance will be required; Relocation sites can be identified within the municipality to accommodate affected families;

Table 3.5.5d Sample Disaster Risk Assessment Summary Matrix Critical Point Facilities, Floods

Decision Area/s	Description	Technical Findings
Α	A1	В
lgpit Day Care Center	Located near the Bungcalalan River	 50 sq. meters exposed to floods of >1 meter occurring every 10-30 years (Hazard-Exposure); Building is concrete but in poor condition (Vulnerability); Structure does not employ hazard mitigation design (Vulnerability); No property insurance coverage (Vulnerability); LGU would have available funds to purchase lots and construct new day care centers in future (Adaptive Capacity);
Bonbon Senior Citizen Building	Flood plains located in Barangay Bonbon	 50 sq. meters exposed to floods of >1 meter occurring every 10-30 years (Hazard-Exposure); Building is made from mixed wood and concrete but in poor condition (Vulnerability); Structure does not employ hazard mitigation design (Vulnerability); No property insurance coverage (Vulnerability); LGU would have available funds to purchase lots and construct new senior citizen buildings in future (Adaptive Capacity);
Bonbon elementary school	Flood plains located in Barangay Bonbon	 Six classrooms with an estimated area of school site area of 10,000 square meters eposed to floods of >1 meter occurring every 10-30 years (Hazard-Exposure); Made from mixed wood and concrete requiring major repairs; Facility does not employ hazard mitigation design; Facility not covered by insurance; New school sites can be established; Site can be rezoned to commercial uses where proponents will have the financial capacity to conform to hazard mitigation design regulations;

Table 3.5.5e Sample Disaster Risk Assessment Summary Matrix Lifeline Utilities

Area Name	Description	Technical Findings
Α	A1	В
National highway to Narulang road	Primary access road leading to the Malingin Area	 Categorized as high risk 1.62 Kilometers exposed to high susceptible flood areas, with an estimated flood height of > 1 meter. The estimated likelihood of occurrence is 10-30 years; Surface type is mixed gravel and concrete; Disruption of access system may last for five days affecting settlements and production areas; LGU does not have the capacity to pursue road improvement related projects, external assistance may be required;
National highway to Pag-Ibig Citi Homes	Main access road leading to the Pag-ibig Citi-Homes residential areas and crop production areas	 Categorized as high risk 0.29 Kilometers exposed to high susceptible flood areas, with an estimated flood height of > 1 meter. The estimated likelihood of occurrence is 10-30 years; Surface type is concrete requiring minor repairs; Disruption of access system may last for five days affecting settlements and production areas; LGU does not have the capacity to pursue road improvement related projects, external assistance may be required;

Task 5.7 Identify Policy Interventions to reduce risks to acceptable risks

From the summary risk assessment matrix for the various exposure units prepared in the previous steps, the derived level of risks for each exposure unit/area are good indication of the level of priority where interventions should be implemented to reduce to tolerable or acceptable levels. In this guideline, the type of risk management options/ interventions should seek to achieve the reduction of risks that are below the thresholds for declaring a state of calamity for each exposure type (refer to Table 3.5.6) where the Highly Unacceptable threshold was based on the the NDDRMC (through the NDCC Memorandum Order No 4. series of 1998, items 4a-b, items a. to b.) criteria for declaring a state of calamity covering the minimum percentage of severely affected population, minimum percentage damage to means of livelihood, minimum duration of disruption in the flow of transport and commerce (i.e roads and bridges), minimum percentage damage to agriculture based products, and duration of disruption of lifeline facilities (i.e electricity, potable water systems, communication). LGUs should be guided by the acceptability ratings and threshold levels to guide land use policy and strategy decisions and ensure that the level of risks are within acceptable or tolerable levels. The policy interventions to be identified shall be in the form of risk management options such risk reduction through elimination/ prevention (relocation of at risk elements), risk mitigation (imposing hazard resistant design regulations, hard and soft risk mitigation measures, establishment of redundant systems, and disaster preparedness), and risk transfer (encouraging the use of risk transfer instruments such as property or crop insurance).

Table 3.5.6 Disaster thresholds and level of acceptability per exposure type

		Dicar	ster Thresholds/Exposure	Unit	
Acceptability Rating	Urban Areas	Population	Resource Production Areas	Critical Points	Lifelines
Highly Unacceptable	≥20% of exposed buildings are severely damaged	More than 20% of the population are affected and in need of immediate assistance. Cases of deaths of 10 or more and/or injuries of 100 or more.	More than 40% of exposed production areas/means of livelihood such as fishponds, crops, poultry and livestock and other agricultural/forest products are severely damaged;	Damages leads to the disruption of services which may last one week or more	Disruption of service lasting one week or more (for Municipalities) and one day for Highly Urbanized Areas
Highly Intolerable	>10-20% of exposed buildings are severely damaged	>10 - <20% of affected population in need of immediate assistance. 1-10 deaths and or 10 or 100 injuries	20-<40% of exposed production areas/means of livelihood such as fishponds, crops, poultry and livestock and other agricultural/forest products are severely damaged;	Disruption of services which may last three days to less than a week	Disruption of service by approximately five days for municipalities and less than 18 hour disruption for highly urbanized areas
Tolerable	>5-10% of buildings areas are severely damaged	>5%-10% of affected population in need of immediate assistance. 1-10 cases of injuries.	5-<20% of exposed production areas/means of livelihood such as fishponds, crops, poultry and livestock and other agricultural/forest products are severely damaged;	Disruption of service lasting for one day to less than three days	Disruption of service by approximately three days for municipalities and less than six hour disruption for highly urbanized areas
Acceptable	≦5% and above of buildings are severely damaged	≤5% of the affected population in need of immediate assistance. Cases of minor injuries	≤5% and below of of exposed production areas/ means of livelihood such as fishponds, crops, poultry and livestock and other agricultural/forest products are severely damaged;	Disruption of service lasting less than one day	Disruption of service by approximately one day for municipalities and less than six hour disruption for highly urbanized areas

Sub-task 5.6.1 Identify the development implications

Taking off from the risk and vulnerability evaluation matrix (Tables 3.5.6a-3.5.6e), add two columns for the implications and the policy interventions. Expound on the possible future scenario if the Municipality/City adopts a "business as usual" strategy given the identified risks and vulnerabilities (refer to tables 3.5.6a-3.5.6e). Enumerate the Implications which can be statements related to development issues, concerns and problems which needs to be addressed moving forward (Column C).

Sub-task 5.6.2. Identify the various policy interventions

Based on the implications identified, identify the possible policy interventions that the LGU should pursue to address such the various issues (refer to tables 3.5.6a-3.5.6e). These can be in the form legislation-spatial based policies or programs, projects and activities to reduce exposure, reduce vulnerability and increase adaptive capacity (Column D). Policy interventions should seek to reduce the level of risks to acceptable levels whenever possible or reduce risks to tolerable levels considering the costs, time and effort to implement them. When risk levels can not be significantly reduced to acceptable or tolerable levels, consider relocation or changing the land uses where the cost for mitigation, time and effort needed to implement them are sustainable in the long-term (i.e. residential areas to park and open spaces to reduce exposure, residential to commercial where the costs associated with the imposition of hazard resistant design regulations can be transferred to proponents with higher adaptive capacities).

Table 3.5.6a Sample Issues Matrix for Population

	rable biblioa ballip	ne issues matrix for Population	
Decision Area Name	Technical Findings	Implications	Policy Interventions
Barra	 Population risk categorized as high; Around 6,838 individuals are exposed to high susceptibility floods. Only a portion have access to Early warning systems Roughly 44% of the population are below the poverty threshold; LGU does not have enough resources to implement flood control works along Iponan River. External assistance from national or regional government agencies will be required. Imposition of hazard resistant structural design regulations may be difficult considering the income level of the majority of the population; Relocation of residential areas can be identified within the Municipality; LGU can pursue land banking to accommodate potential zonal changes from residential to non-residential urban use areas; Early warning systems and the preparation of flood contingency plans can be pursued by the local government to minimize potential fatalities and injuries; 	 Potential deaths and injuries due to lack of early warning system, makeshift houses especially in areas located along the Iponan River and coastal areas; Significant government resources will be allocated for rescue and relief operations Required post disaster assistance for affected families/individuals far exceeds available local financial resources Available livelihood opportunities are not enough to accommodate affected families 	 Implement a mandatory relocation policy on structures/dwellings within the 20 meter coastal and river easements. Establish open spaces, recreation or parks along the iponan river Relocation of informal settlers Develop regulations with emphasis on hazard resistant design. Mandatory retrofitting of existing structures; Establishment of Early Warning System. Formulation of flood contingency plan; Provision of comprehensive housing program for affected families Livelihood program for families below the poverty threshold; Pursue watershed rehabilitation to minimize surface water run-off in low lying areas;
Bonbon	 Roughly 1934 individuals exposed to floods (360 in high susceptible areas/1574 in moderate to low susceptible areas) Risk to population categorized as moderate Approximately 38% of households are below the poverty threshold Approximately 587 individuals living in houses with walls made from light, makeshift and salvageable materials; Approximately 60 informal settler individuals (15 households); LGU does not have enough resources to pursue a total relocation policy. External assistance from national or regional government agencies will be required. Imposition of hazard resistant structural design regulations may be difficult considering the income level of the majority of the population; Relocation of residential areas can be identified within the Municipality; LGU can pursue land banking to accommodate potential zonal changes from residential to non-residential urban use areas; Exiting evacuation sites are enough to accommodate expected severely affected families, however, additional evacuation sites may be needed in the future; Early warning systems and the preparation of flood contingency plans can be pursued by the local government to minimize potential fatalities and injuries; 	 Potential deaths and injuries due to lack of early warning system, makeshift houses especially in areas located along the Iponan River and coastal areas; Significant government resources will be allocated for rescue and relief operations Required post disaster assistance for affected families/individuals far exceeds available local financial resources Available livelihood opportunities are not enough to accommodate affected families 	 Establish open spaces, recreation or parks along the coastal areas; Relocation of informal settlers Develop regulations with emphasis on hazard resistant design. Retrofitting of existing structures Establishment of Early Warning System. Formulation of flood contingency plan; Provision of comprehensive housing program for affected families Livelihood program for families below the poverty threshold Identify additional residential areas within safer areas; Pursue watershed rehabilitation to minimize surface water run-off in low lying areas; Change the mix of land use from residential to other uses that would encourage the reduction of exposure;

Table 3.5.6b Sample Issues Matrix Natural Resource Production Areas

	Table 5.5.0b Sample	e Issues Matrix Natural Resource Produc	uon Arcas
Decision Area/s	Technical Findings	Implications	Policy Interventions
Α	В	С	D
Bonbo n	 Approximately 19 hectares of fishpond areas exposed to high to moderate floods; Severity of damage ranges from low to high Areas categorized as moderate risk to damage; Existing fish pens susceptible to severe damage due to floods; 60% of areas not covered by insurance; No flood control measures in place; Fisher-folks do not practice sustainable/climate proofed fishing techniques; 	 dependent families also expected Government resources may be redirected to for addressing short term needs of affected families No available alternative livelihood to 	 Climate proofing of fish pen areas; Provision of alternative livelihood; Establishment of mangrove buffers to protect existing fish cages; Encourage insurance Improve forest cover in the Bungcalalan watershed area Establishment of early warning system Extension services for climate sensitive inland fishery production
lgpit	 A significant portion of the inland fisheries sub-sector are classified as high risk areas. Fisher-folks do not practice sustainable/climate proofed fishing techniques; Existing fish pens susceptible to severe damage due to floods. 80% of fish production areas do not have insurance; No flood control measures in place; 	 Significant economic losses in the inland fishery sector expected; Increased poverty among inland fishing dependent families also expected Government resources may be redirected to for addressing short term needs of affected families No available alternative livelihood to accommodate expected affected families 	 Provision of alternative livelihood; Establishment of mangrove buffers to protect existing fish cages; Encourage insurance Improve forest cover in the Bungcalalan water shed area Establishment of early warning system
Taboc	 Risk is categorized as high on agricultural crop production; Approximately 32 hectares exposed to high susceptible areas, and 103 hectares susceptible to moderate to low floods. severity of damage considered high; Estimated value in terms of replacement cost exposed is 11.2 million pesos; Crop types are predominantly cultivated crops; A significant portion of the population are engaged in farming; Majority of the farmers do not practice climate proofed production techniques; No early warning systems in place; Majority of the areas are not covered by crop insurance 	 Damages to crops is expected to be high due to floods given current production practices. Significant portion of the population are dependent on crop production. The lack of alternative livelihood contributes to sensitivity and adaptive capacities of farmers. Lack of flood control measures, may affect production yields over time. Existing forest cover of the Bungcalalan and Opol River Watershed is estimated at 40-50%. Lack of forest cover may contribute to low land flooding. 	 Extension services for climate sensitive crop production Encourage the use of flood resistant crop varieties Encourage crop insurance Establishment of early warning system for crop production Improve forest cover in watershed areas contributing to buncalalan and opol rivers Establishment of field demonstration farms to facilitate technology transfer on climate/hazard sensitive crop production. Provision of alternative livelihoods Encourage the planting of high value crops.

Table 3.5.6c Sample Issues Matrix Urban Use Areas

Decision Area/s	Technical Findings	Implications	Policy Interventions
Α	В	С	D
Barra - Commerci al and Residenti al areas	 The area is located along the Iponan river; These are areas within the high susceptible flood areas, with an estimated flood height of > 1 meter. The estimated likelihood of occurrence is 10-30 years; Only a tenth of the structures are made from light to makeshift materials, roughly 153 individuals or 38 structures; Only 20% have property insurance; Majority of the structures have first floors below the estimated flood depth. Risk to property damage range from high to moderate. Hazard resistant restrictions can be imposed to designated non-residential areas but will be difficult to implement for residential areas; Imposing river easements for lots located adjacent to the river can be pursued; 	 Significant structural damage to residential areas and informal settler areas are expected. Death and injuries are also expected if no preemptive evacuation is implemented during extreme rainfall events. Lack of flood resistant design regulations and increase exposure due to natural expansion leading may lead to increased risks if not immediately addressed covering residential and commercial areas. There is a need to identify additional residential areas to accommodate informal settler families for relocation Increased frequency of extreme rainfall events may result to significant property damage Potential impacts the local economy will be severe due to economic disruption affecting commercial and tourism establishments. 	 Implement a mandatory relocation policy on structures/dwellings within the 20 meter coastal and river easements along the iponan river. Set aside areas for open spaces, recreation or parks. Relocation of informal settlers Provision of comprehensive housing program for affected families Develop regulations with emphasis on hazard resistant design. Impose a low density development in areas prone to high levels of flooding. Mandatory Retrofitting of existing structures within a period of 10 years. Promote property insurance for dwelling units located in highly susceptible areas. Limit further settlement growth in areas within highly susceptible areas. Coordinate with Cagayan de Oro City for the rehabilitation of the Iponan River Watershed Conduct site specific flood hazard mapping as basis for the establishment of structural design regulations
lgpit - Tourism Areas	 The area is located along the coast fronting the Macajalar Bay; These are areas within the high susceptible flood areas, with an estimated flood height of > 1 meter. The estimated likelihood of occurrence is 10-30 years; The major Tourism Areas of the Municipality are located in this area; Tourism structures are predominantly made from light materials; Hazard resistant design regulations can be pursued in the area; 	 Damages and disruption of tourism related facilities; Detrimental impacts to the economy and the property owners; 	 Mandatory Retrofitting of structures within 15 years Imposition of hazard resistant design standards/regulations within flood susceptible areas. Promote property insurance located in highly susceptible areas. Conduct site specific flood hazard mapping as basis for the establishment of structural design regulations; Combine mangrove/wetland rehabilitation/restoration with eco-tourism development; Minimize exposure through low density tourism development;
lgpit - Informal settler settlemen ts	 The area is located along the coast fronting the Macajalar Bay; These are areas within the high susceptible flood areas, with an estimated flood height of > 1 meter. The estimated likelihood of occurrence is 10-30 years; Informal settler areas are at high risk to flooding with disastrous consequences; Potential increase in exposed population will be expected due to unregulated growth of informal settler families; There is consensus among informal settler families that relocation will be needed; LGU does not have the capacity to relocate all informal settler families within the a short term period. External assistance will be required; Relocation sites can be identified within the municipality to accommodate affected families; 	 Potential deaths and injuries due to lack of early warning system and makeshift houses especially in zone 1, 2, and 5 Lack of monitoring may result in increased exposure due to increase in informal settler families in the area; Isolation of families have been observed in the past, Significant government resources will be allocated for rescue and relief operations Required post disaster assistance for affected families/individuals far exceeds available local financial resources Available livelihood opportunities are not enough to accommodate affected families. 	 Set aside areas for open spaces, recreation or parks. Relocation of informal settlers Provision of comprehensive housing program for affected families Establishment of early warning systems and formulation of flood contingency plans

Table 3.5.6d Sample Issues Matrix Critical Point Facilities

Area Name	Technical Findings	Implications	Policy Interventions
Α	В	С	D
lgpit Day Care Center	 50 sq. meters exposed to floods of >1 meter occurring every 10-30 years (Hazard-Exposure); Building is concrete but in poor condition (Vulnerability); Structure does not employ hazard mitigation design (Vulnerability); No property insurance coverage (Vulnerability); LGU would have available funds to purchase lots and construct new day care centers in future (Adaptive Capacity); 	 Significant damage is expected to the Igpit day Care Center Possible deaths or injuries expected if The Day care center is used as an evacuation center; Potential inadequacies in the provision of day care services expected in the Barangay; 	 Establishment of new day care center that will service the Igpit area in a more suitable area. Property insurance coverage for the existing Igpit Day Care Center When the igpit Day Care center is significantly damaged by floods, consider relocating the service to a more suitable site.
Bonbon Senior Citizen Building	 50 sq. meters exposed to floods of >1 meter occurring every 10-30 years (Hazard-Exposure); Building is made from mixed wood and concrete but in poor condition (Vulnerability); Structure does not employ hazard mitigation design (Vulnerability); No property insurance coverage (Vulnerability); LGU would have available funds to purchase lots and construct new senior citizen buildings in future (Adaptive Capacity); 	 Significant damage is expected; Potential inadequacies or significant service disruption in the provision of services for senior citizens expected in the Barangay; Retrofitting and maintaining the structure may be costly in the long run, costs can be redirected for the establishment of a new facility; 	 Establishment of new a new senior citizen building that will service the Bonbon area in a more suitable area. Property insurance coverage for the existing facility; When the building is significantly damaged by floods, consider relocating the service to a more suitable site.
Bonbon elementary school	 Six classrooms with an estimated area of school site area of 10,000 square meters exposed to floods of >1 meter occurring every 10-30 years (Hazard-Exposure); Made from mixed wood and concrete requiring major repairs; Facility does not employ hazard mitigation design; Facility not covered by insurance; New school sites can be established; Site can be rezoned to commercial uses where proponents will have the financial capacity to conform to hazard mitigation design regulations; 	 Moderate damage is expected to the Igpit day Care Center, resulting to disruption in educational services in the area. Possible deaths or injuries expected if the igpit elementary school is used as an evacuation center; Potential future inadequacies in the provision of primary level educational services expected in the Barangay 	 Retrofit the existing school structure. Future expansion should be located in more suitable areas servicing the Bonbon Area.

Table 3.5.6e Sample Issues Matrix Lifeline Utilities, Flood Hazard

Area Name	Technical Findings	Implications	Policy Interventions
National highway to Narulang road	 Categorized as high risk 1.62 Kilometers exposed to high susceptible flood areas, with an estimated flood height of > 1 meter. The estimated likelihood of occurrence is 10-30 years; Surface type is mixed gravel and concrete; Disruption of access system may last for five days affecting settlements and production areas; LGU does not have the capacity to pursue road improvement related projects, external assistance may be required; 	 Temporary isolation of communities due to long-term disruption of the access system during floods Poses difficulty in evacuation and response making which may lead to deaths and injuries in isolated areas; Major disruption in the transportation of agricultural produce resulting to potential loses; 	 Strategic establishment of alternate/escape routes leading to relatively safer areas; Climate proofing of existing route through road and drainage upgrading in coordination with NGAs; Pre-emptive evacuation of areas that will be potentially isolated during floods. Formulation of flood contingency plans targeting potentially affected communities;
National highway to Pag-Ibig Citi Homes	 Categorized as high risk 0.29 Kilometers exposed to high susceptible flood areas, with an estimated flood height of > 1 meter. The estimated likelihood of occurrence is 10-30 years; Surface type is concrete requiring minor repairs; Disruption of access system may last for five days affecting settlements and production areas; LGU does not have the capacity to pursue road improvement related projects, external assistance may be required; 	 Temporary isolation of communities due to disruption of the access system during floods; Poses difficulty in evacuation and response making which may lead to deaths and injuries in isolated areas; Major disruption in the transportation of agricultural produce resulting to potential loses; 	 Strategic establishment of alternate routes access systems leading the relatively safer areas; Climate proofing of existing route through road and drainage upgrading in coordination with NGAs; Pre-emptive evacuation of areas that will be potentially isolated during floods. Formulation of flood contingency plans targeting potentially affected communities;

Step 6. Summarize Findings

Objectives:

- To identify major decision areas based on the combined risks and vulnerabilities;
- To identify a menu of disaster risk reduction and climate change adaptation options within major decision areas.

Outputs:

• Identified major decision areas and list of risk management and adaptation/mitigation measures;

Process:

Task 6.1 Identify major decision areas;

Task 6.2 Further detail the identified policy interventions;

Step 6.1 Identify major decision areas

Major decision areas are specific sites within the municipality where level of risks to hazards can be exacerbated by vulnerability to climate change. Identification of major decision areas can be facilitated through by overlying risk and vulnerability maps (refer to figure 3.6.1) or can be tabular in approach especially when certain sites are consistently regarded as decision areas during the disaster risk assessment and climate change vulnerability assessment (table 3.6.1).

Step 6.2 Further detailing of policy interventions

Risk management options identified during the risk and vulnerability assessments may differ in approach. This step will ensure consistency of policy interventions to address a particular major decision area. Based on the identified major decision areas in step 6.1, review and compare the identified policy interventions in the summary risk and vulnerability assessments. Select the appropriate policy interventions using a multi-hazard and climate change perspective to address both risks and vulnerabilities. Refer to table 3.6.1 for a sample worksheet.

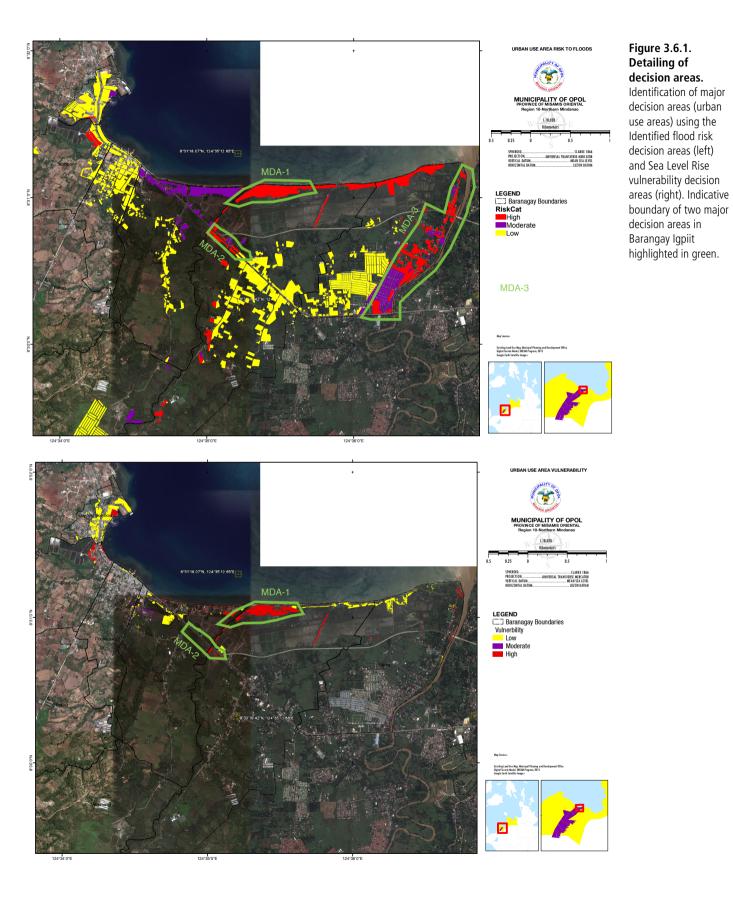


Table 3.6.1 Sample Issues Matrix Urban Use Areas

Α	В	C	D D	E
Decision Area/s	Description	Problems/Hazards	Impacts/Implications	Policy Interventions
Igpit - Informal settler areas (MDA-1)	Area located at the mouth of the Bungcalalan River adjacent to the Macalajar Bay	Areas prone to riverine and coastal flooding, potential area submersion to due to sea level rise in the long term. Changes in tidal patterns may impact storm surge patterns specifically wave heights and inland inundation. Note: Risks to other hazards can be incorporated to describe the area for a more comprehensive and multihazard approach in identifying policy interventions/recommendations	 Severe potential damages to residential structures due to floods. Potential submersion of settlements due to sea level rise in the long term. Potential isolation of communities, injuries and casualties during floods and, storm surges; Establishment of sea walls and mitigation measures to retain current land uses will be costly, costs can not be shouldered by affected families and the LGU; Future uncontrolled growth of settlements may increase exposure and risks; 	 Relocation of informal settler families, employ managed retreat or incremental relocation; Establishment of early warning systems and formulation of flood contingency plans to minimize potential injuries and casualties during the implementation of relocation; Identification of additional 9.29 hectares of residential to accommodate potentially affected families and provision of comprehensive housing program for affected families especially the informal settlers; Designating areas for wetland and mangrove restoration and serve as part of the ecotourism network; New transportation systems will not be pursued in the area to discourage future settlement growth;
Barra Riverside Settlement areas (MDA-3)	Major growth area with mixed land uses located along the Iponan River	Mainly riverine flooding along the Iponan River with sea level rise near the river mouth	 Potential severe damage to settlement areas and possible deaths and injuries along the riverside areas due to floods; Potential submersion of settlements due to sea level rise in the long term especially along the river mouth; Riverbank erosion and possible failure of riverbank slopes affecting structures; Future growth in the area may increase exposure and risks if no interventions are implemented; 	 Establishment of expanded easements along the river side and changing these areas for open space development; Mandatory relocation of structures within the expanded easements and sea-level rise impact area; Low density development shall be employed within highly susceptible prone areas to minimize the level exposure; Change the land use mix from residential to commercial or any land use mix where cost for effective mitigation can be shouldered by proponents/developers; Development of settlement areas shall be subject to development restrictions with emphasis on the imposition of hazard resistant design regulations; Mandatory retrofitting of structures within a period of 10 years; All costs related to the establishment of mitigation measures such as riverbank protection structures shall be shouldered by the property owners through the imposition of special levy taxes; Establishment of early warning systems and formulation of flood contingency plans to minimize potential injuries and casualties Conduct of site specific flood modeling studies to inform development regulations;

Formulating a Risk Sensitive Land Use Plan

4

Integrating climate and disaster risks to enhance the CLUP formulation process

This chapter shall demonstrate the integration of climate and disaster risks in the various stages of the CLUP formulation process. Risk and vulnerability related information articulated in the Climate and Disaster Risk Assessment hopes to enrich the analysis of the planning environment through the sectoral studies emphasizing on the spatial/area implications of risks and vulnerabilities related to hazards and climate change, and identification of the development challenges and the possible interventions for mitigation and adaptation. These are reflected in the vision statement of the locality, strategic goals and objectives for development, the evaluation and selection of a preferred long term development thrust and spatial strategy, detailing a land use plan through the identification and application of of spatial management policies for addressing current and preventing future risks and vulnerabilities to natural hazards and anticipating the potential threats of climate change.

Set the Vision

Mainstreaming climate and disaster risks in the vision statement involves the integration climate change adaptation and and disaster risk reduction concepts/principles in describing the ideal state of locality in terms of the people as individuals and society, local economy, built and natural environment, and local governance. These can either be expressed as vision descriptors or success indicators benefiting from technical findings derived from the climate and disaster risk assessment.

One of the preferred tools in visioning is the Vision-Reality Gap Matrix, where descriptors are identified for each vision element and a qualitative rating on the current level of achievement is conducted. It has to be noted that the review of the Vision-Reality gap analysis will be better if the information on disaster risks and climate change vulnerabilities are prepared prior to the analysis. Vision descriptors such as a risk resilient population, safe built-environment, proactive local governance, ecologically balanced natural environment can be used or these can be a list of success indicators to further describe/support the vision descriptors (i.e reduction of exposed population to climate related extreme and slow onset hazards, rate of conformance to risk mitigation structural development regulations, increased level of awareness and proficiency of the population in describing natural hazards affecting their locality, presence of hazard specific mitigation related development regulations, reduction in damages due to hazards to built-up property and production areas). The various indicators of exposure, sensitivity/vulnerability, and adaptive capacity can be translated into success indicators to support certain relevant descriptors. Presented below are sample descriptors and success indicators integrating results of the climate and disaster risk profiling.

Table 4.1 Sample vision element descriptors and success indicators for disaster risk reduction and climate change adaptation

Element	Descriptor	Success Indicators	Rating
People as Individuals and as a	Safe	Reduction of cases of deaths and injuries related to hazards (i.e. direct/indirect)	2
society	Empowered	Increased provision of special opportunities in employment and training for increased adaptive capacity of the population	2
	Vigilant	Increased level of awareness on areas affected and potential impacts of hazards and climate change, incorporating DRR-CCA in the local educational system	2
	Resilient	Reduced dependence on post disaster financing/assistance	2
		Increased % of population employing household level adaptation/mitigation measures	1
Local Economy	Sustainable	Reduction in damages (direct and indirect) in annual local economic output/ productivity due to climate change related hazards	2
		Increase number of economic/production based structures/areas employing adaptation and mitigation measures	1
Environment Management (Built and	Clean and Safe	Conformance rate of built related property employing risk mitigation structural/non-structural regulations	1
Natural Environment)		Increase area coverage of on/off-site mitigation and adaptation measures targeting vulnerable and risk areas associated with climate change and natural hazards	1
		Increased % of critical point facilities and lifeline infrastructures with climate proofing	1
		Reduction in property damage due to natural hazards and climate change impacts	2
	Balanced	Increased green spaces as carbon sinks	2
		Rehabilitation/protection of key biodiversity and ecologically critical/sensitive areas	2
	Sustainable, ecologically sound	Maximizing and managing supply of potable water resources	1
		Increased use of renewable sources of energy and reduced consumption of energy	1
		Efficient and uninterrupted area access/linkage systems	1
		Uninterrupted provision of basic lifeline utilities (i.e. power, water and communication)	1

Table 4.1 Sample vision element descriptors and success indicators for disaster risk reduction and climate change adaptation

Element	Descriptor	Success Indicators	Rating
		Uninterrupted delivery of basic social services (minimize cases due to damaged facilities as a result of natural hazards and climate change)	2
Local Leadership	Firm	High rate of apprehended violators, filed cases/ imposed penalties, sanctioned violators	3
	Progressive	Presence of local legislation in support of risk reduction and climate change adaptation (i.e. incentives and disincentives)	2
		Reduced annual expenditure for disaster response and rehabilitation	2
		Increased financial capacity for disaster and climate change preparedness, adaptation and mitigation	1

Situational Analysis

The climate and disaster risk assessment (CDRA) provides the climate and disaster risk perspectives for a deeper analysis of the planning environment. The emphasis will be on the analysis on the implications of climate change and hazards, to the various development sectors/sub-sectors (i.e. demography/social, economic, infrastructure and utilities) and the land use framework. It shall allow climate and disaster risk concerns to be incorporated in the identification of issues, concerns and problems and ensure that identified policy interventions both address current sectoral needs and anticipate future impacts of climate change and disasters. The integration of climate and disaster risks in the sectoral studies shall provide the opportunity for a more integrated approach in formulating the land use plan.

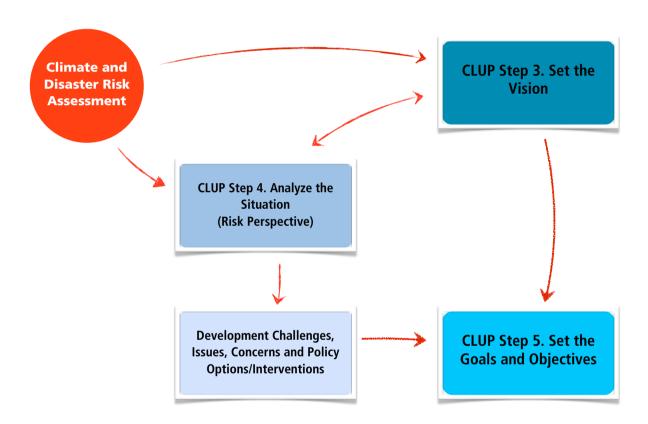


Figure 4.1. Mainstreaming Climate and Disaster Risks in the CLUP (Steps 3-5)

Listed below are the expected outputs of the climate and disaster risk profile. Information derived can be used to further enrich the analysis of the planning environment. The profile is intended to analyze on how climate change and natural hazards will potentially impact the various sectoral development focus areas and inform the identification of development challenges, planning implications, and possible policy interventions in addressing climate change and natural hazards through proper incremental and long-term adaptation and mitigation in order to reduce or eliminate the impacts of future disasters.

Table 4.2 Steps and expected outputs of the Climate and Disaster Risk Assessment

Steps ¹	Key information
Step. 1 Collect and organize climate and hazard information	 Analysis and discussion of projected climate change variables of the locality; Description of the various natural hazards that would likely affect the locality (i.e. spatial extent, magnitude, recurrence interval); Describing the historical damage statistics of past disaster events (amount of damages, affected population and property); Descriptive observations of impacts from past disaster events
Step 2. Scoping potential impacts of climate change and natural hazards	 Illustration and description of potential sectoral impacts of climate change Supplemental analysis of potential impacts based on historical experiences.
Step 3. Exposure Database	 Enhanced baseline exposure maps and attribute information on Population, Urban Use Areas, Natural Resource based Production Areas, Critical Point facilities and lifeline utilities; Indicators of exposure, sensitivity/vulnerability, and adaptive capacity
Step 4.Climate Change Vulnerability Assessment	 Quantitative analysis on the extent of exposure of population, built and production related properties, critical point and lifeline facilities; Understanding of indicators contributing to sensitivity; Qualitative analysis of the degree of impact based on exposure and sensitivity; Qualitative analysis of adaptive capacity, understanding factors contributing to adaptive capacity; Qualitative assessment on the level of vulnerability, based on the potential degree of impact and existing level of adaptive capacities; Vulnerability maps indicting the spatial variation on the level of vulnerabilities of exposed elements; Decision areas, implications and policy interventions in the form of climate change adaptation and mitigation measures.
Step 5. Disaster Risk Assessment	 Analysis of recurrence interval (likelihood of occurrence) of hazards; Quantitative analysis on the extent of exposure population, built and production related properties, critical point and lifeline facilities; Qualitative analysis of vulnerability (social and inherent) of exposed elements, understanding of indicators contributing to vulnerability; Qualitative analysis of the degree of damage based on exposure and vulnerability; Qualitative analysis of adaptive capacity, understanding factors contributing to adaptive capacity; Qualitative analysis on the severity of consequence, based on the potential degree of impact and existing level of adaptive capacities; Risk maps indicting the spatial variation on the level of risks of exposed elements.
Step 6. Summarize findings	 Major decision areas based on the vulnerability and risk maps/ summary tables Summary of area based technical findings based on the assessment of risks and vulnerabilities; Prioritization based on the acceptable level of risks and vulnerability Identification of implications (emphasis on the implication of risks and vulnerabilities to local sectoral development); Identification of policy interventions (legislation, land management policies, programs/projects)

¹ Steps from Chapter 4 of the Supplemental Guidelines

Incorporation of risk and vulnerability information can be used to enrich sectoral and sub-sectoral studies in agriculture, environment, economics, social, and infrastructure and utilities. In general, risks and vulnerabilities can be used to make adjustments in the land demand projections, policy interventions for mitigating risks in

identified high risk/vulnerable areas, demand for lifeline utilities, and other cross cutting strategies for CCA-DRR:

Adjustments to land demand projections - Pertains to land demand implications of risks and vulnerabilities associated with the relocation of existing land uses/facilities. It answers the question, "If we are to relocate these land uses in another area, what would be the additional area requirements apart from the estimated requirements based on population projections). Also, this may also pertain to additional facilities to address vulnerabilities and risks by providing Area estimates are added in the projected land demand covering (but not limited to) the following items:

- Housing;
- Education related facilities (i.e. primary, secondary and tertiary level schools);
- Health related facilities (Hospitals, Municipal Health Stations/Centers)
- Social welfare related facilities (day care centers, senior citizen centers, PWDs and women)
- Government related facilities (i.e. Barangay Halls, Municipal Level Offices;
- Commercial, Industrial, and other production related land uses;

Adjusted demand for lifeline utilities by type - pertains to risk mitigation measures in addressing current risks/vulnerabilities and measures for anticipating potential problems related to the transportation access and utility distribution. These may include:

- Specific routes on where to allocate the estimated ideal road requirement such as evacuation routes, alternative/back-up routes;
- Key road segments/routes for climate proofing or rehabilitation;
- Demand for key water related facilities/distribution networks (distribution line, water pumps, water districts, water storage, etc.)
- Demand for power and communication distribution networks and support facilities

Assessing land supply - This pertains to the incorporation of hazard information in the criteria for analyzing the level of suitability of buildable areas for urban expansion. It involves a preparation of a decision matrix which considers the characteristics of the hazard (i.e. susceptibility level, magnitude, return periods) and the required cost and feasibility to sustainably manage risks associated with hazards for urban use areas.

Policy interventions for risk reduction and management options - This pertains to policies for risk reduction and management option (i.e mitigation that are structural or non-structural in nature which may or may not have area implications (land demand). These interventions may range from the imposition of building structural design standards and mandatory retrofitting (for identified high risk/vulnerable areas which will be retained), determining relevant projects for disaster prevention/preparedness (priority areas to be targeted by disaster evacuation/preparedness measures that are not structural measures); construction of risk mitigation related infrastructure (i.e. flood control works, sea walls, slope stabilization); establishment of agriculture production support facilities (i.e. water impoundment, irrigation network); programs and projects to reduce population sensitivity/vulnerability and enhance adaptive capacities (i.e. livelihood programs targeting identified highly at risk and vulnerable groups); rehabilitation and protection of ecological areas, both for enhancing natural adaptive capacities of environments (ensuring ecological stability to reduce impacts of climate stresses to natural environments) and contribute to mitigation of hazards (reforestation in upland areas to mitigate low land floods, establishment of rehabilitating mangrove areas to mitigate storm surges and coastal erosion).

Social Sector

Housing

In the estimation of housing needs, CDRA can identify priority/decision areas for further detailing and validation. This will allow a detailed counting of households/families within hazard prone areas that are considered high risk/vulnerable, where the preferred mitigation option is through relocation (applying risk reduction though risk elimination and avoidance). Estimated value for relocation shall be added in the number of displaced families item as housing backlogs. Number of housing units considered at risk or vulnerable to hazards where the preferred measure is to retain the residential area/s and mitigate by employing hazard resistant structural retrofitting will be added under estimates for upgrading.

Table 4.3 Adjustments in housing requirements for 2022

	Present/		Future	Future Housing			
Housing Needs	Future Needs	2014	2016	2018	2020	2022	Total
A. Housing Backlog	5,241	1050	1050	1050	1050	1041	5241
Double Occupancy	439	88	88	88	88	87	439
Displaced							
In Danger Areas	2,761	553	553	553	553	549	2761
Affected units due to land earmarked for gov't Infrastructure	1 222	267	267	267	267	264	1332
Evicted/for demolition	1,332 371	75	75	75	75	72	372
Homeless	338	68	68	68	68	66	338
B. Household Formation due to increase	6,420	1250	1250	1250	1250	1420	6420
C. Upgrading	405	100	150	155			405
TOTAL	12,066	2,400	2,450	2,455	2,300	2,461	12,066
Additional housing needs from CDRA ¹							
New Construction ²	2,761	553	553	553	553	549	2761
Retrofitting/Upgrading ³	405	100	150	155			405

¹Subject to validation for possible inclusion in Items A. and C.

²Subject to validation for possible inclusion in item A estimates for displaced housing units in danger areas

³Subject to validation for possible inclusion in Item C estimates subject to upgrading with emphasis on structural risk mitigation of housing units

Education

Adjustments in the projected land area requirements for schools will depend on the number of educational facilities which will be relocated from its current location. Specific school structures, where relocation will be the option for risk reduction, shall be added to the projected area requirements (column G). Educational structures that will be retained in their current locations shall be retrofitted based on hazards affecting the site/structure. Results of the CDRA can be summarized and presented in the sample matrix provided, indicating which structures will be relocated and the estimated area needed.

Table 4.4. Area requirements for educational facilities for 2020

Α	В	С	D	E	F	G	Н	I
School	Projected Classroom Requireme nts ¹	Existing Classrooms	Gap	Classrooms For Relocation CDRA ²	Available classrooms after CDRA	Adjusted Projected Classrooms Requirements	Barangay Classification	Area Requireme nts (Hectares) ³
					= C- E	= B - F		
Awang Elem. School	15	7	8	7	0	15	Rural	0.75
Bagocboc Elem. School	17	5	12	0	5	12	Rural	0.75
Barra Elem. School	42	15	27	15	0	42	Urban	2.12
Cauyonan Elem. School	10	3	7	0	3	7	Rural	0.50
Igpit Elem. School	71	8	63	0	8	63	Urban	3.75
Limunda Elem. School	10	4	6	0	4	6	Rural	0.50
Luyong Bonbon Elem. School	53	9	44	9	0	53	Urban	4.42
Malanang Elem. School	11	6	5	0	6	5	Rural	0.50
Binubongan Elem. School	7	4	3	4	0	7	Rural	1.50
Nangcaon Elem. School	11	4	7	4	0	11	Rural	0.75
Patag Elem. School	21	7	14	0	7	14	Rural	4.00
Opol Central School	99	19	80	0	19	80	Urban	10.67
Megdaha Elem. School	5	2	3	2	0	5	Rural	0.50
Tingalan Elem. School	12	3	9	0	3	9	Rural	0.50
Salawaga Elem. School	11	3	8	3	0	11	Rural	0.75
							TOTAL	31.96

¹Based Sectoral Studies

³For Urban Areas: One-half hectare (1/2 ha.) for a central school which has six classes, for a non-central school which has from three to four classes. One and one half hectare (1 1/2 ha.) for schools which have from seven to ten classes.

Two hectares (2 has.) for schools which have more than 10 classes.

For Rural Areas: One-half hectare (1/2 ha.) for central school with 6 classes and non-central schools with 7-10 classes. Three fourth of a hectare (3/4 ha.) for eleven to twenty classes.

One hectare (1 ha.) for twenty one or more classes. (Source: ANNEX SE-10, eCLUP Guidebook, page 176)

²Based on the CDRA

Social Welfare

Estimation of projected day care centers can be done to determine current backlogs due to hazards. In this example, day care facilities for relocation are indicated in column F (expressed in square meters). Adjustments on the available day care centers after the CDRA can be computed in column G. Net projected area requirements for the planning period can be computed in column H which incorporates the the identified backlog. This approach can also be applied to other social welfare related facilities such as senior citizen buildings, and other structures catering to the needs of PWDs and OSY.

Table 4.5 Area requirements for Day Care Centers, 2022

Α	В	C	D	E	F	G	Н
Barangay & No. DCC	Projected Households by 2022	Projected Day Care Centers ¹	Projected Area Requirements (sq. meters)	Existing land area for day care facilities (sq. meters)	Day care facilities for relocation ²	Available Day Care Facilities after CDRA	Projected Area Requirement s
						= E-F	= D - G
Awang-	565	2	300	100	0	100	200
Bagocboc	640	2	300	250	0	250	50
Barra	4,848	10	1500	300	0	300	1200
Bonbon	1,051	3	450	150	150	0	450
Cauyonan	317	1	150	50	0	50	100
Igpit	3,398	7	1050	100	50	50	1000
Limonda	225	1	150	50	0	50	100
Luyong Bonbon	1,281	3	450	50	50	100	350
Malanang	1,773	4	600	300	75	375	225
Nangcaon	256	1	150	50	0	50	100
Patag	1,111	3	450	350	0	350	100
Poblacion	1,234	3	450	100	0	100	350
Taboc	1,020	3	450	100	100	200	250
Tingalan	581	2	300	150	75	225	75
Total		45	6750	2100	100	2200	4550

¹Based Sectoral Studies

²Based on the CDRA, day care centers identified for relocation

³One Day Care Center per 500 families, One Day Care Center 150 sq. meters, Opol Municipal Social Welfare Department

Health

This covers critical point facilities such as public and private Hospitals, Barangay Health Stations, clinics, and other health services related facilities. The risk/vulnerability evaluation should be able to identify structures to be retained and relocated. Structures to be relocated shall be considered as current backlogs and will be added in the projected area requirements.

Table 4.6 Adjustments in area requirements for Health related facilities

А	В	C	D	E	F	G	Н
BHS/MHS	Projected Population	Projected BHS Requirements ¹	Current Facilities	Health related facilities for relocation ¹	Available health related facilities after CDRA	Adjusted Projected Requirement S	Area Requirement s (Sq. Meters) ²
					= D-E	= C-F	
Barra	21,816	5	1	0	1	4	0.060
Bonbon	4730	1	1	1	0	1	0.015
Igpit	15,291	3	1	1	0	3	0.045
Luyongbonbon	5765	1	1	1	0	1	0.015
Poblacion	5553	1	1	0	1	0	0.000
Taboc	4590	1	1	0	1	0	0.000
Patag	5000	1	1	0	1	0	0.000
Malanang	7,979	2	1	0	1	1	0.015
Awang	2543	1	1	0	1	0	0.000
Bagocboc	2880	1	1	0	1	0	0.000
Cauyonan	1427	1	1	0	1	0	0.000
Limonda	1013	1	1	0	1	0	0.000
Nangcaon	1152	1	1	0	1	0	0.000
Tingalan	2615	1	1	0	1	0	0.000
10 1 (0004 1) (17 1 1)	82354	15	8	3	5	10	0.150

¹Based on the CDRA, identified existing facilities for relocation

²Based on 1:5,000 population per BHS. MHS shall cover the whole municipality. BHS space requirement is 150 sq.meter per facility. (Planning Standard)

Other facilities

The same approach can be done for other social support facilities such as protective services (i.e. police, fire protection, jail, , governance (Brgy. Halls, Municipal Hall), sports and recreation (gymnasiums. indoor sports facilities, etc.) The risk/vulnerability evaluation shall identify what structures will be relocated and retained. All identified structures for relocation shall be added in the end of planning period projected area requirements.

Economic Sector

This shall cover lands currently allocated for production such as commercial, industrial, tourism, agriculture and fisheries. However, separate analysis should be done for built up production areas such as commercial, industrial and tourism related facilities and areas devoted to natural resource production (i.e. crop, forestry, livestock, inland fisheries production).

Urban Use Areas

CDRA provides the information on non-residential urban use areas which will be relocated due to risks and vulnerability. This can be used to fine tune the projected estimated land area requirements with emphasis on the adjusted land area requirements on cases where some of the urban use areas will be relocated. When relocating urban areas, these will be added in the projected end of planning period land demand. Areas to be retained will be subject to risk mitigation measures either through the structural regulations, mandatory retrofitting or higher property taxes to fund hazard mitigation infrastructure. A sample urban use area projection is presented below:

Table 4.7 Adjustifients in area requirements for orban ose	Areas

Α	В	С	D	E	F
Land Use Category	Existing Areas	Projected Land Requirements	For Relocation ⁴	Available urban use area	Adjusted Land Requirements
				= B - D	= C - E
Commercial ¹	13.13	15.65	8.831	4.299	11.351
Light Industries ²	63.17	66	0.538	62.632	3.368
Tourism ³	3.2	12	1.372	1.828	10.172

¹ 1.5-3% of Total Urban Use Areas

Natural Resource Production Areas

When dealing with natural resource production areas (i.e crop production areas, fisheries, production forests), the CDRA provides the information on the major decision areas in need of mitigation (adaptation). Mitigation measures can be structural (establishment of flood control works, slope stabilization, construction of water impoundment and irrigation facilities, establishment of extension services field offices, retrofitting production support infrastructure, establishment of warehouses for farm implements and harvests) and non-structural (i.e. use of hazard resistant varieties, climate sensitive production techniques, improving farmers access to extension services, crop insurance). Specific measures for mitigation targeting identified production areas can be guided by the various indicators of sensitivity/vulnerability and adaptive capacity. These can be reflected in the issues matrix and policy interventions can be those that would reduce sensitivities/vulnerabilities or enhance adaptive capacities. These can be further translated into programs, projects and in certain cases regulation (i.e. requiring farmers to secure crop insurances, higher property taxes to fund adaptation/ mitigation options).

² 0.8 Hectares per 1,000 Population

³ Private Sector Commitments

⁴ Estimated urban use areas for relocation based on the CDRA

Table 4.8 Sample summary of Risk Management Options for Natural Resource Production Areas

Risk Management Options	 Establishment of irrigation facilities and water impoundment facilities to sustain 884 hectares of rice production areas. Use of drought resistant varieties and/or those with reduced water requirements; Improve extension services with emphasis on climate and hazard resilient production techniques; 	 Establishment of irrigation facilities and water impoundment facilities to sustain 3,273 hectares of rice production areas; Establishment of early warning system for agricultural crop production; Encourage the use of risk transfer instruments (i.e. crop insurance); Use of drought resistant varieties and/or those with reduced water requirements; Provision of forestry based alternative livelihood opportunities; 	 Changing crop and/or use of flood resistant varieties can be pursued. Use of drought and flood resistant varieties and/or those with reduced water requirements; Establishment of early warning system for agricultural crop production; Crop insurance can also be encouraged; Provide non-agriculture based livelihood opportunities; Establishment of warehouses for temporary storage; Reduce surface water run-off through upland watershed reforestation; Further expansion of agricultural areas in other upland areas; 	 Establishment of warehouses for temporary storage; Establishment of irrigation facilities and water impoundment facilities to sustain 884 hectares of rice production areas. Use of drought resistant varieties and/or those with reduced water requirements; Improve extension services with emphasis on climate and hazard resilient production techniques; Further expansion of agricultural areas in other upland areas; Reduce surface water run-off through upland watershed reforestation; 	 Establishment of Irrigation and water impoundment facilities; Crop diversification, Provision of alternative forest production based livelihood;
Area Allocation (Hectares)	884	3,273	58.66	282	1,064
Area Description	 Interventions needed to address lack of irrigation and water impoundment facilities. Extension services sorely lacking. Farmers not familiar with crop insurance. 	 Mostly rain fed rice production areas. No available irrigation and water impoundments facilities. Far flung barangay with no immediate access to extension services and access to early warning systems. Among the highest contributor of rice produce in the Municipality. 	 High value vegetable crops being produced. Farmers not familiar with climate sensitive crop scheduling. 	 Flood plain portion of the Barangay. No flood control and water impoundment facilities. Use of drought tolerant varieties can be pursued. Look into possible utilization of ground water sources for irrigation during droughts. 	 Upland barangay with minimal irrigation and water impoundment facilities, Corn areas mostly rain fed. Among the biggest contributor of corn in the area. Very minimal Irrigation and water impoundment facilities present; possible extension services on climate sensitive production can be pursued.
Major Decision Areas	Awang	Вадосьос	Barra	lgpit	Limonda

Infrastructure and Utilities Sector

The CDRA would be able to identify existing transportation, power, water and communication related point facilities or distribution networks that would need either rehabilitation or climate proofing mainly to ensure the uninterrupted delivery of power, communication and water services and ensure efficient linkages between the various key settlement growth areas/functional areas of the locality.

Transportation

A summary risk/vulnerability evaluation can be presented in a way that key road segments are identified that are in need of immediate action. These important road/access segments are key to prevent the isolation of communities and ensure efficient movement of supplies and emergency service during disasters. A sample list of road segments based from the risk/vulnerability evaluation is presented below which also includes the identification of possible mitigation measures like upgrading/rehabilitating existing road facilities and/or establishing redundant/alternate routes.

Bridges can also be assessed and evaluated. This ca be done through element based risk/vulnerability assessment. These are also important access systems which can be damaged by hazards resulting in major to minor interruptions in linking functional areas in the locality. Through he CDRA, priority bridges in need of immediate action can be identified so proper mitigation measures can be identified and implemented.

Table 4.9 Sample Risk Management Options for Priority Bridges

Name	Туре	Location	Risk Management Options ¹
Iponan Bridge	Concrete	Barra	 Establishment of alternate route systems connecting the Municipal Growth Center of Opol to CDO to ensure uninterrupted linkage of the two growth areas; Retrofitting of existing bridge to accommodate 100 year floods;
lgpit Bridge	Concrete	lgpit	 Establishment of alternate route systems connecting Poblacion-Igpit/Barra to ensure uninterrupted linkage within the municipality; Retrofitting of existing bridge to accommodate 100 year floods;
Taboc Bridge 2	Concrete	Taboc	 Establishment of alternate route systems connecting Barangay Taboc - Igpit Retrofitting of existing bridge to accommodate high 100 year floods;
Tulu\ay ng Pangulo	Steel	Tapurok, Malanang	 Establishment of alternate route systems connecting upland barangays with the Poblacion Retrofitting of exisitng bridge to accommodate 100 year floods;

¹Retrofitting works to mitigate embankment scour, lateral spreading and pilie driving of bridge support columns.

Table 4.10 Summary Risk Management Options for Road Network

Major Decision Area (Road Segment)¹	Classification	Linear Kilometers	Remarks	Risk Management Options
Highway-Junction Tulahon road	Provincial road	1.0145	Main road access going to upper Poblacion from Brgy Taboc/Lower Poblacion. Short interruption expected due to severe flood events	Road concreting, and increase road elevation above the flood height. Establish road embankment protection.
Metro Cagayan road	National road	2.1054	Diversion road parallel to the national highway near the coastal areas. Unapassable during extreme flood events leading to isolation of settlements along the coast.	Improve drainage to allow flood waters to flow underneath through box culverts. Establish road embankment protection.
National Highway	National road	1.6647	Main road access/linkage to Cagayan de Oro to the Municipal Center will be unpassable during extreme events. Isolation of the Municipal Center to the western part growth areas of the municipality will is expected.	Improve drainage to allow flood waters to flow underneath through box culverts. Establish road embankment protection. Establishment of altemate route transecting Igpit Malanang Patag
National Highway to Narulang road	Provincial road	1.6203	Only road access leading to Youngsville subdivision from the national road. Possible isolation of Youngville subdivision during moderate to extreme flood events.	Road concreting, and increase road elevation above the flood height. Establish road embankment protection. Improve drainage to allow flood waters to flow underneath through box culverts.
National Highway to Pag-Ibig Citi Homes	Barangay Road	2.5546	Only road access leading to Pag-Ibig Citi Homes subdivision from the national road. Possible isolation of Pag-ibig Citi Homes during extreme flood events.	Road concreting, and increase road elevation above the flood height. Establish road embankment protection. Improve drainage to allow flood waters to flow underneath through box culverts.
National Highway to Zone 1 Road	Barangay Road	2.1897	Main road access parallel to the Iponan River. Possible isolation of communities during moderate to extreme flood events.	Establish riverside embankment protection.Establishment of alternate route parallel to Zone 1 Road.
Tulahon to Tapurok Road	Barangay Road	0.3803	Main route accessing upper Brgy Patag from Brgy Malanang, and Igpit. Unpassable during extreme flood events.	Road concreting, and increase road elevation above the flood height. Establish road embankment protection. Improve drainage to allow flood waters to flow underneath through box culverts.
¹ Major road segments for mitig	ation can be derived	from the identified	¹ Major road segments for mitigation can be derived from the identified decision areas in the CDRA (lifeline Utilities)	

The various risk management options identified can be used as added considerations in refining and designing the transportation network plan of the area with the intention of ensuring the uninterrupted inter and intra area linkages of various functional areas.

Water/Communication and Power

A risk/vulnerability assessment of power,water and communication facilities can also be done to determine impacts of hazards on the uninterrupted provision of water, power and communication facilities. However, assessment can be limited to element based structures such as power substations, water pumping/storage related facilities and communication towers. These can be presented similar to bridge risk/vulnerability evaluation listing down the unique facility indicating the risk/vulnerability evaluation category (high, moderate, low priority). Point facilities considered high are those in need of immediate action. Risk mitigation can be done through retrofitting of the structure where the design specifications are dependent on the hazards affecting the structure, and/or establishment of redundant/back up systems. If time and available data permits, an assessment of the utility networks (where segments rather than point facilities are assessed) can also be done. This is to identify important key utility segments that needs to be mitigated, either through hazard resistant design specifications/climate proofing, or establishment of redundant/looping systems to ensure uninterrupted delivery of utility services.

179

Land Demand and Supply Analysis

Results of the CDRA can be used as valuable inputs in land demand and supply analysis. , accounting for the existing urban use areas which will be retained subject to the implementation of risk management strategies; inform decision makers on priority areas for urban expansion by analyzing the suitability of sites considering susceptibility to hazards and the cost and effort to sustainably develop and maintain urban areas it in the long run; and facilitate the identification of necessary supply augmentation strategies through the implementation of risk management options as may be needed (refer to Figure 4.2).

- 1. CDRA adjusted land demand Potential backlogs are associated with the planned relocation of facilities or urban use areas (i.e. housing units and critical point facilities for relocation), due to risk and vulnerability considerations, which were analyzed during the sectoral/sub-sectoral studies. Areas to be relocated shall be incorporated in the final land demand and this may pertain to residential areas, economic based structures/ establishments, social support infrastructures considered highly at risk and/or vulnerable with emphasis on the possible structural damage or high possibility of deaths due their current location relative to the expected changes in the area extent, magnitude and recurrence of natural hazards due to climate change (i.e. floods and storm surges being more severe and frequent, coastal area inundation due to sea-level rise). Areas for relocation are also associated with areas where interventions (structural and non-structural) are not feasible and/or unsustainable (i.e. flood control works, sea walls, reclamation, potential cost for response, rehabilitation/recovery, financial capacity for implementing major risk mitigation projects) and areas within prescribed and extended buffer easements (i.e.coastal and river easements). Adjustments in the projected land requirement per use are added to estimate the total future land demand by the end of the planning period.
- 2. Existing urban use areas CDRA, through the various risk and vulnerability maps, including the policy interventions to address them, can provide a distinction between areas/uses which will be relocated (where risks are unmanageable) and which areas will be maintained (where risks can be managed). Areas where risks are unmanageable are either added in areas for protection (expanded river easements, high susceptible landslide areas) or allocated for production type land uses and urban use spaces such as open space, parks and buffer. Urban use areas to be maintained are identified risk or vulnerable areas/ establishments where measures for mitigation can be pursued (i.e. retrofitting, implementation of major risk mitigation projects) to reduce risks to acceptable levels and are within the capacities of property owners. Urban use areas to be retained are then subtracted from the total available land supply.
- 3. Areas for protection In the context of climate and disaster risks, when estimating land supply for urban use area expansion, it should account for the expected changes in the area extent, magnitude and recurrence of natural hazards due to climate change. The estimated land supply should consider whether the associated impacts of hazards can be managed over time given current capacities for mitigation/ adaptation. A better understanding of the varying degrees of hazard types and level susceptibility in relation to current and future capacities for short to long-term mitigation, are needed so that decisions can be made on whether certain hazard prone areas will be deducted in the available land supply. Furthermore, the establishment of buffer easements (whether nationally prescribed or extended to account for the projected impacts of climate change to existing hazards) can be deducted in the available land supply. Examples include the extension of coastal easements (from the mandatory 40 meters) to account for the projected inundation of coastal areas due to sea level rise, extension of river easements (urban, agricultural areas) to account for changes in the flood extent and magnitude. These high risk areas can be deducted to the available land supply either allocated for resource production or open/green spaces.

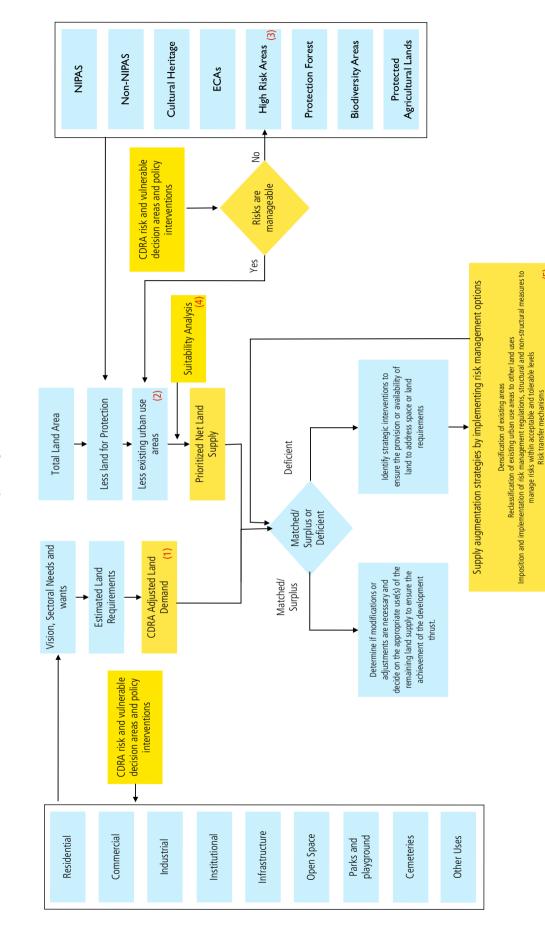


Figure 4.2 Land Demand and Supply Analysis, incorporating results of the Climate and Disaster Risk Assessment

(2)

- 4. Suitability analysis Upon determining the available land supply for expansion, a sieve suitability analysis/ mapping can be conducted to rank and prioritize areas within the areas where expansion can occur. When determining suitability, hazards are viewed as constraints where necessary interventions are needed in order to sustain settlements by managing risks within acceptable levels. Managing risks within acceptable levels entails costs (higher development costs associated with mitigating risks) depending on the characteristics of the hazard. Analyzing suitability allows decision makers to prioritize the location of important urban use areas (i.e. residential areas, socialized housing, critical point facilities) in high suitable areas where costs for mitigation will be lower compared to less suitable areas where the cost for employing risk reduction measures will be higher. Moderate to low suitability areas can be reserved for uses with propensities to generate revenues/income to offset the cost for mitigation.
 - a. Preparation of suitability parameters (hazards) The sieve mapping technique illustrated in the CLUP-HLURB Guidebook (Volume 1) can be enhanced to by assigning suitability indexes for hazard prone area to prioritize areas for urban expansion. A suitability matrix can be prepared to assign the suitability score for each hazard per susceptibility level (or hazard intensities and recurrence when available). Suitability scores can be discussed and assigned depending on the costs for mitigating risks within acceptable/tolerable levels (refer to table 4.11-4.12 Suitability score and sample suitability analysis matrix).

Table 4.11 Suitability score and description

Suitability Category	Description	Suitability Score	Recommended land uses for allocation
Highly Suitable	Areas not susceptible to the hazard	0	All urban use areas. Priority area for residential type land uses, essential facilities, special occupancy structures and hazardous facilities
Moderately suitable	Area within low susceptible hazard areas. Required cost for risk mitigation will be low	1	All urban use areas. Priority area for residential type land uses, essential facilities, special occupancy structures and hazardous facilities but subject to regulations on site and hazard resistant design
Low suitability	Area within moderate susceptible hazard areas. Required cost for risk mitigation will be moderate to high	2	Commercial and industrial uses but subject to regulations on hazard resistant site and building design
Highly Unsuitable	Area within high susceptible hazard areas. Required cost for risk mitigation will be very high, infeasible, and impracticable	3	Parks and open spaces, buffer strips and areas devoted for natural resource production
Non-Build able Areas	Areas under strict protection status from existing national laws and issuances such as fault easements, Permanent Danger Zones	100	Protection Land Uses


Table 4.12 Recommended suitability score and description¹

		Suitability Score ²		
Highly Suitable	Moderately Suitable	Low Suitability	Highly Unsuitable	Non-Buildable
0	1	2	3	100
0				
	1			
		2		
			3	
0				
	1			
		2		
			3	
0				
	1			
		2		
			3	
		2		
			3	
0				
	1			
	1			
	1			
				100
0				
	1			
	1			
	1			
			3	
			•	100
	O O O O O O O O O O O O O O O O O O O	Suitable Suitable 0 1 0 1 0 1 0 1 1 1 1 1 0 1 1 1 1 1 1 1 1 1 1 1 1 1	Highly Suitable 0 1 2 0 1 2 0 1 2 0 1 2 0 1 2 0 1 2 0 1 2 0 1 2 0 0 1 2 0 0 1 2 0 0 1 2 0 0 1 1 2 0 0 1 1 2 0 0 1 1 1 1	Highly Suitable Moderately Suitable Low Suitability Highly Unsuitable 0 1 2 3 0 1 2 3 0 1 2 3 0 1 2 3 0 1 2 3 0 1 2 3 0 1 2 3 0 1 2 3 0 1 1 1 1 1 1 1 0 1 1 1 0 1 1 1 0 1 1 1 0 1 1 1 0 1 1 1 0 1 1 1 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1

¹LGUs can assign suitability ratings depending on the current and future capacities of property owners to cover the costs and effort for implementing risk management options

² Refer to Table 4.11 on the suitability descriptions and scores

Figure 4.2a. Sample Sieve Mapping and Suitability Analysis

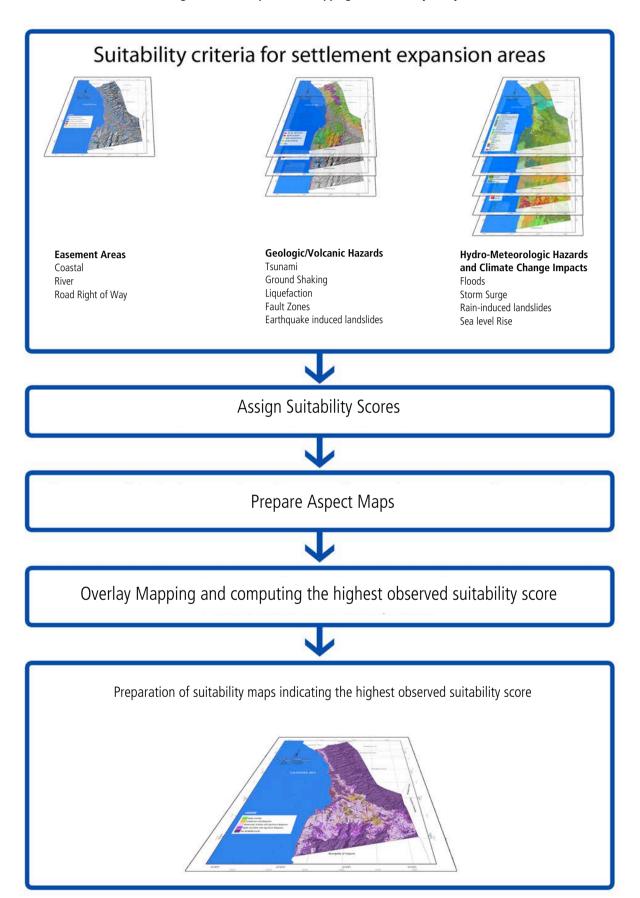

- b. Overlay mapping transparencies can be prepared by translating hazard maps into aspect maps containing the suitability categories. This can also be facilitated by using Geographic Information System and conducting spatial analysis/overlays where suitability ratings can be incorporated in the attribute table per hazard map.
- c. Measuring suitability -Suitability can be derived from the sieve mapping analysis. Suitability index can be represented by the highest observed suitability score (HOSS) based on the combination of aspect suitability maps. This will provide an indication of site suitability. A secondary measure of suitability for further ranking can be derived from the total suitability score (TSS) using the sum of all suitability ratings used to indicate the number of complications (combination of suitability scores) in developing the site. Prioritization can be conducted by sorting values based on the highest observed suitability score (HOSS) and the total suitability score (TSS). The resulting maps can facilitate the identification of priority areas suitable to accommodate the required land demand and determine areas where possible densification and further risk mitigation can be employed during the demand-supply balancing.
- 5. Supply augmentation strategies When balancing land demand and supply, risk mitigation measures can be treated as supply augmentation strategies. Highly susceptible areas, depending on the hazard type, can still be set aside for settlement development provided that the necessary mitigation measures are in place. One example is settlement development within highly susceptible flood areas where structural mitigation measures can be implemented given the capacities of property owners to conform to structural design standards (design considers the base flood elevation and velocity based on modeling and simulation incorporating climate change scenarios) and construction of flood control measures (where costs for implementation are shared by both the LGU and beneficiaries).

Another example is the development within storm surge areas where storm surge heights and magnitude are clearly projected and understood allowing design standards for structural resilience to be identified and enforced. Another option is through vertical development or densification of settlement areas (either within expansion or existing urban areas) where impacts of hazards are manageable.

In cases where the expected magnitude and recurrence of hazards exceeds current capacities to cope and adapt (landslide prone areas where the cost of mitigation like establishment of slope stabilization works requiring significant financial resources), these areas can be momentarily left in their natural state until such time when level of capacities can sustainably overcome these impacts.

HLURB-CCC-UNDP-Ausaid I PROJECT CLIMATE TWIN PHOENIX

SUPPLEMENTAL GUIDELINES ON MAINSTREAMING CLIMATE AND DISASTER RISKS IN THE COMPREHENSIVE LAND USE PLAN

Sectoral and Cross-sectoral Analysis

Mainstreaming climate and disaster risks in the sectoral analysis provides a risk/vulnerability perspective in generating the technical findings, enriches the identification of development challenges, issues and problems with emphasis on the impacts of hazards and climate change; the identification of future implications if these issues are not addressed, and the various mitigation and adaptation options to address which can be reflected and articulated in the policy interventions. Presented below are some considerations when conducting a sectoral/cross-sectoral study issues matrix, incorporating the significant findings from the climate and disaster risk profile and risk/vulnerability enhanced situational analysis. Presented is a sample risk-enhanced issues matrix.

Table 4.13 Risk and Vulnerability Information in the sectoral and cross sectoral analysis

Technical Findings	Implications	Policy Interventions
 Incorporate technical findings from the CDRA when discussing sectoral or cross-sectoral analysis: Risks and vulnerabilities (Priority areas in need of interventions); Underlying factors contributing to risks and vulnerabilities based on the analysis of exposure, sensitivity/vulnerability and adaptive capacity; Impacts of hazards and climate change to the projected land requirements (backlogs) Important parameters such as Climate Change Projections (extreme weather events, projected seasonal changes in temperature and rainfall), possible impacts of climate change to existing hazards (frequency and severity) such as floods, landslides, storm surges, drought, etc. 	Identify the possible implications and provide statements related to the potential impacts to sectoral development if the development challenges (Problems, issues and concerns) are not addressed. This can be further supplemented by anecdotal accounts derived from the impact chain analysis.	Identify possible policy options and interventions that can address the development challenges/issues and problems with emphasis on interventions related to risk mitigation; and climate change adaptation. These can be in the form of: Specific policies (local legislation, spatial development policies) Specific strategies (Programs, Projects and Activities)

Table 4.14 Risk and Vulnerability considerations in the sectoral and cross sectoral analysis, Social sector Housing Sub-sector

		sas sectoral alialysis, social sector flousing sub-sector
Technical Findings	Implications	Policy Interventions
Increasing number of households in highly susceptible areas to flooding, sea level rise and storm surge. Provision of adequate and suitable housing units/areas within the Municipality Presence of informal settlers within the highly susceptible areas to flooding, sea level rise and storm surge. Approximately 2,700 households live in highly vulnerable structures (floods, sea level rise, and storm surge) and needs to be relocated, Approximately 450 structures in flood and storm surge areas which will be retained needs to be upgraded/retrofitted. Space requirements for approximately 6500 housing units needs to be identified and established by 2022 Behavioral characteristics of vulnerable group (preferring to live within highly susceptible to hazards to be near their place of work) making off-site relocation problematic ineffective, Beneficiaries unwilling to stay in existing relocation sites due to lack of income opportunities and lack of on-site basic utilities, Lack of financial capacities of beneficiaries to participate in relocation, and LGU to provide affordable resettlement housing. Lack of LGU capabilities for enforcement and monitoring growth of informal settlements. Lack of financial capacity among the residential building owners in conforming to structural regulations to mitigate floods. Lack of clear locational and structural development guidelines in the establishment and construction of residential structures.	Possible future deaths are expected in identified hazard and climate change hotspots. Uncontrolled future growth of settlements in identified hotspots increases risk to fatalities and property damage Redirection of LGU funds for disaster response, relief and rehabilitation. Increased poverty incidence especially among highly vulnerable groups	Identification of future expansion areas within relatively safe areas Identify suitable relocation sites for settlers in highly susceptible areas to flooding, sea level rise and storm surge 445 households needs relocation 405 housing units needs retrofitting Land banking for in-municipality relocation. Consider mutli-storey housing units within relocation sites (as an alternative to row one floor housings). Provide budget for relocation site development Social preparation of informal settlers (increase awareness on the potential impacts of hazards and climate change to justify actions for mitigation/adaptation) Access funds National Housing Authority (NHA) Creation /activation of the local housing board Establish a system to periodically monitor encroachment on public properties Generate economic opportunities (Alternative livelihood) to increase the level of adaptive capacities of the population Imposition of additional development restrictions/ regulations in the location and development of housing units (including other structures). Discourage the construction of utilities in identified informal settler areas (transportation, water and electricity) to discourage future growth. Reforestation in the Watershed areas of the Iponan and Buncalalan River

Table 4.15 Risk and Vulnerability considerations in the sectoral and cross sectoral analysis, Social Sector-Health Sub-sector

Technical Findings	Implications	Policy Interventions
Increasing demand and ensuring adequate and efficient delivery of quality basic health services There is a need to provide 10 additional BHS based on the projected population by 2022. which includes three BHS in need of relocation. Around 5 existing BHS require retrofitting to mitigate the hazards affecting the structure. Significant reduction in forest cover in the Iponan and Buncalalan watershed areas have been observed and may have contributed to low land flooding	Inadequacies in the provision of BHS level health services in the future to accommodate projected future population. No assurances that these facilities will be operational during extreme rainfall events which may lead to the deficiencies in the delivery of health related services,	Construction of new BHS within relatively natural hazard safe areas. Employing structural mitigation/climate proofing of new BHS structures. Rehabilitation and retrofitting/climate proofing of 5 existing BHS structures vulnerable to damage against flood. Reforestation in the Watershed areas of the Iponan and Buncalalan River
Existing Municipal health station (12 bed capacity) is within a flood prone area. Past flood occurrences resulted in the transfer of patients in the local public market (Jan 11, 2009, Tail end of the cold front at 200mm). Cagayan de Oro projections of extreme daily rainfall events (>150mm) suggests that there will 13 events occurring within the period of 2006-2035 (2020 projection) and nine events occurring within the period of 2036-2065 (2050 projection).	Possible inadequacies and major disruption of provision of health services. Disaster response may be ineffective and may lead to deaths due to lack of medical/health services	Retrofitting is possible by extending vertically and using the first floor as parking area. It will entail significant costs but cheaper compared to establishing a new municipal health station. Establishment of new hospital to accommodate projected future population will be outside flood prone and sea level rise impact areas Reforestation in the Watershed areas of the Iponan and Buncalalan River

Set the Goals and Objectives

A goal is a broad statement of the desired outcome in support of the long term vision. Goals are typically inter-sectoral in scope and long to medium term in time scale and seeks to address or respond to a general problem. Objectives are more specific statements of medium to short-term targets which seeks to address specific sectoral problems that would contribute in the achievement of the identified goal. Informed of the various development challenges, problems, issues and concerns, and the various policy interventions (through the climate and disaster risk profile incorporated in the sectoral and cross sectoral studies), the municipality/city should be able to enrich its sectoral goals and objectives statements by incorporating principles of disaster risk reduction and climate change adaptation. The integration of climate and disaster risks in the CLUP, recognizes risk reduction and climate change adaptation as pre-requisites to sustainable development and ensures that these will be among the priority long-term agenda of the local government and guide the spatial development locality.

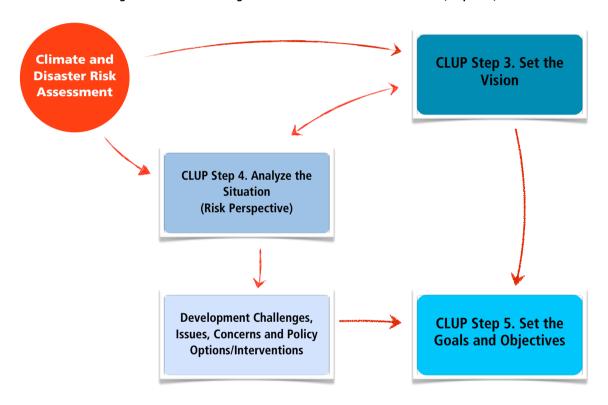


Figure 4.3 Mainstreaming Climate and Disaster Risks in the CLUP (Steps 3-5)

It is assumed that the identified development challenges, issues and concerns derived from the situational analysis, are already cognizant of CCA-DRRM. The sectoral studies are already a product of the incorporation of the significant findings from the climate and disaster risk profiling to the various planning sectors. Also, the vision statement already benefits from the incorporation of CCA-DRRM and provides a good description of the ideal state of the locality in the future. Development challenges/issues, including vision descriptors, can be restated as goal statements while policy interventions identified in the sectoral studies can either be restated as objectives. In the context of CCA-DRRM as it relates to spatial planning, goals and objectives should be able to cover the following development concerns:

- Rational settlement development/growth that addresses current risks and preventing future risks from occurring, ensure human security through rational land development practices
- Enhance the quality and stability of natural environments as a means to reduce risks, contribute to climate change adaptation and mitigation
- Encourage the efficient and sustainable management of natural resources

- Ensure optimum economic productivity through resilient and well adapted production systems
- Address vulnerabilities/sensitivities and enhance adaptive capacities of the population
- Ensuring the uninterrupted access to social support services
- Efficient linkage/access, and distribution systems through the establishment of climate proofed and resilient infrastructure and utilities
- More efficient use of public and private investments

Presented below are sample outputs of goals and objectives setting with emphasis on the outputs derived from the CDRA.

Table 4.16 Sample goals and objectives

Vision Statement	Goals	Objectives
		Establishment of 22 new BHS that are disaster and climate risk resilient by 2023
	Ensure the adequate and efficient	Retrofitting and rehabilitation of 6 existing BHS and existing Municipal hospital against potential hazards affecting the structure
	delivery of basic social support facilities/services	Establishment of additional 139 classrooms that are disaster and climate risk resilient in safe locations and reduce cases of disruption of classes due to structural and equipment damage
A vibrant and sustainable commercial, industrial and tourism based economy propelled by pro – active		Retrofitting and rehabilitation of 10 existing classrooms to mitigate potential hazards affecting the structure.
and self reliant citizenry living in a water sufficient, adaptive and balanced environment with		Increase allocation for urban use areas, Generate jobs in the agri-industrial, tourism industries to cover 1,200 households by 2022;
competitive and pro–poor governance.	Ensure human security by increasing	Increase level of awareness of local population on emerging issues related to disasters and climate change including measures for adaptation and mitigation
	the level of adaptive capacities of the population and establishment of sustainable and well adapted housing units	Encourage the retrofitting/upgrading of 405 existing housing structures
		Relocate 445 informal settler households considered highly vulnerable and at risk to flooding, sea level rise and storm surges
		Establish new housing units to accommodate future households (6,420)

Vision Statement	Goals	Objectives
A vibrant and sustainable commercial, industrial and tourism based economy propelled by pro — active and self reliant citizenry living in a water sufficient, adaptive and balanced environment with competitive and pro—poor governance.	Ensure local food security and optimum productivity of agriculture and forest based industries	Increase areas allocated for agricultural production Reduce cases of land conversion of prime agricultural lands to non-agricultural uses Established climate proofed/risk resilient food warehouses Increase in the average per hectare yield for rice and corn Established climate proofed/risk resilient post harvest facilities Reduce damages to farm equipment and post harvest facilities Increase in agricultural crop production areas with access to water impoundment facilities Identification of alternative water sources (surface and ground) for irrigation
		Increase in agricultural crop production areas with access to irrigation facilities Decrease amount of damage to crops due to flood, severe winds, drought through sound and climate proofed production techniques
		Establish forest production areas and ensure sustainable production/resource extraction techniques

Vision Statement	Goals	Objectives
A vibrant and sustainable commercial, industrial and	Establish climate smart, risk resilient and environment friendly industries and services	Increase area allocation for economic based establishments tourism, agri-industrial, forestry and other service related facilities/establishments Increase in locally employed residents Increase number establishments employing structural mitigation measures and/or Decrease in number of exposed business establishments to hazards Decrease production losses due to hazards Number of establishments employing water augmentation practices Number of establishments using on-site renewable energy technologies Local ordinance providing incentives to establishments using eco-efficient production/operation practices
tourism based economy propelled by pro – active and self reliant citizenry living in a water sufficient, adaptive and balanced environment with competitive and pro–poor governance.	Enhance the quality and stability of natural environments	Local ordinance designating portions of the Buncalalan River Watershed as protection forest Local Ordinance designating portions of the Iponan River Watershed as protection forest Rehabilitation of forest areas Increase in mangrove areas rehabilitated in hectares Local ordinance designating portions of the coastal areas as protection mangrove forest Local ordinance designating portions of the coastal areas within inland fishery areas as production areas including sustainable resource management regulations in place Resolution of conflicts arising from the conversion of mangrove forests into urban use areas Local ordinance designating key aquatic habitats as protection areas Reduction of cases of prohibited resource extraction activities within identified protected areas

Vision Statement	Goals	Objectives
A vibrant and sustainable commercial, industrial and tourism based economy propelled by pro – active and self reliant citizenry living in a water sufficient, adaptive and balanced environment with competitive and pro–poor governance.	Establish climate smart and disaster risk resilient infrastructure systems	Established alternate route connecting the urban core to the Cagayan de Oro and El Salvador Reduced cases of prolonged isolation of barangays due to floods, landslides, storm surges Number of highly vulnerable and at risk road segments climate proofed and/or rehabilitated Establishment of local water district Increase volume of water in cubic meters locally sourced Ensure water quality of potable water (point source) Area coverage (or households and establishments) with access to potable drinking water Number of establishments employing water augmentation practices Reduced cases of disruption of water distribution services due to natural hazards. Reduced cases of disruption of water distribution services due to lack of water supply Establishment of communal water treatment facilities within major settlement areas Local ordinance providing incentives to establishments using eco-efficient water management practices Number of off-grid, decentralized community based renewable energy systems to generate affordable electricity
		Amount of energy (KwH) derived from renewable energy sources Reduced cases of disruption of power distribution services due to natural hazards. Reduced electricity consumption
		neduced electricity consumption

Table 4.17 Sample Development Thrust evaluation

			Altern	Alternative 1:	Alternative 2:	ative 2:	Alterna	Alternative 3:
	Criteria	Weight	Intensi	Intensified Crop Production Development	Agro-Fore: Develo	Agro-Forestry Tourism Development	Light to Me Industrial D	Light to Medium Agri- Industrial Development
			Rating	Weighted Rating	Rating	Weighted Rating	Rating	Weighted Rating
—	Cost of new support infrastructure (i.e. Transportation, Power, Communication, Irrigation)	10%	m	0.3	4	0.4	4	0.4
2	Is the option consistent with the vision and achievement of identified goals and objectives	%5	4	0.2	4	0.2	m	0.15
m	Will the option generate enough economic opportunities and improve income levels of the local inhabitants (sensitivities and enhance adaptive capacities of households and individuals)	15%	7	0.3	4	9.0	т	0.45
4	Will it generate enough local revenues/income in the form of real property taxes and business permits to support/sustain local development	2%	2	0.1	m	0.15	4	0.2
2	Does the local inhabitants have the necessary skills and capabilities to pursue the option	2%	4	0.2	4	0.2	4	0.2
9	Does the Local Government have the capacity and capability to support the development thrust in terms of policy, program and project implementation	2%	4	0.2	4	0.2	4	0.2
7	Will it encourage the sustainable and optimal use of local natural resources	2%	m	0.15	4	0.2	Ж	0.15
∞	Is the option achievable given the hazard susceptibilities of the Municipality	15%	m	0.45	m	0.45	m	0.45
6	Is the option achievable given the projected changes in the climate (extremes and variability)	15%	m	0.45	4	9.0	4	9.0
10	Disaster risk management and climate change adaptation measures needed to pursue the option on the part of the LGU and the private sector	10%	2	0.2	2	0.2	m	0.3
=======================================	Does it promote ecological balance and sustainability	10%	4	0.4	4	0.4	κ	0.3
	Weighted Score	100%	2	2.95	m .	3.6	w , ,	3.4

coring System:

capacities and/or capacities of desired goals, moderate cost requirements to achieve goals, existing capacities and/or capabilities of constituents or the government to achieve goals are present 4-Very high contribution to the achievement of desired goals, Low cost requirements to achieve goals, existing capacities and/or capabilities of constituents or the government to achieve goals are highly -Low contribution to the achievement of desired goals, very high cost requirements to achieve goals, very limited capacities and/or capabilities of constituents or the government to achieve goals 2-Moderate contribution to the achievement of desired goals, high cost requirements to achieve goals, limited capacities and/or capabilities of constituents or the government to achieve goals

Note: The above evaluation tool is for demonstration purposes only. LGUs can develop or adopt its own evaluation tool. compatible

The development thrust identifies the type of development the city/municipality wishes to pursue, which will drive the long term development of the locality. Identification of development options is based on sectoral studies, SWOT analysis, and other analytical studies which establishes the inherent potentials and opportunities. LGUs are expected to identify at least three development thrust options (i.e. Agriculture, Industrial, Commercial, Eco-Tourism, Agri-Tourism) and prepare an evaluation criteria to select the preferred thrust. The thrust option/s should be consistent with the predefined vision, goals and objectives.

In the context of integrating CCA-DRR in the CLUP, climate and disaster risk information allows decision makers and stakeholders an opportunity to revisit its current development thrust. It can choose to identify possible alternative development thrusts, evaluate and select the preferred development thrust that accounts for the current and potential implications of climate and disaster risks. In general, items for consideration include:

- Ability of the option to generate social and economic benefits to reduce current and future vulnerabilities/sensitivities and enhance current adaptive capacities of the local residents;
- Feasibility of pursuing the thrust option/s given the magnitude and spatial extent of natural hazards;
- Potential impacts climate change (i.e. extremes and variability) on the thrust option and its implications to the sustained economic productivity;
- Required mitigation and adaptation measures to ensure sustained productivity;
- The expected impacts of the development thrust to the stability and ecological balance of the natural environment and its ability to reduce hazards and climate change associated impacts;

Tools for evaluating development thrust/strategy options include Social Cost-Benefit Analysis (SCBA), Planning and Budgeting System (PBS), Land Suitability Assessment (LSB), Checklist Criteria and other innovative techniques. Illustrated below is a sample goal achievement matrix used for evaluating development thrust options.

Selection of the preferred spatial strategy

Spatial strategy generation involves the translation of vision, goals and objectives and the preferred development thrust in spatial terms. The spatial strategy serves as framework to guide the detailed allocation and location of the various land use categories. In the context of climate and disaster risks, the spatial strategy generation provides an opportunity for the LGU to look at alternative options for spatial development with informed information on issues and concerns related to disasters and climate change. Different options can be generated depicting the configuration of the built and un-built environments considering possible spatial management options that municipalities can adopt and pursue to address current and prevent future risks/vulnerabilities. Sample risk reduction and management (including the addressing vulnerabilities to climate change) principles can be applied in the generation of spatial strategy alternatives/options such as:

- 1. **Risk avoidance or elimination** This strategy involves removing the risk trigger by locating new expansion areas outside of potential hazard susceptible areas. This can also be achieved by encouraging open spaces and establishment and extension of buffer easements (i.e. coastal, river). However, it has to be noted that nationally prescribed easement regulations can be extended to factor in the possible increase in frequency and severity of hazards due to climate change (i.e. storm surge, floods, sea-level rise).
- 2. Risk Mitigation This strategy can be implemented if the strategy of avoidance/elimination can not be applied and/or the spatial strategy involves retaining existing urban use areas and resource production areas in its current location. Measures for mitigation (or adaptation) can be applied to reduce potential risks/vulnerabilities by changing physical characteristics or operations of a system or the element exposed to hazards. It can take on the following subcategories:
 - a. Mitigation Imposing building design regulations to enhance structural resistance/resilience to hazards and implementing engineering based measures (i.e. flood control, sea-wall, slope stabilization). However, such measures (which often entail significant costs) will be dependent on the capacities of the LGU and property owners to implement and conform to such measures. Non-structural mitigation, to some extent, can also be considered as mitigation measures, such as the rehabilitation of upland and coastal forests to reduce hazards (i.e. renewed upland forest cover can reduce magnitude and extent of floods in low-land areas or rehabilitating coastal mangrove areas to reduce magnitude of storm surges), changing production techniques (climate sensitive agricultural production practices, shift to climate resilient varieties), constructing production support infrastructure such as water impoundments and irrigation.
 - b. **Duplication or Redundancy** increasing system sustainability by providing back-up support for systems or facilities that may become nonfunctional/operational after a hazard impact. This can be applied by establishing redundant access/linkage/distribution systems (i.e. establishment of alternate transportation routes, looping and back-up systems for water distribution, establishing alternative critical point facilities such as schools and hospitals).
 - c. **Spatial separation** increasing system capacity and robustness through geographic, physical and operational separation of facilities and functions through multi-nodal spatial development. It proposes a strategy option of not centrally placing critical services (i.e health, educational, commercial, governance based facilities/services) in one location.
 - d. **Preparedness measures** are mostly non-structural measures that reduce the socio-economic vulnerabilities or improve coping mechanisms of communities at risk by improving capability to rescue, salvage, and recover; installation of early warning systems; increasing level of awareness through information, education, and communication (IEC) programs; and developing contingency/ evacuation plans. These measures can be pursed and implemented in areas potentially exposed to hazards where short to medium term solutions are not feasible (i.e. massive relocation).

Table 4.18 Sample Spatial Strategy evaluation

	iable 4.10 Sample Spanial Strategy evaluation	y evaluation						
	Critical	Weight theight	Altern. Trend E	Alternative 1: Trend Extension	Alterna Conc Develo	Alternative 2: Concentric Development	Alternative 3: Multi-Nodal Development	tive 3: Nodal pment
			Rating	Weighted Rating	Rating	Weighted Rating	Rating	Weighted Rating
	Financial capacity of the LGU to realize the spatial option (i.e. infrastructure requirements and available public investments), Including investment requirements for mitigation and adaptation	15%	4	9.0	4	9.0	7	0.3
2	Impact on general image and attractiveness of the Municipality	2%	2	0.1	Μ	0.15	m	0.15
Μ	Is the efficient access and linkages between the various functional zones feasible (physically and in terms of cost and potential impacts of hazards)	10%	m	0.3	4	0.4	2	0.2
4	Will the option encourage the equitable distribution of economic benefits within the municipality	2%	4	0.2	4	0.2	4	0.2
2	Will it contribute to ecological balance and stability	10%	м	0.3	4	0.4	4	0.4
9	Will the spatial option significantly reduce exposure and promote long term human security from natural hazards	15%	2	0.3	2	0.3	4	9:0
7	Potential scale and cost for disaster response, recovery and rehabilitation given the potential exposure	%5	2	0.1	4	0.2	4	0.2
∞	If the option is pursued, are current and future capacities enough to comply with the required risk reduction and management related land use and structural development regulations (building design, Floor Area Ratio, risk transfer mechanisms)	15%	2	0.3	7	0.3	m	0.45
6	Will it encourage the preservation of prime agricultural areas	%5	m	0.15	4	0.2	m	0.15
10	Does it ensure the uninterrupted delivery of basic social support services	10%	7	0.2	7	0.2	4	0.4
	Ability of the LGU to effectively monitor and enforce required development regulations and policies	2%	m	0.15	4	0.2	κ	0.15
	Weighted Score	100%	2	2.7	.y	3.15	3.2	2
Scorin	Scoring System:		.,	m		2	-	

3-High contribution to the achievement of desired goals, moderate cost requirements to achieve goals, existing capacities and/or capabilities of constituents or the government to achieve goals are present 4-Very high contribution to the achievement of desired goals, Low cost requirements to achieve goals, existing capacities and/or capabilities of constituents or the government to achieve goals are highly compatible

Note: The above evaluation tool is for demonstration purposes only. LGUs can develop or adopt its own evaluation tool.

1-Low contribution to the achievement of desired goals, very high cost requirements to achieve goals, very limited capacities and/or capabilities of constituents or the government to achieve goals 2-Moderate contribution to the achievement of desired goals, high cost requirements to achieve goals, limited capacities and/or capabilities of constituents or the government to achieve goals

- 3. **Risk sharing or risk transfer** is another option that can be pursued to justify the location of built and unbuilt environments in hazard prone areas. It is the shifting of the risk-bearing responsibility to another party, often times involving the use of financial and economic measures particularly insurance systems to cover and pay for future damages. However, this strategy should consider the current and future financial capacities of the exposed elements in accessing these instruments.
- 4. **Risk retention or acceptance** this is the "do-nothing" scenario where risks are fully accepted and arrangements are made to pay for financial losses with own resources. However, this strategy can only be applied if current or future exposed elements will have the resource capacity to carry the burden of recovering from risks.

In the context of climate and disaster risks, when evaluating spatial strategy options, the evaluation criteria should be able to assess the various options in terms of following considerations:

- Reduces current and/or prevent future risks;
- Ensure the uninterrupted delivery of high quality and basic social support services,
- Ensure and maintain inter- and intra area linkages;
- Required risk mitigation measures (through the imposition of zoning regulations and hazard resistant design standards) are within the current and future of the LGU and the private sector;
- Risk can be managed within acceptable thresholds especially when retaining or expanding built-up areas within the hazard prone areas.

Illustrated below is a sample criteria for evaluating spatial strategy options with emphasis on climate and disaster risks (refer to Table 5.20 Sample Spatial Strategy evaluation).

Upon selection of the preferred development thrust, preparation of the structure plan map can proceed. The structure plan map is a schematic representation of the chosen spatial strategy. It indicates the approximate location of areas for settlement development, location of key production systems, areas for protection and the various linkage systems. In the context of DRR-CCA, in the preparation of the structure plan map, emphasis should be given to:

- Indicative location of new expansion settlement areas in relation to hazard susceptibilities;
- Priority areas where mitigation and adaptation measures should be implemented for current or future settlement (expansion) areas, including production areas identified as highly vulnerable to natural hazards and climate change impacts;
- Key linkage and distribution systems with emphasis on its role for disaster risk reduction and climate change adaptation (redundant transportation routes for improved area access, response and evacuation, back up systems for water distribution);
- Major risk mitigation infrastructure to be established (flood control, sea walls, slope stabilization, etc.);
- Designating highly susceptible hazard areas as protection (buffer easements) or natural resource production areas (where production can be pursued if feasible);
- Indicating key protection areas for rehabilitation and conservation with emphasis on its contribution to management of climate and disaster risks.

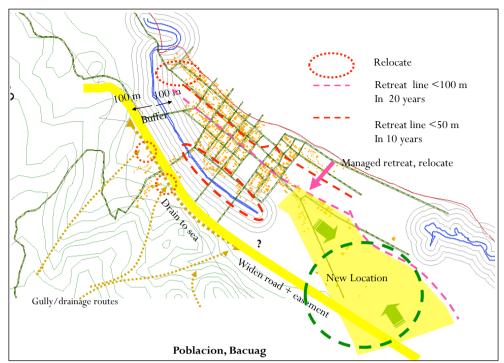


Figure 4.4 Sample Spatial Strategy Option. The Spatial Strategy plan map of the Municipality of Bacuag, Identifies the new expansion areas, establishment of buffer easements along rivers, and its incremental approach to adaptation in addressing current settlement risks along the coast and rivers though managed retreat/relocation. It also indicates the need to widen the road to ensure ease of access during evacuation and response operations (Source: Adopted from Mainstreaming Disaster Risk Reduction and Climate Change Adaptation in the Comprehensive Land Use Plans Report, NEDA-UNDP-HLURB, 2012)

Climate and Disaster Risk Sensitive Land Use Planning

At this stage in the planning process, the land use plan will translate the development thrust and spatial strategy that describes how, why, when, and where to build, rebuild, and preserve¹². It involves four major steps namely, balancing land demand and supply; designing the land and water uses schemes (covering location and allocation); formulating the policies for land development and resource use management; and identification of priority programs and projects. It is assumed that most of the identified planning challenges issues and challenges related to CCA-DRR, and how these will be addressed in terms of inventions (whether spatial and non-spatial in context), have already been articulated in previous steps (i.e. situational analysis, visioning, goals and objectives setting, development thrust, and spatial strategy). This would allow decision-makers make necessary adjustments in the land use plan, one that would effectively address the potential impacts of natural hazards and climate change.

Designing the land use scheme and land use policy options

The land use design scheme deals with the allocation and location of the various land use categories generally based on the projected service requirements, location standards, land suitability studies, costs, aesthetics, accessibility and other considerations. Land use policies refers to specific guidelines, methods, procedures, rules and forms that will guide the use of lands. In the context of CCA-DRR, emphasis will be given to design approaches/options for risks reduction and climate change adaptation with emphasis on approaches for reducing exposure and addressing vulnerability/sensitivity, and enhancing adaptive capacities. These mitigation and adaptation approaches shall be incorporated in the the area location/allocation and land use policy formulation. Below are some recommended policies in designing the land use scheme/s and policy statements covering the four general land use policy areas.

Urban Use Areas

- **Minimize hazard exposure** this policy approach for settlement area development is an application of risk avoidance/elimination. It entails the location of settlements where hazards are not present and/or risks associated with locating within hazard prone areas can be effectively managed over the long-term by minimizing elements exposed;
 - This policy option is pursued under the notion that future risks will be averted which is more sustainable compared to risk reduction through mitigation.
 - Minimizing exposure (within hazard prone areas) can be done through density control measures such as decreasing the Floor Area Ratio, increasing the minimum lot sizes, and/or designating such areas as parks and open spaces, buffers or natural resource production areas.
 - These development control measures restricts new development in order to significantly reduce future elements exposed to hazards.
 - Although in reality, it is widely recognized that very little lands (relatively safe areas) are available to accommodate future demands. In such cases densification of relatively safe areas and mitigation of structures within hazard prone areas should be employed.

Densification of identified safe areas

- Densification of existing and future expansion areas should be encouraged within identified safe areas (or highly suitable areas where risks can be managed cheaply and effectively) to maximize utilization of lands.

¹² Housing and Land Use Regulatory Board, CLUP Guidebook: A Guide to Comprehensive Land Use Planning, Volume 1, 2006. HLURB-CCC-UNDP-AusAID | PROJECT CLIMATE TWIN PHOENIX

- This approach can be adopted to prevent future expansion in hazard prone areas, reduce future exposure and/or minimize potential costs for mitigation especially when very little lands are available to accommodate future urban use areas.

Reduce risks/vulnerabilities through mitigation measures

- When existing and urban expansion settlement areas are within hazard prone areas, necessary mitigation measures should be in place (through structural and non-structural measures) to safeguard structures and the population.
- In reducing building vulnerabilities/sensitivities, proper building structural design standards (specific to the type or combination of hazard/s) using national and special building and structural codes should be enforced and monitored;
- Vulnerabilities can also be reduced through the establishment of off-site risk mitigation structures (flood control, flood water retention ponds, sea wall, wave breakers, slope stabilization) whenever feasible.
- Enhancing adaptive capacities may involve non-spatial related measures such as increasing level of awareness, improving income levels, improved capacities to access/afford post disaster economic protection and disaster preparedness/evacuation plans;
- Decisions to situate urban use areas within hazard prone areas should consider the feasibility and conformance to the new risk reduction related regulations and whether it can be sustained over the long term.

Prioritizing residential areas, critical point facilities and other government owned/ managed facilities to be situated in relatively safe areas

- This is in support of ensuring human security by prioritizing residential areas over other uses to be situated within less susceptible hazard prone areas. This is under the notion that non-residential uses such as commercial and industrial have a higher capacity to conform to building/development restrictions and implement disaster management options.
- Aside from residential areas, key infrastructure related point facilities such as those related to water (pumping stations, water treatment plants) and power related point facilities (sub-stations, and power plants) and other institutional facilities (schools, government buildings, evacuation centers) should also be strategically located to minimize major disruptions in the delivery of basic utilities and critical social support facilities.

Prioritizing safety over accessibility when it comes to location standards

- This pertains to the location of propulsive growth areas or central facilities (i.e. commercial and residential growth centers, schools, hospitals, governance, point utilities,) being located within hazard prone areas due to location standards that favor accessibility (convenience) rather than long term safety (performance).
- Settlement expansion tends to expand around and in near proximity to these centers which may increase future risks especially when these propulsive centers are within or adjacent hazard prone areas.
- When locating new propulsive centers/establishments, the overall design should anticipate the associated settlement growth surrounding it.
- Location should lean more towards safety location standards and not on accessibility standards.
- Accessibility can be considered over safety provided that risk mitigation measures (i.e hazard resistant design standards, major engineering measures) can be enforced and implemented; and ensuring that current and future private and public capacities can adapt to potential impacts.

• Mitigation measures should account for the expected changes on the severity and frequency of hazards.

- The severity and frequency of rapid (floods, landslides and storm surges) and slow onset hazards (i.e sea level rise) may increase due to climate change.
- This may entail the anticipation of the future spatial extent and magnitude of hazards in deciding to retain or extend existing mandatory easement adjacent to existing and new settlements.
- This often requires special studies and may require coordination with the mandated agencies

Cost for mitigation should be shared by both the LGU and the community.

- These can be in the form of the imposition of higher property taxes (disincentive) to generate revenues to sustain local/autonomous efforts for disaster risk mitigation and climate change adaptation (i.e. land banking, relocation, rehabilitation/retrofitting of public facilities).
- Encouraging mandatory retrofitting of existing highly vulnerable structures can also be pursued through incentives (property tax holidays).

• Situating settlement areas away from environmentally critical and sensitive areas

- This would minimize anthropogenic stresses (i.e. extraction of resource, encroachment, habitat destruction) to ECAs as a result of being in close proximity to settlement areas.
- Decisions in locating propulsive growth centers should consider its proximity to these ECAs.

• Incentive instruments to facilitate risk mitigation/climate change adaptation

- Pertains to instruments for incentives (i.e. tax discounts/holidays, allowing variances relative to regulations) for establishments adopting onsite innovative climate smart and eco-friendly technologies and practices.
- This shall cover energy efficiency (using on site renewable energy generation technologies) and water management (rain harvesting, water recycling/treatment).
- These practices should be recognized by the LGUs and incentive packages should be provided since these promote water sufficiency and the mitigation of greenhouse gases.

Production Areas

These cover the natural resource production areas such as crop production areas, fisheries, and forest based production areas. These areas can be situated in hazard prone areas where implementation of risk reduction and adaptation options are pre-requisites to reduce potential economic loses due to sudden and slow onset hazards.

- Changing production practices to anticipate/adapt to potential changes in climate pertains to adopting changes in resource production techniques/practices that adapt to potential changes in the climate. In the context of agricultural production, this may entail a better understanding of seasonal climate parameters through:
 - weather forecasting
 - early warning systems to influence current planting and harvesting schedules;
 - using hazard resistant and early maturing crops (includes changing spatial location of crop types relative to hazard) to mitigate climate extremes;
 - encourage crop diversity or pest resistant crops;
 - site preparation (i.e. slope stabilization/control, soil conservation measures);

Strategic location of climate proofed production support facilities

- This pertains to considerations in locating facilities that house farm inputs, implements, machinery and other storage facilities in areas where risks can be managed effectively;

- Strategic location of community level temporary/permanent climate proofed holding facilities can be established to address potential losses as a result of climate extremes.

• Encourage agro-forestry production in upland or sloping areas

- Establishment of agro-forestry production (i.e. long lived fruit and multipurpose trees as an alternative to cultivated crop types) within sloping and forest buffers can be a good strategy in GHG mitigation, rehabilitation/increase vegetative cover, watershed management, stabilizing slopes and complement nearby forest ecosystems.
- It is also a good way of maximizing idle upland agricultural lands and increase derived economic benefits to enhance adaptive capacities and reduce sensitivities of farmers.

Resource use within sustainable levels

- This recognizes the need to regulate extraction and/or activities that are within the capacity of the environment/s for natural regeneration and carrying capacity levels.

Managing water sources

- In light of the potential impacts of climate change to water resources (specifically impacts to water supply due to decrease in rainfall in certain areas), interventions must be in place to secure water demand requirements for natural resource production.
- Establishment of water impoundment facilities (community based or farm site level) with support irrigation networks should be encouraged.
- Innovations in maximizing the use these facilities other than impoundment (i.e. utilizing them as inland fishponds in certain times of the year) can be encouraged.
- Also, tapping ground water reserves, in a sustainable manner taking into consideration the recharge levels and the potential variations in rainfall values due climate change, can also be pursued.

• Encouraging post disaster economic protection measures

- To mitigate potential damages/losses, property owners engaged in resource production should have the capacity to access/afford post disaster economic protection/financing (i.e. crop/property insurances).

Protection

Protection areas are private lands, public lands and water areas that are set aside for conservation, preservation, and rehabilitation because of their long-term strategic benefit and because of the observed and projected impact of climate-related events and disasters to these areas¹³. Designating protection land uses can significantly contribute to disaster risk reduction and climate change adaptation using the ecosystem based approach. In general, the establishment of protection areas can reduce settlement and population exposure to prevent future risks, enhance the quality of the environment to increase its adaptive capacity to withstand impacts of climate change, contribute to the mitigation of GHG and reduce the impacts of hazards. Some considerations in designing the land use scheme and formulation of policies.

Implement easements as an effective strategy in managing risks

- The establishment of buffer easements (i.e. coastal, river, forest buffer) and designating certain hazard susceptible areas as no dwelling units are forms of reducing exposure to hazards.
- Mandatory easements (prescribed minimum easements based on national laws) can be extended to account for the possible changes in extent and magnitude of hazards due to climate change

- which can be determined though empirical studies (i.e. flood modeling incorporating climate change projections on the one day extreme rainfall patterns)
- One example is exceeding the minimum coastal easement from 20 meters to a distance that would accommodate the projected change in the coastline associated with sea level rise, and the run-up distances/inundation areas of storm surges.
- Extending easements along rivers (where flood modeling studies can establish peak flood elevation and velocities) can be set aside as either part of the protection land uses (as buffer strips/ open spaces left in its natural state), production (if these can be sustainably utilized for resource production despite the expected intensity and recurrence of the hazard), or even urban use areas in the form of open spaces such as linear/forest parks to minimize, prevent and even eliminate population and property risks.

Field Demarcation/Delineation of hazard prone areas

- Another form of risk reduction is the demarcation of highly susceptible hazard areas.
- The main intention is to prevent encroachment and future exposure/disasters; and enhance local awareness on the spatial location of hazards.
- These can be set aside as open spaces or natural buffer strips devoid of any development, set aside as public open recreational spaces, or natural resource production uses where immediate and/or long term impacts can be mitigated and sustainable resource extraction can be employed.

• Protection of forests/watersheds

- Sustained rehabilitation and protection of upland forests and watersheds (falling under protection forests) as strategies for risk reduction and climate change adaptation.
- Forest areas can act as carbon sinks to increase environmental capacity to reduce atmospheric GHG levels, enhance water absorptive capacity to reduce flood surface runoff and delay arrival times in low lying areas, increase slope resilience to failure (soft mitigation measure), reduce soil erosion, contribute to water sufficiency, improve air quality and enhance biodiversity.

Protection and rehabilitation of ecologically sensitive and critical habitats

- The strict protection and rehabilitation of critical and sensitive habitats, in the context of CCA-DRR, can be viewed as measures for enhancing adaptive capacities of natural environments to cope with changes in the climate.

Synergy and convergence of protection policies across Municipalities/Cities

- Watershed areas encompass administrative boundaries. Inter-municipality convergence and synergy of land use policies emphasizes the importance of establishing inter-LGU coordination/synergy to facilitate and promote convergence of actions/policies in addressing disasters and climate change including the reducing and managing common/shared risks across municipalities/cities.

Infrastructure and utilities

The manner in which linkage/access systems, distribution utilities designed and how mitigation measures are constructed can either increase or become a source new risks over time.

• Strategic establishment of transportation access/routes as a means of redirecting settlement growth -

- Establishing new transportation routes leading towards relatively safe areas can be employed to redirect settlement growth in more sustainable/suitable areas.

- It has to be noted that areas adjacent to roads, especially when these transect hazard prone zones, should be regulated and monitored regularly to prevent unplanned settlement growth and generation of new risks.

• Strategic establishment/upgrading of utility distribution systems

- Settlement growth are encouraged when necessary distribution systems are present (power, water and communication). The strategic establishment of distribution networks can be a good way of redirecting and restricting growth to prevent the future risks.
- The decision to establish new or upgrading of distribution systems should be mindful of whether the growth of settlements (increasing exposure) especially when these are located in highly susceptible areas can be managed and sustained overtime.

Mitigation measures should be adjusted to account for the impacts of climate change on the magnitude and severity existing hazards

- Mitigation measures designed without consideration of projected trends in extreme daily rainfall due to climate change is an example of maladaptation. Flood control works designed to withstand 'historical probabilities of flooding (i.e. without adequate consideration of climate change) may not provide adequate protection. However, this may require flood and climate simulation; and special feasibility studies.
- Urban drainage systems should be able to accommodate higher water runoff associated with extreme one day rainfall events to minimize urban flooding;

Climate proofing/mitigation of key distribution and access systems

- Among the major impacts of hazards is the major/prolonged interruptions on the delivery of key utilities (power, water, and communication, transportation/access).
- Ensuring the uninterrupted delivery (or minimizing disruptions at acceptable levels) and access through climate proofing of existing and new distribution networks should be considered and implemented as much as practicable.

Establishing strategic complimentary or back-up access and distribution systems

- Ensuring uninterrupted access and delivery of key utilities can be achieved through the establishment of alternate transportation routes and looping distribution networks in cases where the main networks are severely affected by hazards.
- Policies in encouraging community-based or household level water and electricity related facilities (i.e. water storage tanks, establishment of community based power generation facilities) and establishment of alternative routes to access key functional zones.

Sample land use policies, specific to flood hazard, can be incorporated when formulating policies of identified settlement growth areas. Other policy options for other hazards can be prepared and incorporated when certain growth areas/land uses are within identified hazard prone areas. These land use policies can either be translated as programs and projects or regulations which can be included in the hazard overlay zones in the zoning ordinance.

Table 4.19 Sample Land Use Planning Options for Flood hazard areas

Parameters	Sample Land Use Policy Options
Site selection and development controls	 Ideally, situate settlement areas outside of flood prone areas. If unavoidable, institute other risk mitigation measures such as density control and building design regulations, establishment of evacuation routes, and/or establishment of flood control infrastructure. Redirect settlement growth by locating propulsive centers and central facilities outside or in low susceptible flood areas where risks can be managed within acceptable levels.
Density Control	 Encourage Low density development in highly susceptible areas and moderate to high density development in areas less susceptible to floods assuming building design standards/regulations are followed. Density and bulk control measures include Floor Area Ratio, minimum lot sizes and building height restrictions; Increase in density can be adjusted in high susceptible areas when property owners have capacities to employ structural mitigation (conform with building design standards or contribute/share the costs for flood mitigation infrastructure);
Building design	 Lowest floor of structures must be 2 feet (freeboard) above the estimated 50-year base flood elevation (or 100 year depending on agreed flood level) using climate change rainfall projections If a critical facility (i.e. hospitals, government building, fire/police stations, evacuation sites, jail, emergency management, and facilities that store highly volatile, hazardous, toxic materials) higher protection standards will be required, where free boards are above the 100 (sample) year base flood elevation. Design should also account for the expected flood water flow velocity and direction. Encourage column or flow through crawlspaces rather than filling as the means in elevating buildings to minimize flood water flow obstructions and increase in flood heights as a result of diminished flood plain storage capacity. When landfilling is employed, flood storage measures must be constructed either onsite of within the flood plain. Structures can have high foundation walls, stilts, pilings. and occupants have access to the roof from inside the dwelling unit; Foundation of buildings should be constructed to account for erosion, scour or settling. Encourage onsite water storage facilities
Strengthening and retrofitting, of existing buildings	 Legally require retrofitting of existing buildings high-risk or highly vulnerable buildings using recommended building design standards as prescribed in the Building Code and the Structural Code of the Philippines. When buildings and/or areas are totally damaged by floods, consider other options like relocation, land swapping or land pooling.

Parameters	Sample Land Use Policy Options
	•Situating critical point facilities outside of hazard prone areas to ensure accessibility and minimize service disruption during and after flood events.
Protection of critical lifelines	•Climate proofing of critical access (roads) and distribution systems (water, power and communication facilities).
Protection of children meinted	•Establishing redundant/back-up and looping systems as alternative systems for access and distribution.
	•Designing drainage or temporary storm water holding facilities to accommodate 25-50 flood water volume (whenever feasible)
	•Encourage open spaces (parks and other buffers) or agriculture production areas in flood prone areas to minimize settlement area and population exposure.
Open space preservation	•Establish easements and river bank protection measures and maintain riparian vegetation to prevent erosion.
	• Protection of wetland areas to absorb peak flows from floods.
Relocation	•Mandatory incremental relocation of highly at risk and vulnerable communities/families
	•Real estate tax holidays to owners who retrofit structures based on new design standards
Financial incentives and disincentives	• Provision new development in suitable areas to locate new growth areas where necessary amenities are available.
	•Impose higher real estate taxes for properties benefiting from major flood control infrastructure
	•Reforestation of upland forests to enhance vegetative cover, increase water absorptive capacity of watershed areas to manage volume and delay arrival of surface runoff
	•Establishment of flood mitigation infrastructure
Other policy parameters	•Contingency plans within identified high-risk areas
	•Use of flood resistant crops or change cropping patterns/types
	•Land banking in identified growth areas as resettlement sites to accommodate families within high risk areas

Identification of priority programs and projects.

Programs are set of projects in support of the realization of the CLUP. These are linked to the set of goals, objectives and success indicators; and the operationalization of the desired land use scheme and policies. Various development challenges and the interventions to address climate and disaster risks have already been articulated in previous steps. This is the part where comprehensive programs, specific projects and other support legislation are enumerated to support the various strategies relevant to the reduction and management of climate and disaster risks. Sample program and projects are, but not limited to, resettlement/ relocation programs; hazard mitigation infrastructure projects; IEC programs for increased level awareness on disaster and climate change; disaster preparedness programs; formulation of river-basin management plans (in coordination with other municipalities); reforestation projects, comprehensive agricultural extension program (emphasis on climate change resiliency); capacity and capability building of executive and legislative officers in support of CCA-DRR; Programs for job creation and livelihood, road infrastructure projects (climate proofing of existing roads), and potable water infrastructure program. Also, support local legislation can be identified to implement the CLUP and address other specific/special issues. These may range from local ordinances providing incentives to eco-friendly industries/housing units (employing green building design), employing hazard retrofitting, special ordinances designating protected areas in watershed/forest areas, adjustments to be made to the property tax rates or imposition of special levies for revenue generation for disaster mitigation related infrastructure (refer to sample priority programs-projects-legislation matrix).

These programs, projects will be interfaced and implemented in phases through the Comprehensive Development Plan (CDP) and funded through the Local Development Investment Program/Annual Investment Plan (LDIP/AIP). Local legislation may form part of the legislative agenda of local governments.

Table 4.20 Sample Priority Programs-Projects-Legislation

Programs, Projects, Activities, and Legislation	 Opol Zero backlog health program Hazard retrofitting of existing health related facilities 	 Opol education modernization program Hazard retrofitting of existing educational related facilities 	 Formulation of the Municipal and Barangay level DRRM Plans Formulation of the Local Climate Change Action Plan Formulation of contingency plans for various hazards Storm Surge Modeling Project Earthquake Hazard Modeling and Risk Assessment; Establishment of the Building Information Management System (BIMS) 	 Comprehensive Opol shelter program Local ordinance on the provision of incentives to encourage building retrofitting
Objectives	Establishment of 22 new BHS that are disaster and climate risk resilient by 2023 Retrofitting and rehabilitation of 6 existing BHS and existing Municipal hospital against potential hazards affecting the structure	Establishment of additional 139 classrooms that are disaster and climate risk resilient in safe locations and reduce cases of disruption of classes due to structural and equipment damage Retrofitting and rehabilitation of 10 existing classrooms to mitigate potential hazards affecting the structure.	Increase level of awareness of local population on emerging issues related to disasters and climate change including measures for adaptation and mitigation Encourage the retrofitting/upgrading of 405 existing housing structures	highly vulnerable and at risk to flooding, sea level rise and storm surges Establish new housing units to accommodate future households (6,420)
Goals	Ensure the adequate and efficient delivery of basic social support facilities/ services security by increasing the level of adaptive capacities of the population and establishment of sustainable and well adapted housing units			
Vision Statement	A vibrant and sustainable commercial, industrial and tourism based economy propelled by pro — active and self reliant citizenry living in a water sufficient, adaptive and balanced environment with competitive and pro-poor governance.			

Table 4.20 Sample Priority Programs-Projects-Legislation

Priority Projects, Activities, and Legislation	 Crop and Livestock Integrated Farming Systems Development Project, Establishment of Community-Based Agro-Processing Facilities for High-Value Commodities; Entrepreneurial Training Workshop for Farmers/Fisherfolks; Establishment of the Opol Central Warehouse; Value-Chain Study for Major Products (i.e. Banana, Abaca, Coconut); Coconut); Goround and Rehabilitation of Upland Barangay Farm-to-Market Roads; Ground and surface water accounting study; Irrigation and water impoundment system study for Agricultural Production; Establishment of Technology Demo Sites for Emerging and Innovative Farming Practices and Technologies. Opol Sustainable Non-Timber Forest Product development and marketing Project; 		
Objectives	Increase areas allocated for agricultural production Reduce cases of land conversion of prime agricultural lands to non-agricultural uses Established climate proofed/risk resilient food warehouses Increase in the average per hectare yield for rice and com Established climate proofed/risk resilient post harvest facilities Reduce damages to farm equipment and post harvest facilities Increase in agricultural crop production areas with access to water impoundment facilities Increase in agricultural crop production areas with access to irrigation of alternative water sources (surface and ground) for irrigation Decrease amount of damage to crops due to flood, severe winds, drought through sound and climate proofed production techniques Establish forest production areas and ensure sustainable production/resource extraction techniques		
Goals	Ensure local food security and optimum productivity of agriculture and forest based industries		
Vision Statement	A vibrant and sustainable commercial, industrial and tourism based economy propelled by pro – active and self reliant citizenry living in a water sufficient, adaptive and balanced environment with competitive and propoor governance.		

Table 4.20 Sample Priority Programs-Projects-Legislation

Priority Projects, Activities, and Legislation	 Awang-Patag Light/agri-industrial Area Feasibility and Site Development Plan Opol Coastal Eco-Tourism Circuit Plan Barra commercial center redevelopment project Poblacion-Patag-Awang Municipal Road Construction Lot Purchase/Land banking; Establishment of the Building Information Management System (BIMS); Local ordinance providing incentives to establishments using eco-efficient production/operation practices; Local ordinance on the provision of incentives for economic enterprises participating in building retrofitting;
Objectives	Increase area allocation for economic based establishments tourism, agri-industrial, forestry and other service related facilities/establishments Increase in locally employed residents Increase number of establishments employing water augmentation practices Increase number of establishments using on-site renewable energy technologies Increase number establishments employing structural mitigation measures and/or Decrease in number of exposed business establishments to hazards Decrease economic losses due to hazards
Goals	Establish climate smart, risk resilient and environment friendly industries and services
Vision Statement	A vibrant and sustainable commercial, industrial and tourism based economy propelled by pro – active and self reliant citizenry living in a water sufficient, adaptive and balanced environment with competitive and propoor governance.

Climate Risk Sensitive Zoning Ordinance

The Zoning Ordinance is the legal/statutory tool to implement the Comprehensive Land Use Plan. It is a translation of relevant hazard risk mitigation and climate change adaptation related policies articulated in the CLUP which can be translated into zoning provisions. Zoning provisions may range from special building design restrictions, density control regulations, no-build provisions, restricted uses within hazard susceptible areas. Areas can also be declared as risk management districts/zones where special regulations can be imposed to fast track the process of risk reduction. Among the objectives of the hazard overlay are the ensuring the safety of building occupants; prevent substantial damage to structures and its contents; protect adjacent properties from hazards associated with building damage/failure resulting to injuries due to substandard building design; ensure ease of access during disaster response, rescue and evacuation;

Hazard Overlay Zones

In the formulation of the zoning ordinance, the hazard overlay zones can contain additional provisions on land/structural development regulations to imposed to base zones. The hazard specific overlay zone/s should contain, at the minimum, the following recommended provisions or options:

- **1. Hazard Overlay Map -** Visual representation of the extent/bounds of the zone. This is represented as an overlay map and a sub-set of the official zoning map (refer to Figure 4.5)
 - Flood modelling maps generated through studies conducted by mandated agencies (i.e. PAGASA, MGB) or any other entities where flood modeling maps have been peer reviewed and validated;
 - Flood modeling maps should depict the annual chance of occurring, estimated flood height/elevation, estimated flow velocity and flow direction which will be the basis for determining hazard resistant structural design specifications to both address flood heights and water velocities;
 - Section 211 Flood Loads of the Structural Code of the Philippine (NSCP) prescribes a base flood of 1 percent chance of being equaled or exceeded in any given year (100 year flood) as basis for the Design Flood Elevation¹⁴ which are applicable for structures covered by the NSCP. There are no related provisions on the base flood mentioned in the National Building Code.
 - Further categorization of the flood overlay zone into sub-zones (i.e. High, Moderate and low) or based on flood heights (i.e. 0.2-0.5 meters, 0.5-1 meter, 1-2 meters, 2-5 meters and above 5 meters) can be employed where different provisions can be applied in the sub-zones.

FLOOD HAZARD OVERLAY ZONE ir Rainfall Retum Period Simulation, Year 2020 (282.00 mm rainfall in 24 hours) FL-0Z Sub-Zone 3- >1.00-2.00 Meters FL-OZ Sub-Zone 4- >2.00-5.00 Meters FL-OZ Sub-Zone 5- >5.00 Meters FL-0Z Sub-Zone 2- >0.5-1.00 Meters FL-0Z Sub-Zone 1- >0.2-0.5 Meters MUNICIPALITY OF OPOL PROVINCE OF MISAMIS ORIENTAL Region 10-Northern Mindanao Flood Overlay Zone - Flood Depth Baranagay Boundaries Banangay Bounduries, MPDO-20 14 Climate Adjusted Bo od Hazand May CCC-PAGASA-UPTGGAP, 2014 LEGEND 1 in 100 Year 341BJ 941BK 41BL M 18N 24180 4189 941BQ #1BR 340 BH 24081 24087 340 BK 240BL 340BN 24080 340BP 240BQ 340BR 24085 2408 239R 239BR 138R 1388 380 238/// Z388H 18802 238BN 23880 23892 23885 23.7R 237.0 237.V 237 W 23.78J 237BN 23780 23.75 236R 2368 23 6BN 23680 235R 234R 234BE 234Z 233R 2338 2338E 23383 233BK 23.2R 23 28 231R 2318 230R 2308 230 T 2622 22988 22.98 229R 2298 Z29T 229BE 228R 22888 228BD 2288G 228ВН 2288.1 2288 228 BF 22881 2278F 22 783 278H 27R 27.8 2781 27T 2268H 2268G 226R 2268 29 62 226BE 228T Z26V 226// 2583 2258J 225R 2258 Z25T 225V 224BR 224R 224V 223// 223R 2238 223T 22 2R 2228 222 U 222/11 2228R 722Z 221W Z1X 221BE 221BF 221BR 221R 2218 220 BE 22088 220R 2208 2200 22011 220X 220BR 219R 219V Z612 21980 219BR 21983 2198 T612 N86H 21880 218R 2185 Z18.T 217 R 217.8 217T 71.27 18212 21671 216 BN 21680 216 BP 21680 216 BR 216 BS 216R 216T 21681 168 216V 2168J 216BL 21580 215BR 215R 2158J 2168 215T 214R 2148 214BC 14BD 214BE 148F 14BG 148H 46 21483 21480 21480 214BR 214T 214BP 21380 213BP 21380 213R 213// 213BC 2138E 2138 213T 21381 213BL H280 H28Q 212R 1286 212BH 21281 212BJ 212BL 128P 2128 12BK 211R 118 2118 211T 2110 N=0.16.8

Figure 4.5 Sample Flood Hazard Overlay Map, Barangay Barra, Municipality of Opol, Misamis Oriental

- **2. Zone Coverage/Boundaries-** Zone coverage pertains to areas which will provide the coverage of the hazard overlay zone where the additional zoning provisions will be applied.
 - Enumeration of actual lot numbers which are within the flood overlay zone. This can be done through map overlaying (hazard and cadastral maps);
 - It can also be represented as meridional blocks coverage which can be further validated in the field during the locational clearance review and issuance process (refer to Table 4.21 for a sample zone coverage/boundary description using meridional block system);
 - Special GIS programs can also be used to derive the technical description (jn terms of bearing and distance, longitudinal and latitudinal extents);

Table 4.21 Sample Zone Boundary Description, Flood Hazard Overlay Zone Map

Flood Overlay Sub-Zone	Estimated Flood Depth (Meters)	Meridional Block Coverage (Alpha Numeric Code) ¹
Flood Overlay Sub-Zone 1	0.2-0.5 Meters	220BK, 224BB, 225BB, 225BE, 226BA, 226BB, 226BI, 226BK, 227BA, 227BI, 227Z, 228BG, 228BH, 228BI, 228BJ, 228Z, 229BH, 229BJ, 229BJ, 229BK, 229V, 229Z
Flood Overlay Sub-Zone 2	> 0.5- 1.00 Meters	220BJ, 220BK, 221BJ, 221BK, 221BL, 223BD, 223BH, 224BB, 224BC, 224BD, 224BE, 224BF, 224BG, 224BH, 225BA, 225BB, 225BC, 225BD, 225BE
Flood Overlay Sub-Zone 3	> 1.00-2.00 Meters	221BJ, 221BK, 221BL, 222BD, 222BF, 222BG, 222BH, 222BI, 222BJ, 222BK, 222BL, 223BB, 223BC, 223BD, 223BE, 223BF, 223BG, 223BH, 223BI
Flood Overlay Sub-Zone 4	> 2.00-5.00 Meters	236V, 236W, 236X, 236Y, 236Z, 237BA, 237BB, 237BC, 237BD, 237BE, 237U, 237V, 237W, 237X, 237Y, 237Z, 238BA, 238BB, 238BC, 238BD, 238U
Flood Overlay Sub-Zone 5	> 5.00 Meters	229W, 229X, 229Y, 230W, 230X, 230Y, 231W, 231X, 231Y, 231Z, 232BA, 232BB, 232BD, 232BE, 232BF, 232V, 232W, 232X, 232Z, 233BA, 233BB, 233BC

¹ Listed meridional blocks are only partial of the actual coverage. For presentation purposes only.

- **3. Restricted Uses -** pertains to uses which will be restricted in the said areas such as evacuation centers, critical point facilities, other government related buildings (i.e. municipal/city hall, barangay halls, Regional level government buildings) and other uses handling toxic and hazardous substances.
 - Allowed uses as indicated in the base zones can be reviewed to ensure that a clear list of restricted uses are mentioned and enumerated in the hazard overlay;
 - Recommended restricted use within the zone can include evacuation centers, hospitals, schools, establishments handling toxic and hazardous substances, government related buildings, schools, social welfare buildings, power and water related point facilities;
 - Socialized housing sites, or housing development which would accommodate dwelling units for low to middle income families (with low capacities for employing risk mitigation) can also be considered as

among restricted uses in areas where floods may exceed 0.5 meters. However, these are best addressed during the land use scheme in the CLUP formulation step.

- Limits on restrictions use can be further fine tuned depending on the estimated flood susceptibility level
 or flood heights such as allowing evacuation centers in low susceptible areas or those within flood
 0.2-0.5meters with the condition that these follow the hazard resistant design regulations mentioned
 in other provisions of the hazard overlay zone, but will be disallowed in areas of moderate to high flood
 susceptibility and/or flood heights exceeding 0.5 meters.
- **4. Density and bulk restrictions -** Density and bulk restrictions can be further adjusted to manage the number of elements exposed to hazards. This may pertain to regulations on the maximum lot coverage (expressed as a percentage occupied by the ground level building footprint relative to the size of total lot area), floor area ratio (total floor area relative to lot area), and building height restrictions, etc.
 - Limits pertaining to density and bulk restrictions as prescribed in the Building Code of the Philippines can be retained for as long as flood considerations have been considered prior to the preparation and determination of suitable building densities in the base zones (during the CLUP land use design scheme);
 - Further reduction of the prescribed density and bulk regulations as per Building Code to accommodate
 more open spaces/access systems can be employed such as reducing the maximum lot coverage to
 lessen the building footprint to accommodate more impervious surface within the lot as well as allow
 easy access to building occupants during cases of rescue and recovery;
 - The minimum lot sizes in a particular hazard prone areas can also be included in the provisions. This is to ensure that further subdivision of lots into much smaller lot sizes can be prevented which may lead to further development of dwelling units;
- **5. Building and Site Design Regulations** pertains to special regulations related to building design specifications to mitigate hazards and ensure the safety of occupants, depending on the type of hazard and estimated base hazard magnitude/intensity. In the case of floods, design specifications will be dependent on the identified base flood design elevation. Specifications may include building design (i.e. two storey, multi storey, single storey on stilts), hazard resistant wall materials/design, ground floor building elevation requirements, foundation design, building shape and orientation, and provision of escape hatches (Balconies, roof openings). Site development regulations may include regulations such as minimum area for permeable surfaces, temporary storm water storage ponds, land compacting/filling regulations. It may also include special design standards covering critical point facilities such as hospitals, schools, government buildings. Listed below are recommended provisions which can be included:
 - Relevant provisions of the National Structural Code of Philippines of Flood Hazard resistant design;
 - Lowest floor of structures must be 2 feet (freeboard) above the estimated 100-year base flood elevation using climate change adjusted one day rainfall projections.
 - Wall and foundation construction materials and design should be able to withstand loads exerted by the expected flood water height (meters) and flow velocity (meters/sec) and water submergence.

For other hazards, please refer to relevant sections of the HLURB CLUP Guidebook: Model Zoning Ordinance (Volume 3). It covers hazard overlay zones such as floods, landslides and faults including recommended provisions.

- Foundation of buildings should be constructed to account for soil erosion, scour or settling. Foundations should be constructed in the same stratum and/or pile driven to account for the potential hydrodynamic forces.
- When enclosed spaces are constructed below the base flood elevation, necessary wall openings should be established to allow water to flow inside the enclosed space and ensure that water levels inside and outside the house are balanced to prevent significant structural damage due to hydrostatic forces.
- Walls column or flow through crawlspaces shall be recommended, rather than, in-filling as the means of elevating buildings shall help minimize flood water flow obstructions and increase in flood heights (in adjacent properties) as a result of diminished flood plain storage capacity.
- When in-filling is employed as the means for elevating the lowest/ground floor of the structure, temporary flood storage retention structures must be constructed either onsite or within the sub catchment basin where the property belongs (size commensurate to the area occupied by the fill). In-fill should also not alter natural drainage ways and onsite drainage design should consider the estimated runoff volume to prevent increased flooding in adjacent properties.
- Protection of the fill from erosion and scour, and proper soil compaction should be employed.
- Electrical and communication cable runs and control switches, as much as practicable, should be placed two feet above the base flood elevation.
- For emergencies and rescue, escape openings should be accessible to occupants either through a small balcony above the flood elevation and/or roof openings.
- Encourage onsite water storage facilities. Water storage fixtures (or any buoyant structures) should be above the flood elevation or secured/anchored properly to resist buoyancy forces. Also, minimize exposed pipes (distribution/collection) to minimize damage from floating debris.
- Stairways should be wide, straight with large landings to allow easy relocation of heavy and bulky furniture.
- Minimum impervious surface area of the total lot area, but can be adjusted depending on capacities of proponents to employ on-site drainage network/s and flood/storm water retention to accommodate expected run-off.
- Building should have at least 50% of the Gross Floor Area above the estimated base flood elevation. Buildings are also encouraged to establish an attic space for emergency storage.
- **6. Other provisions -** pertains to provisions related to incentives/disincentives, additional requirements during locational clearance and building permit issuance, and property insurance requirements.
 - Proponent will be required to attend a flood hazard awareness seminar and will be part of the locational clearance application process.
 - Building owner will be required to purchase property insurance which covers flood associated damages.
 - Allowed uses or structures as indicated in base zone and covered by the EIS system shall apply for an Environmental Compliance Certificate, which should include an Engineering Geological and Geohazard Assessment Report)as part of the locational clearance and building permit application process.

• Provision incentives such as tax holidays for a specified period of time. Where savings can be used for employing hazard resistant building design/construction.

Risk Management Zones

Apart from the zoning and building/development regulations within hazard overlay zones, risk information can also be used to identify of Areas for Priority Action (APAs) which can be described as existing urban use areas within hazard prone areas (regardless of risk level) based on the results of the CDRA risk mapping. These APAs should be addressed within an acceptable period (i.e. 10 years or depending on the discretion of the LGU or through consultation with property owners) to ensure that the process of risk reduction is achieved within the planning period. These can be identified through the consolidation/overlying of all hazard specific-risk maps and the identification of areas. There are three possible scenarios/approaches where the establishment of risk management districts can be applied:

- 1. Identified risk areas where settlement can still be developed provided that the establishment of hazard mitigation infrastructure and compliance to hazard resistant building design and density standards are feasible to significantly reduce risks through gradual/incremental adaptation. These may also cover areas where current and **future capacities of property owners are not commensurate to the costs** required for significant risk mitigation which can be passed to another party. When dealing with areas where settlement development can still be pursued, declaring the area as a risk management district or APAs can be an option. Regulations can be applied to encourage existing property owners to participate in risk mitigation. The following options can be applied:
 - Requiring property owners to address risks within a given time frame (LGUs can adopt a 10 year period with consultation with owners):
 - Land acquisition or swapping where LGU offers other suitable areas in the locality. LGU assumes responsibility of the property for allocation to other suitable uses;
 - Relocation of existing households through resettlement LGU offers other suitable land areas for resettlement (through land banking) provides housing (at discounted rates) and provision of livelihood. LGU assumes responsibility of the area to be leased or sold to other interested proponents and revenues generated to be redirected to the establishment/maintenance of resettlement site/s;
 - Instituting local ordinances to increase property taxes and revenues derived from property owners outside the risk management districts where revenues can be redirected in area redevelopment;
- 2. Identified risk areas where settlement can still be developed provided that the establishment of hazard mitigation infrastructure and compliance to hazard resistant building design and density standards are feasible and **that current and future capacities of property owners are commensurate to the costs required for mitigation.** Regulations can be applied to encourage existing property owners to participate in risk mitigation. The following options can be applied:
 - Property owner is required to submit a structural engineering assessment to be conducted by a licensed structural engineer. The structural engineering assessment provides the recommendation and requirement for building retrofitting to which the property owner is given a period to implement retrofiting works;
 - Requiring property owners to address risks within a given time frame (LGUs can adopt a 10 year period with consultation with owners);
 - Tax holiday for a period of five years with the condition that property owners employ the required structural mitigation measures/retrofitting;

- When property owner does not employ retrofitting and if structure is still vulnerable to significant damage after five years upon the adoption of the zoning ordinance, a monetary penalty shall be imposed or property owners will be required to purchase insurance coverage annually;
- When property is significantly damaged within the 10 year period, property owner will be allowed to repair and rehabilitate the structure provided that it follows the minimum standards on hazard resistant design;
- If property owner fails to employ the minimum hazard resistant design standards, provisions in item 1 can be applied;
- Implementation of structural and non-structural risk mitigation measures where a portion of the cost/s will be shouldered by the property owners/beneficiaries;
- 3. Identified risk areas where the **only recourse is to relocate** existing properties/population due to possible hazards affecting the site and the establishment of mitigation measures to reduce risks are not feasible. The following options can be applied:
 - Mandatory relocation all affected households will be prioritized in resettlement projects;
 - Structures within identified areas to be relocated will be given three years to vacate the premises and or relocate to suitable areas;
 - When property owner fails to relocate within a specified number of years, structure will be subject to demolition proceedings.
 - When structure incurs significant damage during a hazard event, property owner will not be allowed to rehabilitate the existing facility or construct a new structure;

Cross-cutting Regulations

These pertain to regulations, related to climate change adaptation and mitigation, that can be imposed to residents and the business sector to address climate change impacts, contribute to water sufficiency, energy efficiency (minimizing green house gas emissions), promote the protection and stability of the natural environment, and other concerns. These regulations can be added to the performance standards section of the zoning ordinance. Providing incentive mechanisms for the adoption of green building design standards can also be incorporated in the ZO or in other support local ordinances. Some performance standards include:

- 1. Water Efficiency Regulations pertains to regulations imposed to property owners on the establishment of water storage/cisterns, and/or separate on-site piping system for non-potable water uses (flushing, gardening) to minimize potable water consumption for non-potable uses. Water for non-potable uses can be derived through rain-harvesting, and if feasible through centralized community based water treatment systems/facilities where storm water water can be treated for potable uses. Other innovations such as modern sanitary fixtures/systems (i.e. water less urinals, low flow toilets) can also be pursued.
- 2. **Sustainable Energy** pertains to provision of incentives (tax credits) to residences and business establishments to encourage the adoption of on-site renewable energy technologies such as photovoltaics, wind and solar water heating. These technologies can be encouraged to minimize dependence on energy derived from non-renewable and highly pollutive energy sources. Areas can also adopt off-grid, small scale and community based renewable energy technologies (if feasible). This may also pertain to building design regulations which reduced energy consumption for lighting and cooling through proper architectural design standards by maximizing ambient daylight and minimizing indoor temperature through solar orientation, proper ventilation, passive cooling, insulation and heat reflective roofing.
- 3. **Green Spaces** pertains to regulations in the establishment and allocation for green spaces for the purposes of GHG sequestration, minimizing ambient temperature, improved air quality, and improve aesthetics. These can be done by prescribing a minimum green space ratio per lot (i.e. 30-50% of the total

lot area to be devoted for green spaces) such as landscaping, residential tree canopy and/or vegetative green roofs.

Mandaluyong City enacted the 2014 Green Building Regulations (Ordinance No. 535, series of 2014) and its implement rules and regulations to contribute to the global efforts in reducing green house gas emission and minimizing impacts of buildings on health and the environment⁴. It provides a good example of relevant provisions in support climate change adaptation and mitigation. It covers standards on energy efficiency, water efficiency, materials and waste management, site sustainability and indoor environmental quality, including incentives in the form of increased floor area ratio and tax discounts. Certain provisions can be adopted by other LGUs and incorporated in the ZO as separate sections.

Implementation of the CLUP and ZO

This phase is an integral part in implementing the CLUP and enforcing the ZO towards the realization of the identified vision, goals and objectives. With emphasis on CCA-DRRM, the following areas should be taken into consideration:

Institutional capacity and capability building for land use and development planning and monitoring - entails an assessment of current capacities of the LGU and concerned departments in sustaining CCA-DRRM efforts, and instituting changes to enhance the institutional structure, systems and procedures for continuous/sustained risk reduction and management and climate change adaptation related planning; information management; program and project development and management; resource generation/fiscal management; investment programming; and monitoring and evaluation. This may also entail the establishment and maintaining of necessary geographic and information management systems (i.e. Geographic Information System, Building Information and Management System, Community Based Monitoring System).

Institutional capacity and capability building for zoning enforcement - entails an assessment of current capacities and capabilities for effective enforcement of zoning regulations (including building designs), instituting changes in the systems/procedures in the review, approval and issuance of locational clearances (zoning department/office) and building permits (engineering department); continuous inspection/compliance monitoring, cadastral mapping and field surveying. This also involves feedback mechanisms to allow future adjustments/revisions to further improve zone regulations.

Revenue Generation - increase locally generated revenues to support the CCA-DRRM agenda. This may cover the imposition of special levies¹⁵ to cover costs for CCA-DRRM related projects and activities that directly benefits property owners (i.e. flood control works, establishment of roads) where LGU can recover costs not exceeding 60% of the actual costs of public projects and reasonable rates to be fixed commensurate to service rendered¹⁶. Generate revenues from the special education fund (1% of the real property tax), which can be used for retrofitting educational related facilities/structures, and collecting idle land taxes (2% per annum based on the prevailing assessed value of the property) to encourage the use of agricultural lands and/ or fund adaptation measures for agriculture (establishment of improved irrigation, water impoundment facilities or other initiatives in support of climate resilient agricultural production). LGUs can also institute changes to improve tax collection efficiency and enforce necessary penalties on tax delinquency.

Financing DRR-CCA initiatives - LGUs can utilize 70 percent of the total calamity fund for risk-reduction measures and 30 percent to quick response activities. These can be a source of funds to implement identified

¹⁵ Local Government Code of the Philippines, Book II, Chapter V, Section 240, Republic Act 7160, 1991

¹⁶ HLURB, CLUP Guidebook: A Guide to Comprehensive Land Use Plan Preparation, 2013
HLURB-CCC-UNDP-AusAid | PROJECT CLIMATE TWIN PHOENIX

risk reduction projects and programs in the CLUP. LGUs can also tap into the People Survival Fund, under Republic Act No. 10174, to fund adaptation programs and projects subject to review and approval by the People's Survival Fund board. Also, LGUs can access climate financing offered by International entities in the form of grants and/or loans.

Strengthening LGU-NGO-PO Linkages - Encourage participatory planning, program and project development and implementation for CCA-DRRM endeavors by involving Non-Government Organizations, Peoples Organizations, Community Groups, and Civil Society to identify socially acceptable adaptation and mitigation measures.

Interfacing with other local plans - Ensuring consistency of short to medium term local plans such as the Comprehensive Development Plan, Executive and Legislative Agenda, Local Development and Annual Investment Plans are consistent with the Comprehensive Land Use Plan. Also, ensure consistency with higher level plans like PDPFP, RPFP, and NPFP.

Synergy - Establishing and strengthening inter-LGU linkages and cooperation for the reduction and management of common/shared risks. It also includes strengthening ties with concerned provincial level governments, regional line agencies and other entities (i.e. Indigenous People) to ensure policies, programs and projects related to land development and natural resources management are consistent.

Monitoring and evaluation

Monitoring and evaluation takes off from the CCA-DRRM related success indicators and targets articulated in the goals and objectives setting step of the CLUP formulation process. The purpose of monitoring and evaluation is to ensure that necessary systems/mechanism/procedures are in place that will allow the consistent and systematic monitoring of CCA-DRRM interventions and its intended/desired results, measure trends and evaluate its benefits and impacts. It shall serve as the feedback mechanism as a basis for revising policy interventions so that alternative risk reduction and management measures can be identified. A sample monitoring and evaluation matrix can be prepared as basis for the detailing of methodologies/procedures.

Table 4.22 Sample Monitoring and Evaluation Indicators

Sample/Recommended Success Indicators/Targets Spatial DRR- CCA	Responsible Departments/Offices	Brief Description/Parameters for Monitoring
 Incremental relocation of 445 informal settler families in considered highly at risk to floods and/or vulnerable to sea level-rise and storm surges 	Municipal Social Welfare and Development - Municipal Planning and Development Office	Annual number of relocated informal settler families
 Increase area allocation for new residential areas to accommodate 6,420 households 	Municipal Planning and Development Office	Annual number of housing units constructed and number of household beneficiaries
 Reduction in number of families dependent on post disaster financing/assistance 	Municipal Social Welfare and Development	Annual data on the number of households/ residents who received financial aid and relief assistance. Data aggregation shall be at the Purok/ Zone level.
Reduction in amount spent for post disaster financing/assistance	Municipal Budget Office - Municipal Disaster Risk Reduction and Management Office	Annual data on the cost incurred by the local government for financial assistance; and disaster response and relief assistance. Data shall be aggregated at the purok/zone level

Table 4.22 Sample Monitoring and Evaluation Indicators

Responsible Departments/Offices	Brief Description/Parameters for Monitoring
Municipal Disaster Risk Reduction and Management Office - Municipal Engineering Office/Municipal Building Official	Standardized annual data on the number of deaths due to natural hazards Standardized annual data on the number of
	partially and totally damaged structures to natural hazards. Aggregated by building type (residential, commercial, institutional, etc) and by purok.
Municipal Building Official/Engineering Department	Establish an extensive geo-referenced building database on important parameters (i.e. building type, wall and roof materials, construction cost/
	assessed value, insurance coverage) which can be incorporated in the annual payment of real property taxes.
	Incorporate structural engineering assessment and evaluation requirement as part of the real property tax payment process.
	Annual monitoring of the number of building owners who employed retrofitting
	Annual monitoring on the number of structures conforming to hazard resistant design Annual monitoring of existing and new buildings
	constructed in identified no-build zones Annual monitoring of existing and new building
Municipal Planning and Davolonment	structures with insurance coverage 5 year interval trending on the number/percentage
Office	population with life insurance coverage aggregated by household (CBMS)
	5 year interval trending on the number/percentage population above the Poverty Index aggregated by household (CBMS)
	5 year interval trending on the household income aggregated by household (CBMS)
	5 year interval trending on the unemployment rate (CBMS)
Municipal Planning and Development Office - Business licensing	2 year interval trending on the number of new jobs generated aggregated by barangay by type of industry/profession
	Municipal Disaster Risk Reduction and Management Office - Municipal Engineering Office/Municipal Building Official Municipal Building Official/Engineering Department Municipal Planning and Development Office Municipal Planning and Development

TMENITAL CHIDELIA	IEC ON MANINICTEEANAINIC	CLIMANTE AND DICACTED	DICKC IN THE C	ON ADDELLENICIVE 1 A	AND LICE DLAN

Glossary of Terms

Presented below are some basic DRR and CCA terminologies and concepts relevant to mainstreaming disaster risk assessment into land use planning. The definitions are mostly derived from the UNISDR, IPCC, Philippine laws on DRR-CCA and other local references

Acceptable risk

The level of potential losses that a society or community considers acceptable given existing social, economic, political, cultural, technical and environmental conditions (UNISDR, 2009).

Adaptation

In human systems, the process of adjustment to actual or expected climate and its effects, in order to moderate harm or exploit beneficial opportunities. In natural systems, the process of adjustment to actual climate and its effects; human intervention may facilitate adjustment to expected climate (IPCC 2012).

The adjustment in natural or human systems in response to actual or expected climatic stimuli or their effects, which moderates harm or exploits beneficial opportunities (CC Act, 2009).

Adaptation assessment

The practice of identifying options to adapt to climate change and evaluating them in terms of criteria such as availability, benefits, costs, effectiveness, efficiency, and feasibility (IPCC, 2012)

Adaptive Capacity

The ability of ecological, social or economic systems to adjust to climate change including climate variability and extremes, to moderate or offset potential damages and to take advantage of associated opportunities with changes in climate or to cope with the consequences thereof (CC Act. 2009).

The combination of the strengths, attributes, and resources available to an individual, community, society, or organization that can be used to prepare for and undertake actions to reduce adverse impacts, moderate harm, or exploit beneficial opportunities (IPCC, 2012).

Capacity

a combination of all strengths and resources available within a community, society or organization that can reduce the level of risk, or effects of a disaster. Capacity may include infrastructure and physical means, institutions, societal coping abilities, as well as human knowledge, skills and collective attributes such as social relationships, leadership and management. Capacity may also be described as capability (PDRRM Act 2010).

Capacity Development

The process by which people, organizations and society systematically stimulate and develop their capacities over time to achieve social and economic goals, including through improvement of knowledge, skills, systems, and institutions (UNISDR, 2009).

Climate Change

A change in the state of the climate that can be identified (e.g., by using statistical tests) by changes in the mean and/or the variability of its properties and that persists for an extended period, typically decades or longer. Climate change may be due to natural internal processes or external forcings, or to persistent anthropogenic changes in the composition of the atmosphere or in land use (IPCC, 2012).

A Change in climate that can be identified by changes in the mean and/or variability of its properties and that persists for an extended period typically decades or longer, whether due to natural variability or as a result of human activity(CC Act, 2009).

A change of climate which is attributed directly or indirectly to human activity that alters the composition of the global atmosphere and which is in addition to natural climate variability observed over comparable time periods (UNFCC, 1992)

Climate extreme (extreme weather or climate event)

The occurrence of a value of a weather or climate variable above (or below) a threshold value near the upper (or lower) ends of the range of observed values of the variable. For simplicity, both extreme weather events and extreme climate events are referred to collectively as 'climate extremes.'

Climate Risk

Climate Risk refers to the product of climate and related hazards working over the vulnerability of human and natural ecosystems (CC Act, 2009).

Climate Variability

The variations in the average state and in other statistics of the climate on all temporal and spatial scales beyond that of individual weather events (CC Act, 2009).

Climate variability refers to variations in the mean state and other statistics (such as standard deviations, the occurrence of extremes, etc.) of the climate at all spatial and temporal scales beyond that of individual weather events. Variability may be due to natural internal processes within the climate system (internal variability), or to variations in natural or anthropogenic external forcing (external variability). See also Climate change (IPCC, 2012).

Coping capacity

The ability of people, organizations, and systems, using available skills, resources, and opportunities, to address, manage, and overcome adverse conditions (IPCC, 2012).

The ability of people, organizations and systems, using available skills and resources, to face and manage adverse conditions, emergencies or disasters (UNISDR, 2009).

Contingency Planning

A management process that analyzes specific potential events or emerging situations that might threaten society or the environment and establishes arrangements in advance to enable timely, effective and appropriate responses to such events and situations (PDRRM Act, 2010).

Disaster

A serious disruption of the functioning of a community or a society involving widespread human, material, economic or environmental losses and impacts, which exceeds the ability of the affected community or society to cope using its own resources (UN-ISDR, 2009).

Severe alterations in the normal functioning of a community or a society due to hazardous physical events interacting with vulnerable social conditions, leading to widespread adverse human, material, economic, or environmental effects that require immediate emergency response to satisfy critical human needs and that may require external support for recovery (IPCC, 2012).

A serious disruption of the functioning of a community or a society involving widespread human, material, economic or environmental losses and impacts, which exceeds the ability of the affected community or society to cope using its own resources. Disasters are often described as a result of the combination of: the exposure to a hazard; the conditions of vulnerability that are present; and insufficient capacity or measures to reduce or cope with the potential negative consequences, Disaster impacts may include loss of life, injury, disease and other negative effects on human, physical, mental and social well-being, together with damage to property, destruction of assets, loss of services, Social and economic disruption and environmental degradation (PDRRM Act, 2010).

Disaster Prevention

The outright avoidance of adverse impacts of hazards and related disasters. It expresses the concept and intention to completely avoid potential adverse impacts through action taken in advance such as construction of dams or embankments that eliminate flood risks, land-use regulations that do not permit any settlement in high-risk ares, and seismic engineering designs that ensure the survival and function of a critical building in any likely earthquake (PDRRM Act, 2010)

Disaster Response

The provision of emergency services and public assistance during or immediately after a disaster in order to save lives, reduce health impacts, ensure public safety and meet the basic subsistence needs of the people affected. Disaster response is predominantly focused on immediate and short-term needs and is sometimes called "disaster relief'(PDRRM Act, 2010).

Disaster Risk

The potential disaster losses, in lives, health status, livelihoods, assets and services, which could occur to a particular community or a society over some specified future time period (UNISDR. 2009).

The likelihood over a specified time period of severe alterations in the normal functioning of a community or a society due to hazardous physical events interacting with vulnerable social conditions, leading to widespread adverse human, material, economic, or environmental effects that require immediate emergency response to satisfy critical human needs and that may require external support for recovery (IPCC, 2012).

Disaster Risk Management

The systematic process of using administrative directives, organizations, and operational skills and capacities to implement strategies, policies and improved coping capacities in order to lessen the adverse impacts of hazards and the possibility of disaster (UNISDR, 2009).

Processes for designing, implementing, and evaluating strategies, policies, and measures to improve the understanding of disaster risk, foster disaster risk reduction and transfer, and promote continuous improvement in disaster preparedness, response, and recovery practices, with the explicit purpose of increasing human security, well-being, quality of life, and sustainable development(IPCC, 2012).

Disaster Risk Reduction

The concept and practice of reducing disaster risks through systematic efforts to analyze and manage the causal factors of disasters, including through reduced exposure to hazards, lessened vulnerability of people and property, wise management of land and the environment, and improved preparedness for adverse events (UNISDR, 2009).

Denotes both a policy goal or objective, and the strategic and instrumental measures employed for anticipating future disaster risk; reducing existing exposure, hazard, or vulnerability; and improving resilience (IPCC, 2012)

Disaster Risk Reduction and Management

The systematic process of using administrative directives, organizations, and operational skills and capacities to implement strategies, policies and improved coping capacities in order to lessen the adverse impacts of hazards and the possibility of disaster. Prospective disaster risk reduction and management refers to risk reduction and management activities that address and seek to avoid the development of new or increased disaster risks, especially if risk reduction policies are not put in place (PDRRM Act, 2010).

Disaster Mitigation

The lessening or limitation of the adverse impacts of hazards and related disasters. Mitigation measures encompass engineering techniques and hazard-resistant construction as well as improved environmental policies and public awareness (PDRRM Act. 2010).

Disaster Preparedness

The knowledge and capacities developed by governments, professional response and recovery organizations, communities and individuals to effectively anticipate, respond to, and recover from, the Impacts of likely, imminent or current hazard events or conditions. Preparedness action is carried out within the context of disaster risk reduction and management and aims to build the capacities needed to efficiently manage all types of emergencies and achieve orderly transitions from response to sustained recovery. Preparedness is based on a sound analysis of disaster risk and good linkages with early warning systems, and includes such activities as contingency planning, stockpiling of equipment and supplies, the development of arrangements for coordination, evacuation and public information, and associated training and field exercises. These must be supported by formal institutional, legal and budgetary capacities (PDRRM Act, 2010).

Exposure

The presence of people; livelihoods; environmental services and resources; infrastructure; or economic, social, or cultural assets in places that could be adversely affected (IPCC, 2012).

People, property, systems, or other elements present in hazard zones that are thereby subject to potential losses(UNISDR, 2009).

The degree to which the elements at risk are likely to experience hazard events of different magnitudes(PDRRM Act, 2010).

Hazard

A dangerous phenomenon, substance, human activity or condition that may cause loss of life, injury or other health impacts, property damage, loss of livelihoods and services, social and economic disruption, or environmental damage (UNISDR, 2009).

The potential occurrence of a natural or human-induced physical event that may cause loss of life, injury, or other health impacts, as well as damage and loss to property, infrastructure, livelihoods, service provision, and environmental resources (IPCC, 2012).

A threatening event, or the probability of occurrence of a potentially damaging phenomenon, within a given time period and area that may cause loss of life or injury, property damage, social and economic disruption or environmental degradation or a combination of these. (NEDA, 2008)

Mainstreaming

The integration of policies and measures that address climate change into development planning and sectoral decision-making (CC Act, 2009).

Land-Use Planning

Land use planning refers to the rational and judicious approach of allocating available land resources to different land using activities, (e.g. agricultural, residential, industrial) and for different functions consistent with the overall development vision/goal of a particular locality. It entails the detailed process of determining the location and area of land required for the implementation of social and economic development, policies, plans, programs and projects. It is based on consideration of physical planning standards, development vision, goals and objective, analysis of actual and potential physical conditions of land and development constraints and opportunities (HLURB, 2006).

The process undertaken by public authorities to identify, evaluate and decide on different options for the use of land,

including consideration of long-term economic, social and environmental objectives and the implications for different communities and interest groups, and the subsequent formulation and promulgation of plans that describe the permitted or acceptable uses (UNISDR, 2009).

Mitigation

Structural and non-structural measures undertaken to limit the adverse impact of natural hazards, environmental degradation, and technological hazards and to ensure the ability of at-risk communities to address vulnerabilities aimed at minimizing the impact of disasters. Such measures include, but are not limited to, hazard-resistant construction and engineering works, the formulation and implementation of plans, programs, projects and activities, awareness raising, knowledge management, policies on land-use and resource management, as well as the enforcement of comprehensive land-use planning, building and safety standards, and legislation (PDRRM Act, 2010).

In the context of climate change, refers to human intervention to address anthropogenic emissions by sources and removals by sinks of all GHG, including ozone- depleting substances and their substitutes (IPCC, 2012).

In the context of disaster and disaster risk, The lessening of the potential adverse impacts of physical hazards (including those that are human-induced) through actions that reduce hazard, exposure, and vulnerability (IPCC, 2012).

Preparedness

The knowledge and capacities developed by governments, professional response and recovery organizations, communities and individuals to effectively anticipate, respond to, and recover from, the impacts of likely, imminent or current hazard events or conditions (UNISDR, 2009).

Pre-disaster actions and measures being undertaken within the context of disaster risk reduction and management and are based on sound risk analysis as well as pre-disaster activities to avert or minimize loss of life and property such as, but not Ilmited to, community organizing, training, planning, equipping, stockpiling, hazard mapping, insuring of assets, and public information and education initiatives. This also includes the development enhancement of an overall preparedness strategy, policy, institutional structure, warning and forecasting capabilities, and plans that define measures geared to help at-risk communities safeguard their lives and assets by being alert to hazards and taking appropriate action in the face of an Imminent threat or an actual disaster (PDRRM Act, 2010).

Retrofitting

Reinforcement or upgrading of existing structures to become more resistant and resilient to the damaging effects of hazards (UNISDR, 2009).

Risk

The combination of the probability of an event and its negative consequences (UNISDR, 2009).

Risk is the expected losses (of lives, persons injured, property damaged and economic activity disrupted) due to a particular hazard for a given area and reference period. _e unit of measure of risk could be number of fatality or value of damaged property. Risk is mathematically expressed as: Risk = Hazard x Elements at risk x Vulnerability (NEDA, 2007)

Risk Assessment

A methodology to determine the nature and extent of risk by analyzing potential hazards and evaluating existing conditions of vulnerability that together could potentially harm exposed people, property, services, livelihoods and the environment on which they depend (UNISDR, 2009).

A methodology to determine the nature and extent of risk by analyzing potential hazards and evaluating existing conditions of vulnerability that together could potentially harm exposed people, property, services, livelihood and the environment on which they depend. Risk assessments with associated risk mapping include: a review of the technical characteristics of hazards such as their location, intensity, frequency and probability; the analysis of exposure and vulnerability including the physical, social, health, economic and environmental dimensions; and the evaluation of the effectiveness of prevailing and alternative coping capacities in respect to likely risk scenarios (PDRRMC Act, 2010).

Risk transfer

The process of formally or informally shifting the financial consequences of particular risks from one party to another whereby a household, community, enterprise, or state authority will obtain resources from the other party after a disaster occurs, in exchange for ongoing or compensatory social or financial benefits provided to that other party (UNISDR, 2012).

Resilience

The ability of a system and its component parts to anticipate, absorb, accommodate, or recover from the effects of a hazardous event in a timely and efficient manner, including through ensuring the preservation, restoration, or improvement of its essential basic structures and functions (IPCC, 2012).

The ability of a system, community or society exposed to hazards to resist, absorb, accommodate to and recover from the effects of a hazard in a timely and efficient manner, including through the preservation and restoration of its essential basic structures and functions (UNISDR, 2009).

Response

Any concerted effort by two (2) or more agencies, public or private, to provide assistance or intervention during or immediately after a disaster to meet the life preservation and basic subsistence needs of those people affected and in the restoration of essential public activities and facilities (PDRRM Act. 2010).

Post-Disaster Recovery

The restoration and improvement where appropriate, of facilities, livelihood and living conditions.of disaster-affected communities, including efforts to reduce disaster risk factors, in accordance with the principles of "build back better" (PDRRM Act, 2010).

Prevention

The outright avoidance of adverse impacts of hazards and related disasters (UNISDR, 2009).

Recovery

The restoration, and improvement where appropriate, of facilities, livelihoods and living conditions of disaster-affected communities, including efforts to reduce disaster risk factors (UNISDR, 2009).

Structural and non-structural measures

Structural measures: Any physical construction to reduce or avoid possible impacts of hazards, or application of engineering techniques to achieve hazard- resistance and resilience in structures or systems;

Non-structural measures: Any measure not involving physical construction that uses knowledge, practice or agreement to reduce risks and impacts, in particular through policies and laws, public awareness raising, training and education (UNISDR, 2009).

Vulnerability

The characteristics and circumstances of a community, system or asset that make it susceptible to the damaging effects of a hazard (UNISDR, 2009).

The propensity or predisposition to be adversely affected (IPCC, 2012).

The characteristics and circumstances of a community, system or asset that make it susceptible to the damaging effects of a hazard. Vulnerability may arise from various physical, social, economic, and environmental factors such as poor design and construction of buildings, inadequate protection of assets, lack of public information and awareness, limited official recognition of risks (PDRRM Act. 2010).

The degree to which a system is susceptible to, or unable to cope with, adverse effects of climate change, including climate variability and extremes. Vulnerability is a function of the character, magnitude, and rate of climate change and variation to which a system is exposed, its sensitivity, and its adaptive capacity (CC Act, 2009).

Vulnerability Assessment

Systematic examination of impacts of climate change and disasters on natural and socio-economic systems (IPCC 2007).

Vulnerability assessments examine the underlying socioeconomic, institutional, and, to a lesser extent, political and cultural factors, that

determine how people cope with climate hazards.

Vulnerability assessments make use of indicators that can help identify and target vulnerable regions, sectors or populations, raise awareness, and be part of a monitoring strategy (Downing et. al. 2001).

SUPPLEMENTAL GUIDELINES ON MAINSTREAMING CLIMATE AND DISASTER RISKS IN THE COMPREHE	NSIVE LAND USE PLAN
Annex	: Fundamental Concepts

The concept of risk and vulnerability in the context of Disaster Risk Reduction and Climate Change Adaptation

The development of the methodology for climate and disaster risk assessment and climate change vulnerability assessment requires a better understanding of concepts developed by two communities of practice: disaster risk and climate change.

Climate Change

Climate change refers to a change in the state of the climate that can be identified (e.g., by using statistical tests) by changes in the mean and/or the variability of its properties, and that persists for an extended period, typically decades or longer. Climate change may be due to natural internal processes or external forcings such as modulations of the solar cycles, volcanic eruptions and persistent anthropogenic changes in the composition of the atmosphere or in land use¹⁷. The most recent findings by the Intergovernmental Panel on Climate Change (IPCC) showed that the global temperature has increased by an average of 0.85 degrees over the period 1880 to 2012¹⁸. The increase in global mean temperatures are attributed to the increase atmospheric concentration of greenhouse gases due to human activity since 1750¹⁹. A changing climate could manifest in the changes in seasonal temperature and rainfall patterns; frequency and intensity of extreme precipitation events, intensity and duration of droughts, increase in tropical cyclone activity; and sea level rise as a result of the glacial mass loss and thermal expansion of oceans. Climate models used to develop climate change scenarios are run using different forcings such as increasing greenhouse gas and aerosols atmospheric concentrations. These emission scenarios known as the SRES (Special Report on Emission Scenarios) developed by the Intergovernmental Panel on Climate Change (IPCC) give the range of plausible future climate given the possible demographic, societal, economic and technological storylines (Refer to Table A1. and Figure A1)

Table A1. The four SRES scenarios developed by the Intergovernmental Panel on Climate Change (IPCC)

Scenario Family	Development Pathway		
	Very rapid economic growth, a global population that peaks in	A1FI - Reliance on fossil intensive;	
A1	mid-century and rapid introduction of new and more efficient technology. A1 is further subdivided into three groups that describe alternative directions of technological change	A1T - Reliance on non-fossil fuels;	
		A1B - Balance across all fuel sources	
A2	A very heterogeneous world with high population growth, slow economic development and slow technological change.		
B1	Describes a convergent world, with the same global population as A1, but with more rapid changes in economic structures toward a service and information economy		
B2	a world with intermediate population and economic growth, emphasizing local solutions to economic, social, and environmental sustainability.		

Source: IPCC, 2007: Climate Change 2007: Synthesis Report. Contribution of Working Groups I, II and III to the Fourth Assessment Report of the Intergovernmental Panel on Climate Change [Core Writing Team, Pachauri, R.K and Reisinger, A. (eds.)]. IPCC, Geneva, Switzerland, p. 44

¹⁷ IPCC, 2013: Climate Change 2013: The Physical Science Basis. Contribution of Working Group I to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change. Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA, Annex III, p 1450.

¹⁸ Ibid, p. 5

¹⁹ bid, p. 11

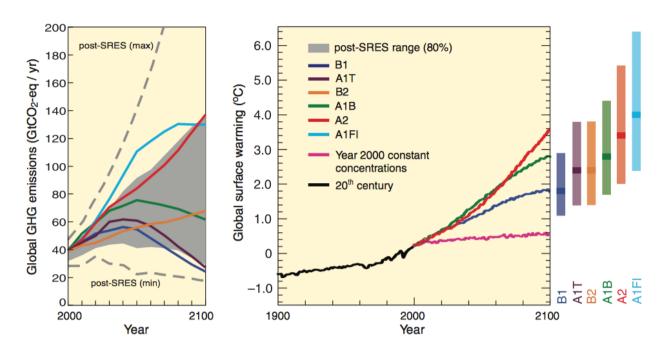


Figure A1. Scenarios for GHG emissions from 2000 to 2100 and projections of surface temperatures

Source: Climate Change 2007: Synthesis Report, IPCC, 2007, p.7

Climate Change in the Philippines

The Philippine Atmospheric, Geophysical and Astronomical Services Administration (PAGASA) released the official Climate Projections in the Philippines on February 2011. It contains information on the observed and future climate change scenarios, at the provincial level, based on the latest empirical and scientific studies and understanding. It was intended to provide decision makers the information to support development planning and anticipate the potential changes in extreme and seasonal climate parameters.

Using the Providing Regional Climates for Impact Studies (PRECIS) and using the B2 (low range emission) A1B (medium range emission) and A2 (high emission) scenarios, with baseline period from 1971-2000, the following trends were established to project the future climate model in two time frames; 2020 and 2050²⁰:

- Seasonal rainfall change generally, there is reduction in rainfall in most parts of the country during the summer (MAM) season. However, rainfall increase is likely during the southwest monsoon (JJA) season until the transition (SON) season in most areas of Luzon and Visayas, and also, during the northeast monsoon (DJF) season, particularly, in provinces/areas characterized as Type II climate in 2020 and 2050. There is however, generally decreasing trend in rainfall in Mindanao, especially by 2050.
- Seasonal temperature change Mean temperatures in all areas in the Philippines are expected to rise by 0.9°C to 1.1°C in 2020 and by 1.8 °C to 2.2 °C in 2050. Likewise, all seasonal mean temperatures will also have increases in these time slices; and these increases during the four seasons are guite consistent in all parts of the country. Largest temperature increase is projected during the summer (MAM) season;
- Frequency of extreme rainfall events heavy daily rainfall will continue to become more frequent, extreme rainfall is projected to increase in Luzon and Visayas only;

²⁰ Philippine Atmospheric, Geophysical and Astronomical Services Administration (PAGASA), Climate Change in the Philippines, February 2011, pp

- Frequency of days with temperatures exceeding 35°C hot temperatures will continue to become more frequent in the future;
- Frequency of dry days or days with rainfall less than 2.5mm Number of dry days is expected to increase in all parts of the country in 2020 and 2050;

The Concept of Risk

Risk is defined as the combination of the probability of an event and its negative consequences²¹. Risk is the expected losses (of lives, persons injured, property damaged and economic activity disrupted) due to a particular hazard for a given area and reference period. The unit of measure of risk could be number of fatality or value of damaged property. Risk is a function of the probability of occurrence of hazards, elements exposed and vulnerability of elements exposed to the hazards, expressed as:

$$f(Risk) = Hazard, Exposure, Vulnerability$$

Hazard is a potentially damaging physical event, phenomenon or human activity that may cause the loss of life or injury, property damage, social and economic disruption or environmental degradation. A hazard can be geological, such as an earthquake or volcanic eruption; it can be meteorological, such as flood and rain-induced landslide.

Exposure refers to elements such as people, buildings, infrastructure, the economy and natural environment, that are subject to the impact of specific hazard.

Vulnerability refers to qualities of the element exposed to withstand the impact of a hazard event; refers to the characteristics (i.e. building wall materials, age of the building) of an element exposed to a hazard that contributes to the capacity of the exposed elements to resist, cope with, withstand, and recover from the impact of natural hazard.

Following the H-E-V risk approach, probabilistic risk can also be expressed as:

f(Risk) = Probability, Consequence

Wherein hazard is expressed as the probability of occurrence of the hazard or the estimated recurrence expressed as a return period (1/100 years or 1% chance of occurring in any given year) and consequence which is the interplay of the expected magnitude of the hazard, the extent of exposure, and the vulnerability conditions of the exposed elements. The other end of the spectrum is a deterministic risk approach wherein an assumption is adopted that there is certainty that a hazard event will happen and the damage and losses associated to it.

²¹ United Nations International Strategy for Disaster Reduction, UNISDR Terminology on Disaster Risk Reduction, 2009.
HLURB-CCC-UNDP-AusAid | PROJECT CLIMATE TWIN PHOENIX

Table A2. Comparative Matrix of Application of Concept of Risk

Risk and Components	Concept	Mainstreaming Guidelines on Sub- national planning	Reference Manual on Integrating DRR and CCA into the CLUP
Risk	Annual loss of lives, annual damage to properties	Annual loss of lives, annual damage to properties	Risk is measured qualitatively based on the indicative likelihood of occurrence score and a subjective rating/assessment on on the severity of consequence based on the existing/baseline vulnerability attributes of exposed elements.
Hazard	A hazard's destructive potential or degree of hazard is a function of the magnitude, duration, location and timing of the event. Basic data would be the probability of occurrence. Probabilistic data must be historically established. This is usually reflected in the hazard maps.	Hazard maps do not reflect the probability of occurrence or return period of hazard events. Instead, susceptibility or proneness defined as highly susceptible area (HSA), moderately susceptible area (MSA), and low susceptible area (LSA) are reflected in the maps. Each of these areas of susceptibility were assigned return periods.	Flood modeling maps were generated for Surigao City for a 2, 5, 10, 25, and 50 year rainfall. The Rainfall Intensity Duration Frequency (RIDF) curves for Surigao City that were utilized in flood modeling and was based on the PAGASA observed historical daily rainfall data.
	usuany renected in the nazard maps.	retuiii perious.	The resulting maps depicted the estimated flood extent and heights along the Surigao River for the different scenarios (return period of rainfall).
			Other hazard maps used in the pilot areas were sourced from mandated agencies
Exposure	Ideally a probability density function for population exposure which takes into account nature of events, and spatial and temporal dimensions are used. For economic assets, detailed measures of the extent and quality of infrastructure and the economic value of the exposed land and resources are used.	Replacement value of structures (based on building permits data). Replacement value based on the cost of crops production from the Department of Agriculture. The barangay population count and the estimated barangay land area were used to compute for the estimated population density which was then used to estimate the affected persons based on the extent/area of the hazard per susceptibility class as a proxy variable for exposure.	Exposure was determined using map overlays of hazards and elements at risk covering population, built-up areas, agriculture, transportation, and critical point facilities (i.e. schools, government buildings, power, water and communication related facilities). Exposure per type are represented either as area, number of facilities, and replacement value.
Vulnerability	Vulnerability of elements exposed refers to their intrinsic characteristics that allow them to be damaged or destroyed. The weakness of physical and social systems is usually defined in terms of fragility curves, in which the weaknesses are quantified as a function of hazard severity.	Owing to data limitations, historical loss rates were used to estimate the loss expected when particular populations or economic assets are exposed to hazards. Vulnerability is represented by the factor of fatality and factor of damage (built-up areas and agriculture) and is referred to as "macro vulnerability". A "micro vulnerability" assessment was	Vulnerability analysis is based on the existing/baseline attributes of the exposed elements. These attributes were described and summarized per barangay which were considered (along with the extent/number of exposed elements) in assigning the severity of consequence (degree of damage).
		undertaken in the identified priority planning areas or the high risk areas in which the characteristics of the population, infrastructure and services, economy, other assets were evaluated and together with the coping capacity of the people and the locality, were considered in the design of appropriate risk reduction measures.	

Reference Manual on Integrating Disaster Risk Reduction and Climate Change Adaptation in the Comprehensive Land Use Plan Report, NEDA-UNDP-HLURB, 2011

Disaster

Disaster is defined as a serious disruption of the functioning of a society, causing widespread human, material or environmental losses which exceed the ability of affected society to cope using only its own resources. Natural disaster would be a disaster caused by nature or natural causes²².

The NDRRMC (through the NDCC Memorandum Order No 4. series of 1998, items 4a-b, items a. to b.) criteria for declaring a state of calamity provides the measurable criteria or thresholds which can be used as proxy indicators for disasters. It covers the minimum percentage of severely affected population, minimum percentage damage to means of livelihood, minimum duration of disruption in the flow of transport and commerce (i.e roads and bridges), minimum percentage damage to agriculture based products, and duration of disruption of lifeline facilities (i.e electricity, potable water systems, communication).

Table A3. Thresholds for declaring a state of calamity

Element	Criteria for declaring a state of calamity
Population	At least 20% of the population are affected and in need of immediate assistance.
Dwelling units	At least 20% of dwelling units have been destroyed
Means of livelihood	A great number or at least 40% of the means of livelihood such as bancas, fishing boats, vehicles and the like are destroyed;
	Widespread destruction of fishponds, crops, poultry, and livestock, and other agricultural products
Lifelines	Disruption of lifelines such as electricity, potable water system, transport system communication system and other related systems which can not be restored within one (1) week, except for highly urbanized areas where restoration of the above facilities cannot be made within twenty-four (24) hours.
¹ NDCC Memorandum Order No 4. series of 1998, items 4a-b, items a. to b	

Disaster Risk Assessment

Disaster risk assessment is a methodology to determine the nature and extent of risk by analyzing potential hazards and evaluating existing conditions of vulnerability that together could potentially harm exposed people, property, services, livelihoods and the environment to which they depend. Risk assessments and associated risk mapping include: a review of the technical characteristics of hazards such as their location, intensity, frequency and probability; the analysis of exposure and vulnerability including the physical, social, health and environmental dimensions; and the evaluation of the effectiveness of prevailing and alternative coping capacities in respect to likely risk scenarios. The series of activities is sometimes known as a risk analysis (UNISDR: 2009). In 2009, the National Economic and Development Authority in partnership with

²²United Nations International Strategy for Disaster Reduction, UNISDR Terminology on Disaster Risk Reduction, 2009.

UNDP and European Commission Humanitarian Office (ECHO) developed the Guidelines on Mainstreaming Disaster Risk Reduction in Subnational Development and Land Use/Physical Planning where disaster risk assessment was introduced as a process for establishing areas at risk to natural hazards and the planning implications. A quantitative risk assessment methodology was used which adopted several assumptions due to the availability and quality of data.

Disaster Risk Reduction and Management

The systematic process of using administrative directives, organizations, and operational skills and capacities to implement strategies, policies and improved coping capacities in order to lessen the adverse impacts of hazards and the possibility of disaster. prospective disaster risk reduction and management refers to risk reduction and management activities that address and seek to avoid the development of new or increased disaster risks, especially if risk reduction policies are not put in place ²³.

Disaster Risk Reduction

The systematic efforts to analyze and manage the causal factors of disasters, including through reduced exposure to hazards, lessened vulnerability of people and property, wise management of land and the environment, and improved preparedness for adverse events (ADPC).

The Concept of Vulnerability

Using the IPCC framework, vulnerability is defined as the degree to which a system is susceptible to, or unable to cope with, adverse effects of climate change, including climate variability and extremes. Vulnerability is a function of the character, magnitude, and rate of climate variation to which a system is exposed, its sensitivity, and its adaptive capacity²⁴.

f(Vulnerability) = Exposure, Sensitivity, Adaptive Capacity

where:

Exposure is the nature and degree to which a system is exposed to significant climatic variations.

Sensitivity is the degree to which a system is affected, either adversely or beneficially, by climate-related stimuli. The effect may be direct (e.g., a change in crop yield in response to a change in the mean, range, or variability of temperature) or indirect (e.g., damages caused by an increase in the frequency of coastal flooding due to sea level rise).

Adaptive capacity which is the ability of a system to adjust to climate change (including climate variability and extremes) to moderate potential damages, to take advantage of opportunities , or to cope with the consequences.

Vulnerability Assessment

Is the systematic examination of impacts of climate change and disasters on natural and socio-economic systems ²⁵. It is the key component of climate change adaptation which seeks to establish the elements exposed, describe their intrinsic characteristics that make them sensitive to the climate stimulus, estimate

²³ United Nations International Strategy for Disaster Reduction , UNISDR Terminology on Disaster Risk Reduction, 2009.

²⁴ IPCC, Working Group II, Climate Change 2001: Impacts, Adaptation, and Vulnerability, 2001

possible direct and indirect impacts, and determine the level of adaptive capacities to cope with the potential impacts. These shall be the basis for identifying the necessary measures for adaptation and mitigation.

Climate Change Adaptation

In human systems, the process of adjustment to actual or expected climate and its effects, in order to moderate harm or exploit beneficial opportunities. In natural systems, the process of adjustment to actual climate and its effects; human intervention may facilitate adjustment to expected climate ²⁶. In the context of land use planning, planned adaptation is the result of a deliberate policy decision, based on an awareness that conditions have changed or are about to change and that action is required to return to, maintain, or achieve a desired state.

Climate Change Mitigation

In the context of climate change, climate change mitigation refers to human intervention to address anthropogenic emissions by sources and removals by sinks of all GHG, including ozone- depleting substances and their substitutes ²⁷.

The correspondence between the risk and vulnerability frameworks


To facilitate the understanding of the risk and vulnerability frameworks, discussed below are the correspondence of the two frameworks.

Figure A2. Correspondence of the IPCC Vulnerability and UN Risk Frameworks

236

²⁶ IPCC, Working Group II, Climate Change 2001: Impacts, Adaptation, and Vulnerability, 2001

²⁷ Ibid

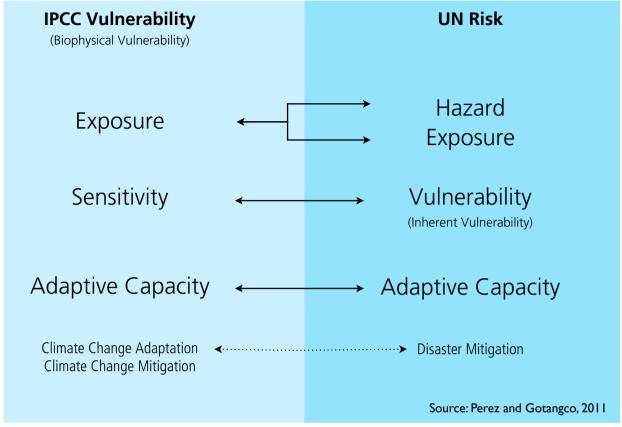

Note: Not a strict correspondence but a rough mapping to facilitate linking and understanding of frameworks.

Vulnerability

The natural hazards community, which emphasizes risk, and the climate change community, which emphasizes vulnerability, are essentially examining the same processes. However, this has not always been immediately apparent, due to differences in terminology. The separation of vulnerability into social and biophysical vulnerability enables us to appreciate the compatibility of the risk-based and vulnerability-based approaches²⁸.

- 1. Biophysical Vulnerability The concept of biophysical vulnerability addresses the same issues as the concept of risk or, adopting the more precise terminology of Sarewitz et al. (2003), outcome risk. Both [outcome] risk and biophysical vulnerability are functions of hazard and social vulnerability. The essential equivalence of [outcome] risk and biophysical vulnerability as described above is further illustrated by a report from the International Strategy for Disaster Reduction which separates "risk factors" into two components: "hazard (determines geographical location, intensity and probability)" and "vulnerability/capacities (determines susceptibilities and capacities)" (United Nations, 2002, p.66)²⁹.
- 2. Social or inherent Vulnerability a state that exists within a system before it encounters a hazard event that makes human societies and communities susceptible to damage from external hazards (e.g. poverty and marginalisation, gender, age, health, food entitlements, access to insurance, and housing guality). For non-

²⁸ Brooks, Vulnerability, risk and adaptation: A conceptual framework, 2003, p.7

²⁹ Ibid, p.8

human systems, "inherent vulnerability" may be used. The "sensitivity" under the IPCC framework and the "vulnerability" under the disaster risk framework fall under this category³⁰.

Hazard and Exposure

Climate-related, or 'hydro-meteorological' hazards only represent one type of hazard dealt with by the disaster management community. The full range of hazards that DRR can encompass includes natural (e.g. geological, hydro-meteorological and biological) or those induced by human processes (e.g. environmental degradation and technological hazards). Therefore, DRR expands beyond the remit of climate change adaptation. Similarly, climate change adaptation moves outside the realm of most DRR experience, to address longer term impacts of climatic change such as loss of biodiversity, changes in ecosystem services and spread of climate-sensitive disease, and are less likely to be addressed by the DRR community. Also, DRR focuses on reducing foreseeable risks based on previous experience, whereas adaptation originates with environmental science predicting how climate change will be manifested in a particular region over a longer time period³¹. Disaster Risk Reduction Management, traditionally encompasses discrete, recurrent and rapid onset hazards, while the climate change can be considered to represent the continuous and slow-onset hazards³².

The principal difference between the natural hazards risk-based approach and the IPCC biophysical vulnerability approach is that risk is generally described in terms of probability, whereas the IPCC and the climate change community, in general, tend to describe (biophysical) vulnerability simply as a function of certain variables. Disaster risk reduction practitioners usually assess vulnerability and capacities to respond to hazard events expected in the next season or years (e.g., hurricane seasons); whereas climate change experts are more likely to consider the long term impacts, in decades and centuries, of climate variability and change as well as related environmental change (e.g., degradation of coastline and sea level rise)³³.

Exposure in the risk framework refers to the elements exposed to the potential hazard, whereas exposure in the IPCC framework refers to the degree of climate stress upon a particular unit analysis represented as either a long-term change in climate conditions, or by changes in climate variability, including the magnitude and frequency of extreme events. Hazard and exposure are two distinct variables in the risk framework, while exposure in the IPCC framework already incorporates the hazard variable.

Adaptive Capacity

Some disaster risk reduction practitioners use the concept of coping, and the term coping capacities in particular, to describe the use of mechanisms to reduce the adverse consequences and effects of disasters. Other disaster risk reduction managers, particularly those working in the interface with climate change issues, see a fundamental difference between coping and adapting. Climate change experts use the term adaptation to denote approximately the same concepts covered under "coping"/"coping strategies" (as denoted by the disaster risk reduction community). Yet many in the climate change community also differentiate between coping and adapting. Coping is used for short-term (or reactive) adjustments while adapting for long term (or proactive) ones³⁴.

238

³⁰ Climate Change Commission-Deutsche Gesellschaft fur Internationale Zeusammenarbeit, CLUP Resource Book Integrating Climate Change Adaptation and Disaster Risk Reduction and Management, 2013, p34.

³¹ Venton et. al, Linking climate change adaptation and disaster risk reduction, Tearfund, 2008

³² Climate Change Commission-Deutsche Gesellschaft fur Internationale Zeusammenarbeit, CLUP Resource Book Integrating Climate Change Adaptation and Disaster Risk Reduction and Management, 2013, p35.

³³ Working Group on Climate Change and Disaster Risk Reduction of the Inter-Agency Task Force on Disaster Reduction (IATF/DR), On Better Terms: A Glance at Key Climate Change and Disaster Risk Reduction Concepts, 2006

³⁴ Ibid

Mitigation and Adaptation

Climate change mitigation measures recognize that the amount of Greenhouse gases in the atmosphere will influence the rate and magnitude of climate change. Therefore, it is within the capacity of humans to influence their exposure to change. Mitigation, in the context of risk reduction and management, refers to structural and non-structural measures implemented to reduce the impacts of natural hazards, environmental degradation and technological hazards. The climate change community would term these disaster mitigation activities as adaptation, although these activities would represent only one type of adaptation, namely reactive adaptation. The term adaptation to climate change embraces broader and more comprehensive activities³⁵.

Climate and Disaster Risk Assessment (CDRA)

In this supplemental guidelines, the two frameworks will be operationalized in the form of two distinct assessment tools: the Disaster Risk Assessment (DRA) and Climate Change Vulnerability Assessment (CCVA) incorporated as part of the Climate and Disaster Risk Assessment (CDRA). The CDRA is intended to determine the major decisions areas characterized as areas at risk to natural hazards (established using the DRA) that can be exacerbated by its vulnerability to climate change (identified in the CCVA). Both tools are intended to describe the elements exposed to hazards/climate stimuli, identify the underlying factors contributing to sensitivities and vulnerabilities, and assess their adaptive capacities. These shall provide the basis for identifying possible interventions for risk reduction, climate change adaptation and mitigation.

References

Asian Disaster Preparedness Center, Community-based Disaster Risk Management for Local Authorities, 2006

Asian Disaster Preparedness Center, Promoting Use of Disaster Risk Information in Land-use Planning, 2011.

AusAID, Project Document: Building the Resilience and Awareness of Metro Manila Communities to Natural Disasters and Climate Change Impacts, 2011

Brooks, Vulnerability, risk and adaptation: A conceptual framework, 2003

Cabrido, C. (et al.), Training Modules and Manual on Mainstreaming Climate Change and Disaster Risk Reduction in the Provincial Development and Physical Framework Plan, Sectoral Vulnerability Tool: Mainstreaming Guidelines. 2012.

Climate Change Commission, National Framework Strategy on Climate Change 2010-2022, 2010.

Climate Change Commission, National Climate Change Action Plan 2011-2028, 2011.

Department of Agriculture, Policy and Implementation Program on Climate Change, 2011.

Department of Interior and Local Government-Bureau of Local Government Development, Rationalizing the Local Planning System: A Source Book, 2008.

Dickson, Eric, Judy L. Baker, Daniel Hoornweg, Asmita Tiwari. 2012. Urban Risk Assessments: Understanding Disaster and Climate Risk in Cities. Urban Development Series. Washington DC: World Bank. DOI: 10.1596/978-0-8213-8962-1. License: Creative Commons Attribution CC BY 3.0.

Downing, T.E. et al., Vulnerability indices: Climate change impacts and adaptation. Policy Series, 3, Nairobi: UNEP. 2001

Environment Management Bureau -Department of Environment and Natural Resources, Vulnerability and Adaptation (V&A) Assessment Toolkit, (n.d).

German and Foreign Affairs Office and Earthquake and Megacities Initiative, Risk sensitive land use plan of Katmandu Metropolitan City, Nepal, 2010.

GIZ-MO-ICRAF, 2011: Patterns of vulnerability in the forestry, agriculture, water, and coastal sectors of Silago, Southern Leyte, Philippines, ISBN: 978-971-94565-1-3

GIZ-UNDP-UNISDR, Handbook on Good Building Design and Construction in the Philippines, 2008

Housing and Land Use Regulatory Board, CLUP Guidebook: A guide to Comprehensive Land Use Planning, 2006.

Housing and Land Use Regulatory Board, Climate Change Commission, Manila Observatory, Deutsche Gesellschaft fur Internationale Zeusammenarbeit, CLUP Resource Book, Integrating Climate Change Adaptation and Disaster Risk Reduction and Management, 2012.

SUPPLEMENTAL GUIDELINES ON MAINSTREAMING CLIMATE AND DISASTER RISKS IN THE COMPREHENSIVE LAND USE PLAN

- IPCC, Managing the Risks of Extreme Events and Disasters to Advance Climate Change Adaptation. A Special Report of Working Groups I and II of the Intergovernmental Panel on Climate Change [Field, C.B., V. Barros, T.F. Stocker, D. Qin, D.J. Dokken, K.L. Ebi, M.D. Mastrandrea, K.J. Mach, G.-K. Plattner, S.K. Allen, M. Tignor, and P.M. Midgley (eds.)]. Cambridge University Press, Cambridge, UK, and New York, NY, USA, 582 pp., 2012
- IPCC, Managing the Risks of Extreme Events and Disasters to Advance Climate Change Adaptation. A Special Report of Working Groups I and II of the Intergovernmental Panel on Climate Change, 2012
- IPCC, Working Group II, Climate Change 2001: Impacts, Adaptation, and Vulnerability, 2001
- Ministry of Home Affairs-Natural Disaster Management Division, India, Proposed Amendment in Town and Country Planning Legislations, Regulations for Land Use Zoning, Additional Provisions in Development Control Regulations for Safety & Additional Provisions in Building Regulations / Byelaws for Structural Safety in Natural Hazard Zones of India, 2004.
- National Disaster Risk Reduction Management Council, National Disaster Risk Reduction and Management Framework, 2011.
- National Disaster Risk Reduction and Management Council, National Disaster Risk Reduction and Management Plan, 2012.
- National Economic and Development Authority-Housing and Land Use Regulatory Board, Draft Reference Manual on Mainstreaming Disaster Risk Reduction and Climate Change Adaptation in the Comprehensive Land Use Plans, (n.d).
- National Economic and Development Authority-National Land Use Committee, Briefing presentation: Updates on the Formulation of the Study for the National Spatial Strategy, 2012.
- National Economic and Development Authority-National Land Use Committee, National Framework for Physical Planning Executive Summary, 2001-2030, 2001.
- National Economic Development Authority, Mainstreaming Disaster Risk Reduction in Subnational Development and Land Use/ Physical Planning in the Philippines, 2008.
- Partnership for Economic Policy, Community Based Monitoring System, Barangay Profile Questionnaire, VN 01-2011-01, 2011.
- Partnership for Economic Policy, Community Based Monitoring System, Household Profile Questionnaire, VN 01-2011-01, 2011.
- Pütz, M., Kruse, S., Butterling, M. (2011): Assessing the Climate Change Fitness of Spatial Planning: A Guidance for Planners. ETC Alpine Space Project CLISP.
- Philippines-Canada Local Government Support Program, How to Formulate an Executive and Legislative Agenda for Local Governance and Development: A Manual, 2008.
- Republic Act 7160, or the Local Government Code of 1991,
- Republic Act 9279 or the Philippine Climate Change Act of 2009.
- Republic Act 10121, Philippine Disaster Risk Reduction and Management Act of 2010.

SUPPLEMENTAL GUIDELINES ON MAINSTREAMING CLIMATE AND DISASTER RISKS IN THE COMPREHENSIVE LAND USE PLAN

Reves, C.M. (et. al), Community-Based Monitoring System in the Philippines, 2007.

Tanhueco, R.T et. al, Risk Sensitive Land Use Planning of Kathmandu Metropolitan City, Nepal:Framework and Process, EMI.

United Nations Development Program, Project Document: Building Community Resilience and Strengthening Local Government Capacities for Recovery and Disaster Risk Management, 2010

United Nations Development Program, Project Document: Enhancing Greater Metro Manila's Institutional Capacities for Effective Disaster/ Climate Risk Management towards Sustainable Development, (n.d)

United Nations International Strategy for Disaster Reduction, How To Make Cities More Resilient, 2012.

United Nations International Strategy for Disaster Reduction, UNISDR Terminology on Disaster Risk Reduction, 2009.

United Nations Framework Convention on Climate Change, Background paper on Integrating socio-economic information in assessments of impact, vulnerability and adaptation to climate change, (n.d)

Venton et. al, Linking climate change adaptation and disaster risk reduction, Tearfund, 2008

Working Group on Climate Change and Disaster Risk Reduction of the Inter-Agency Task Force on Disaster Reduction (IATF/DR), On Better Terms: A Glance at Key Climate Change and Disaster Risk Reduction Concepts, 2006

International Strategy for Disaster Reduction, UNISDR Terminology on Disaster Risk Reduction, 2009.

Project Core Team

Supervising Commissioner

Atty. Linda L. Malenab-Hornilla, MNSA

Policy and Development Group

Dir. Nora L. Diaz
Emma C. Ulep
Annabelle F. Guanzon
Evelyn D. Gatchalian
Ibani C. Padao
Julia Angela Mae E. Collado
Belmar S. Lasam, Jr
Angelito F. Aguila
Julie Murita A. Torres

Regional Field Offices

Rey Niog Rose Marie Bermejo Zenaida Estur Maria Amoroso Elizabeth Bandojo Jovita Solarte Eden Santiago Harvey Villegas

Support Staff

Angelita C. Agustin Eleanor Sandoval Jemima Ragudo Josefina de Lara









Housing and Land Use Regulatory Board Empowered lives. Resilient nations.

